


SPK

PRE-SET TORQUE WRENCHES

Audible and tangible "CLICK" when the set torque is reached, assuring a securely tightened joint. This series is well-suited for production line use.

FEATURES

- A single function wrench, used for a single setting combination of fastener size and torque setting.
- Most suited for tightening multiple same-size fasteners at the same torque in a production line.
- Setting confirmation unnecessary.
- Can be used effectively in confined spaces.
- Tightening to set torque only in the direction of the arrow indicator, but can be used for general tightening in the other direction as well.
- Accuracy : $\pm 3\%$ of pre-set value

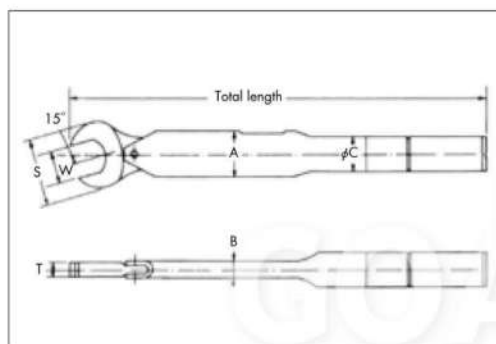

SPK (Metal Handle)



(N) 80~670 SPKH (with Rubber Grip)

EXAMPLE OF ORDER

Model	Size(W)	Pre-set Value
N190SPK	10	14N·m

Model (kgf·cm)	Range	Old Model (N·m)	New Model (N·m)	Range	Spanner sizes (W)						Total length mm	Dimensions (mm)					Weight kg	
	kgf·cm			N·m								Head		Body				
							S	T	A	B		C						
30SPK	5 ~ 30	N30SPK	N3SPK	0.5 ~ 3	5.5	6					152	24	5	19.5	7.5	15	0.1	
					7	8	9	10										
80SPK	15 ~ 80	N80SPK	N8SPK	1.5 ~ 8	5.5	6	7				175	24	5	19.5	7.5	15	0.11	
					8	9	10	11	12	13								
190SPK	35 ~ 190	N190SPK	N19SPK	3.5 ~ 19	10	11					203	27	7	19.5	7.5	15	0.15	
					12	13	14				205	30						
					17	19					213	35						
					10	11	12	13	14		248	35						
380SPK	80 ~ 380	N380SPK	N38SPK	8 ~ 38	17	19					252	39	8	26.6	8.2	20	0.29	
					21	22	23	24			256	45						
					26	27	29	30	32		264	52						9
					14	17	19	21			319	45						10
670SPK	130 ~ 670	N670SPK	N67SPK	13 ~ 67	22	24	26				325	50	11	25.8	9.7	20	0.45	
					27	30	32				330	56					0.46	
					36	41					342	65					0.47	
					17	19	22				390	52					0.49	
1200SPK	240 ~ 1,200	N1200SPK	N120SPK	24 ~ 120	24	26	27				397	57	12	32.8	11.3	25	0.75	
					29	30	32				403	62					0.77	
					36	41					404	64					14	0.79
					19	22					435	53					12	0.81
1600SPK	300 ~ 1,600	N1600SPK	N160SPK	30 ~ 160	24	26					442	56	12	32.8	11.3	25	0.94	
					27	30	32	36			449	64					14	0.97
					41						457	73					14	0.99
					19	22												
2200SPK	450 ~ 2,200	N2200SPK	N220SPK	45 ~ 220	24	27					585	72	15	35.6	12.5	27.2	1.1	
					30	32	36											
					41						597	82						1.4
					22	24					650	67						1.5
3100SPK	650 ~ 3,100	N3100SPK	N310SPK	65 ~ 310	27	30	32				654	72	16	38.0	16	30	1.3	
					36	41					662	82					1.32	
					24	27					833	74						1.4
4200SPK	900 ~ 4,200	N4200SPK	N420SPK	90 ~ 420	30	32					838	78	18	43.3	17.8	34	1.45	
					36						843	82					1.46	
					41						847	88					1.47	
					46						860	94					1.5	
																	1.52	

* is the new model that is applied from 1st January, 2016.