




Mikrosize®

TOUCH SCREEN MICRO VICKERS HARDNESS TESTER





Testing Interface

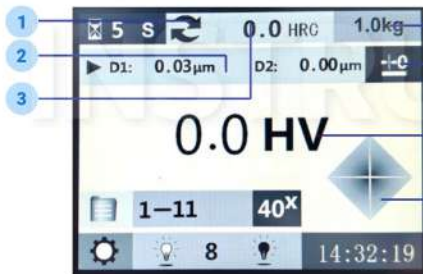

1. Hardness conversion
2. Measure diameter
3. Hardness conversion value
4. Current load
5. Eyepiece zeroing
6. Hardness value
7. Start

Dimension

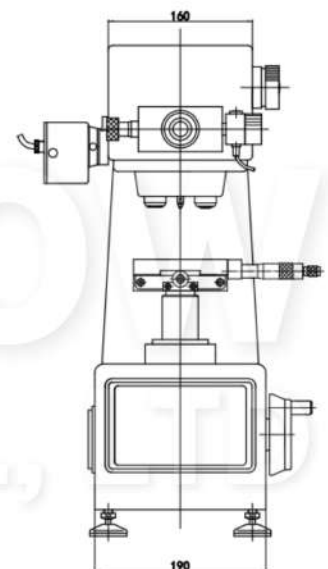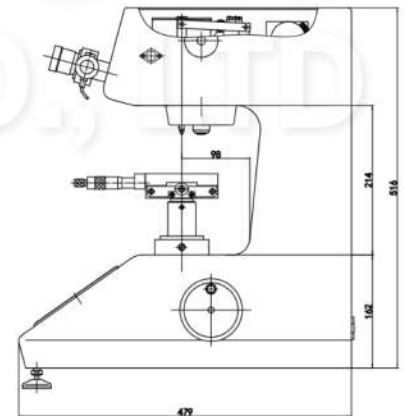

Model	MVicky-1000T
Test Force	98.07N(10kg), $\pm 2.0\%$
Total Test Force	0.098N(10gf) 0.245N(25gf) 0.49N(50gf) 0.9807N(100gf) 1.961N(200gf) 2.942N(300gf) 4.903N(500gf) 9.807N(1kgf)
Loading Method	Auto Loading , Dwelling, Unloading
Turret	Auto
Dwelling Time	0~60s(every 5 seconds as one unit)
Eyepiece	0.1HR
Hardness Scale	10X
Objective	10x(observation) , 40x(measurement)
Total Magnification	100x(observation) , 400x(measurement)
X-Y Test Anvil	Size: 100x100 mm, Travel: 25x25mm, Resolution: 0.01mm
Test Height	90mm
Test Throat	100mm
Net Weight	31kg
Machine Dimension	480x325x545mm (LxWxH)
Power Supply	AC110/220 V/50~60 Hz
Working Environment	In the range of $(23 \pm 5) ^\circ\text{C}$ at room temperature. Placed horizontally on a solid foundation. No corrosive media around it in a vibration-free environment. Indoor relative humidity is not more than 65%



CERTIFICATE ISO/IEC 17025



บริการติดตั้ง สอนการใช้งาน



รับประกัน 1 ปี (ภายใต้การใช้งาน)