




Mikrosize®

CNC Video Measuring System



Model	VMU-3020	VMU-4030	VMU-5040
X,Y- axis Travel Distance (mm)	300 x 200	400 x 300	500 x 400
Z-axis Travel Distance(mm)	200		
Net Weight(KG)	120	150	180
X,Y-axis Accuracy(μm)	E1(x/y) - 2.5+L/100		
Loading Stage	25kg		
Motion System	X,Y,Z Axes : Lead Screws		
Motion Control	CNC Auto Servo Movement Control		
Video Total Magnification	Hikvision 1/2' color CCD camera Auto Coaxial Zoom Lens		
Repeatability(um)	±2		
Optical magnification	0.7-4.5x; video magnification: 20-148x		
Working distance (standard)	92mm		
Object View (Standard)	11.1~1.7mm		
Speed (mm/s)	X, Y Axis : 200 Z Axis : 50		
Illumination	Contour Light : Adjustable 256-level LED parallel illumination Surface Light : 256-level adjustable 5-ring 8-zone LED cold illumination		
3D Measurement	3D module and renishaw (UK) contact probe		
Measurement Software	Mikromea-cnc 2.5d CNC measurement software		
Working Environment	Temperature: 20°C ± 2°C, temperature variation < 2°C/hour, humidity: 30~80%		
Power Supply	AC 100~220V 50/60HZ 10A		



1.Simple and friendly

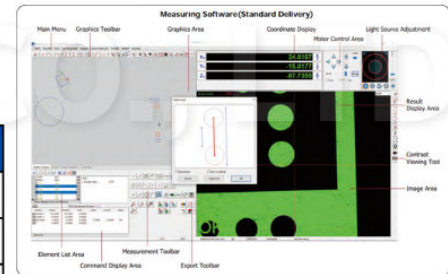

2.Powerful geometric measurement function



3D Measuring Software

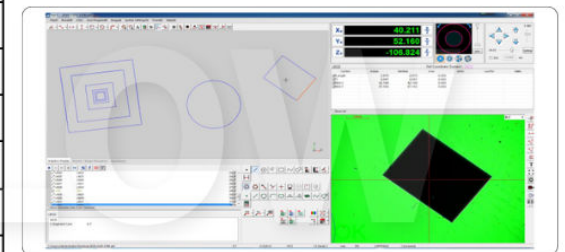

Standard Delivery

Instrument Mainframe	1 Set
Computer set , Table	1 Set
HDMI Cable	1 Pc
Network Port Conversion Interface	1 Pc
USB Dongle	1 Pc
Calibration Block	1 Pc
Network Cable	1 Pc
Software CD	1 Pc



บริการติดตั้ง สอนการใช้งาน



CERTIFICATE ISO/IEC 17025