



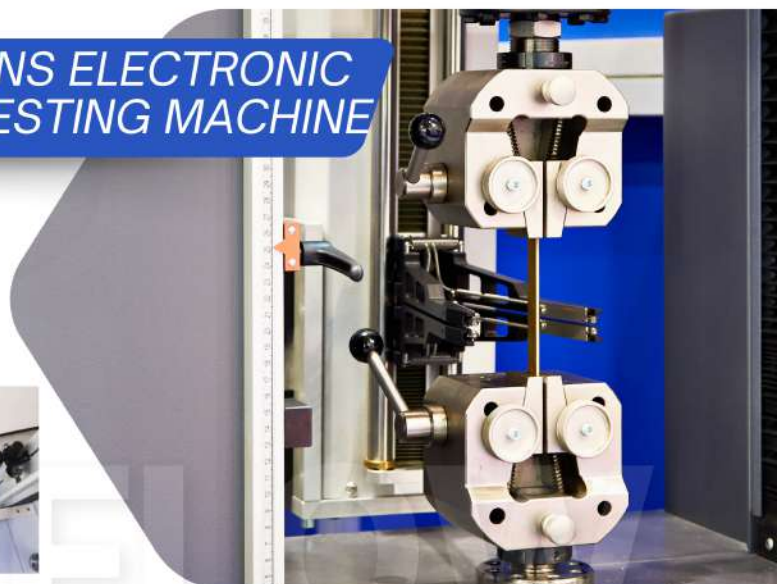

Mikrosize®

DUAL COLUMNS ELECTRONIC UNIVERSAL TESTING MACHINE

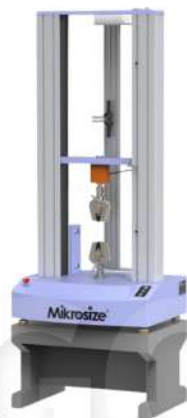

MODEL		UTM-DCH-002	UTM-DCH-005	UTM-DCH-01	UTM-DCH-02	UTM-DCH-05	UTM-DCH-1	UTM-DCH-2	UTM-DCH-5	UTM-DCH-10	UTM-DCH-20	UTM-DCH-30	UTM-DCH-50
Capacity	KN	0.02	0.05	0.1	0.2	0.5	1	2	5	10	20	30	50
	KG	2	5	10	20	50	100	200	500	1000	2000	3000	5000
	lb	4	11	22	44	110	220	440	1102	2204	4409	6613	11023

DUAL COLUMNS ELECTRONIC UNIVERSAL TESTING MACHINE		
Unit Switching		G,Kg,Lb,N,KN
Displacement Unit Switching		Inch/cm/mm
Testing Machine Class		Class 0.5
Effective Force Measurement Range		0.2%~100%FS
Force Accuracy		Within ±0.5% of the indicated value
Force Resolution		1/500000
Displacement Resolution		≤0.05μm
Displacement Accuracy		Within ±0.5% of the indicated value
Deformation Measuring Range		0.2%~100%FS
Precision of Deformation Indication		Within ±0.5% of the indicated value
Large Deformation Measuring Range		1000mm (optional)
Large Deformation Resolution		0.01mm (optional)
Error Limit of Large Deformation Indication		Within ±0.5% of the indicated value (optional)
Maximum Test Speed		500mm/min; The maximum value is 1000mm/min
Minimum Test Speed		0.01mm/min
Velocity Accuracy		Within ±0.5% of the indicated value
Beam Travel	Standard	Test stroke without fixture: 1330mm; Test stroke with fixture: 800mm
Measured Height		Test stroke without fixture: 1330mm; Test stroke with fixture: 800mm
Effective Width	Standard	420mm
Fixture Configuration		A set of tension fixtures; Other fixtures are optional
Return Mode		Manual or automatic
Stop Method		1.The maximum break value automatic stop 2.The upper and lower limit safety setting stop
Safety Device		1. Mechanical stroke switch protection 2. Emergency stop switch emergency braking
Overload Protection		Over 100% of the load, the machine automatically protects
Power Supply		220V.AC/ 50HZ; (110V.AC/60HZ can be selected by country)
Mainframe Dimension/weight		Standard model: L* W* H:800mm*550mm*1700mm/about 185KG Model with base: L* W* H:800mm*550mm*2100mm/about 205KG