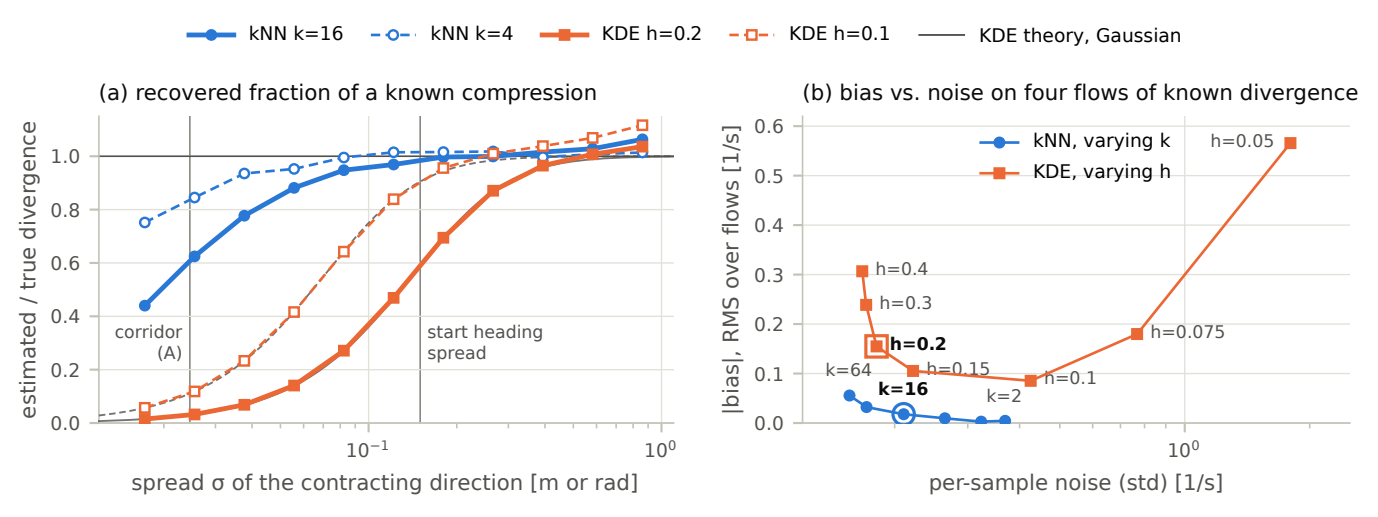
kNN k=16
kNN k=4
KDE h=0.2
KDE h=0.1
KDE theory, Gaussian
(a) recovered fraction of a known compression
estimated / true divergence
1.0
0.8
0.6
0.4
0.2
0.0
corridor
(A)
start heading
spread
10^{-1}
10^{0}
spread σ of the contracting direction [m or rad]
(b) bias vs. noise on four flows of known divergence
|bias|, RMS over flows [1/s]
0.6
0.5
0.4
0.3
0.2
0.1
0.0
kNN, varying k
KDE, varying h
h=0.05
h=0.4
h=0.3
h=0.2
h=0.075
k=64
h=0.15
h=0.1
k=16
k=2
10^{0}
per-sample noise (std) [1/s]