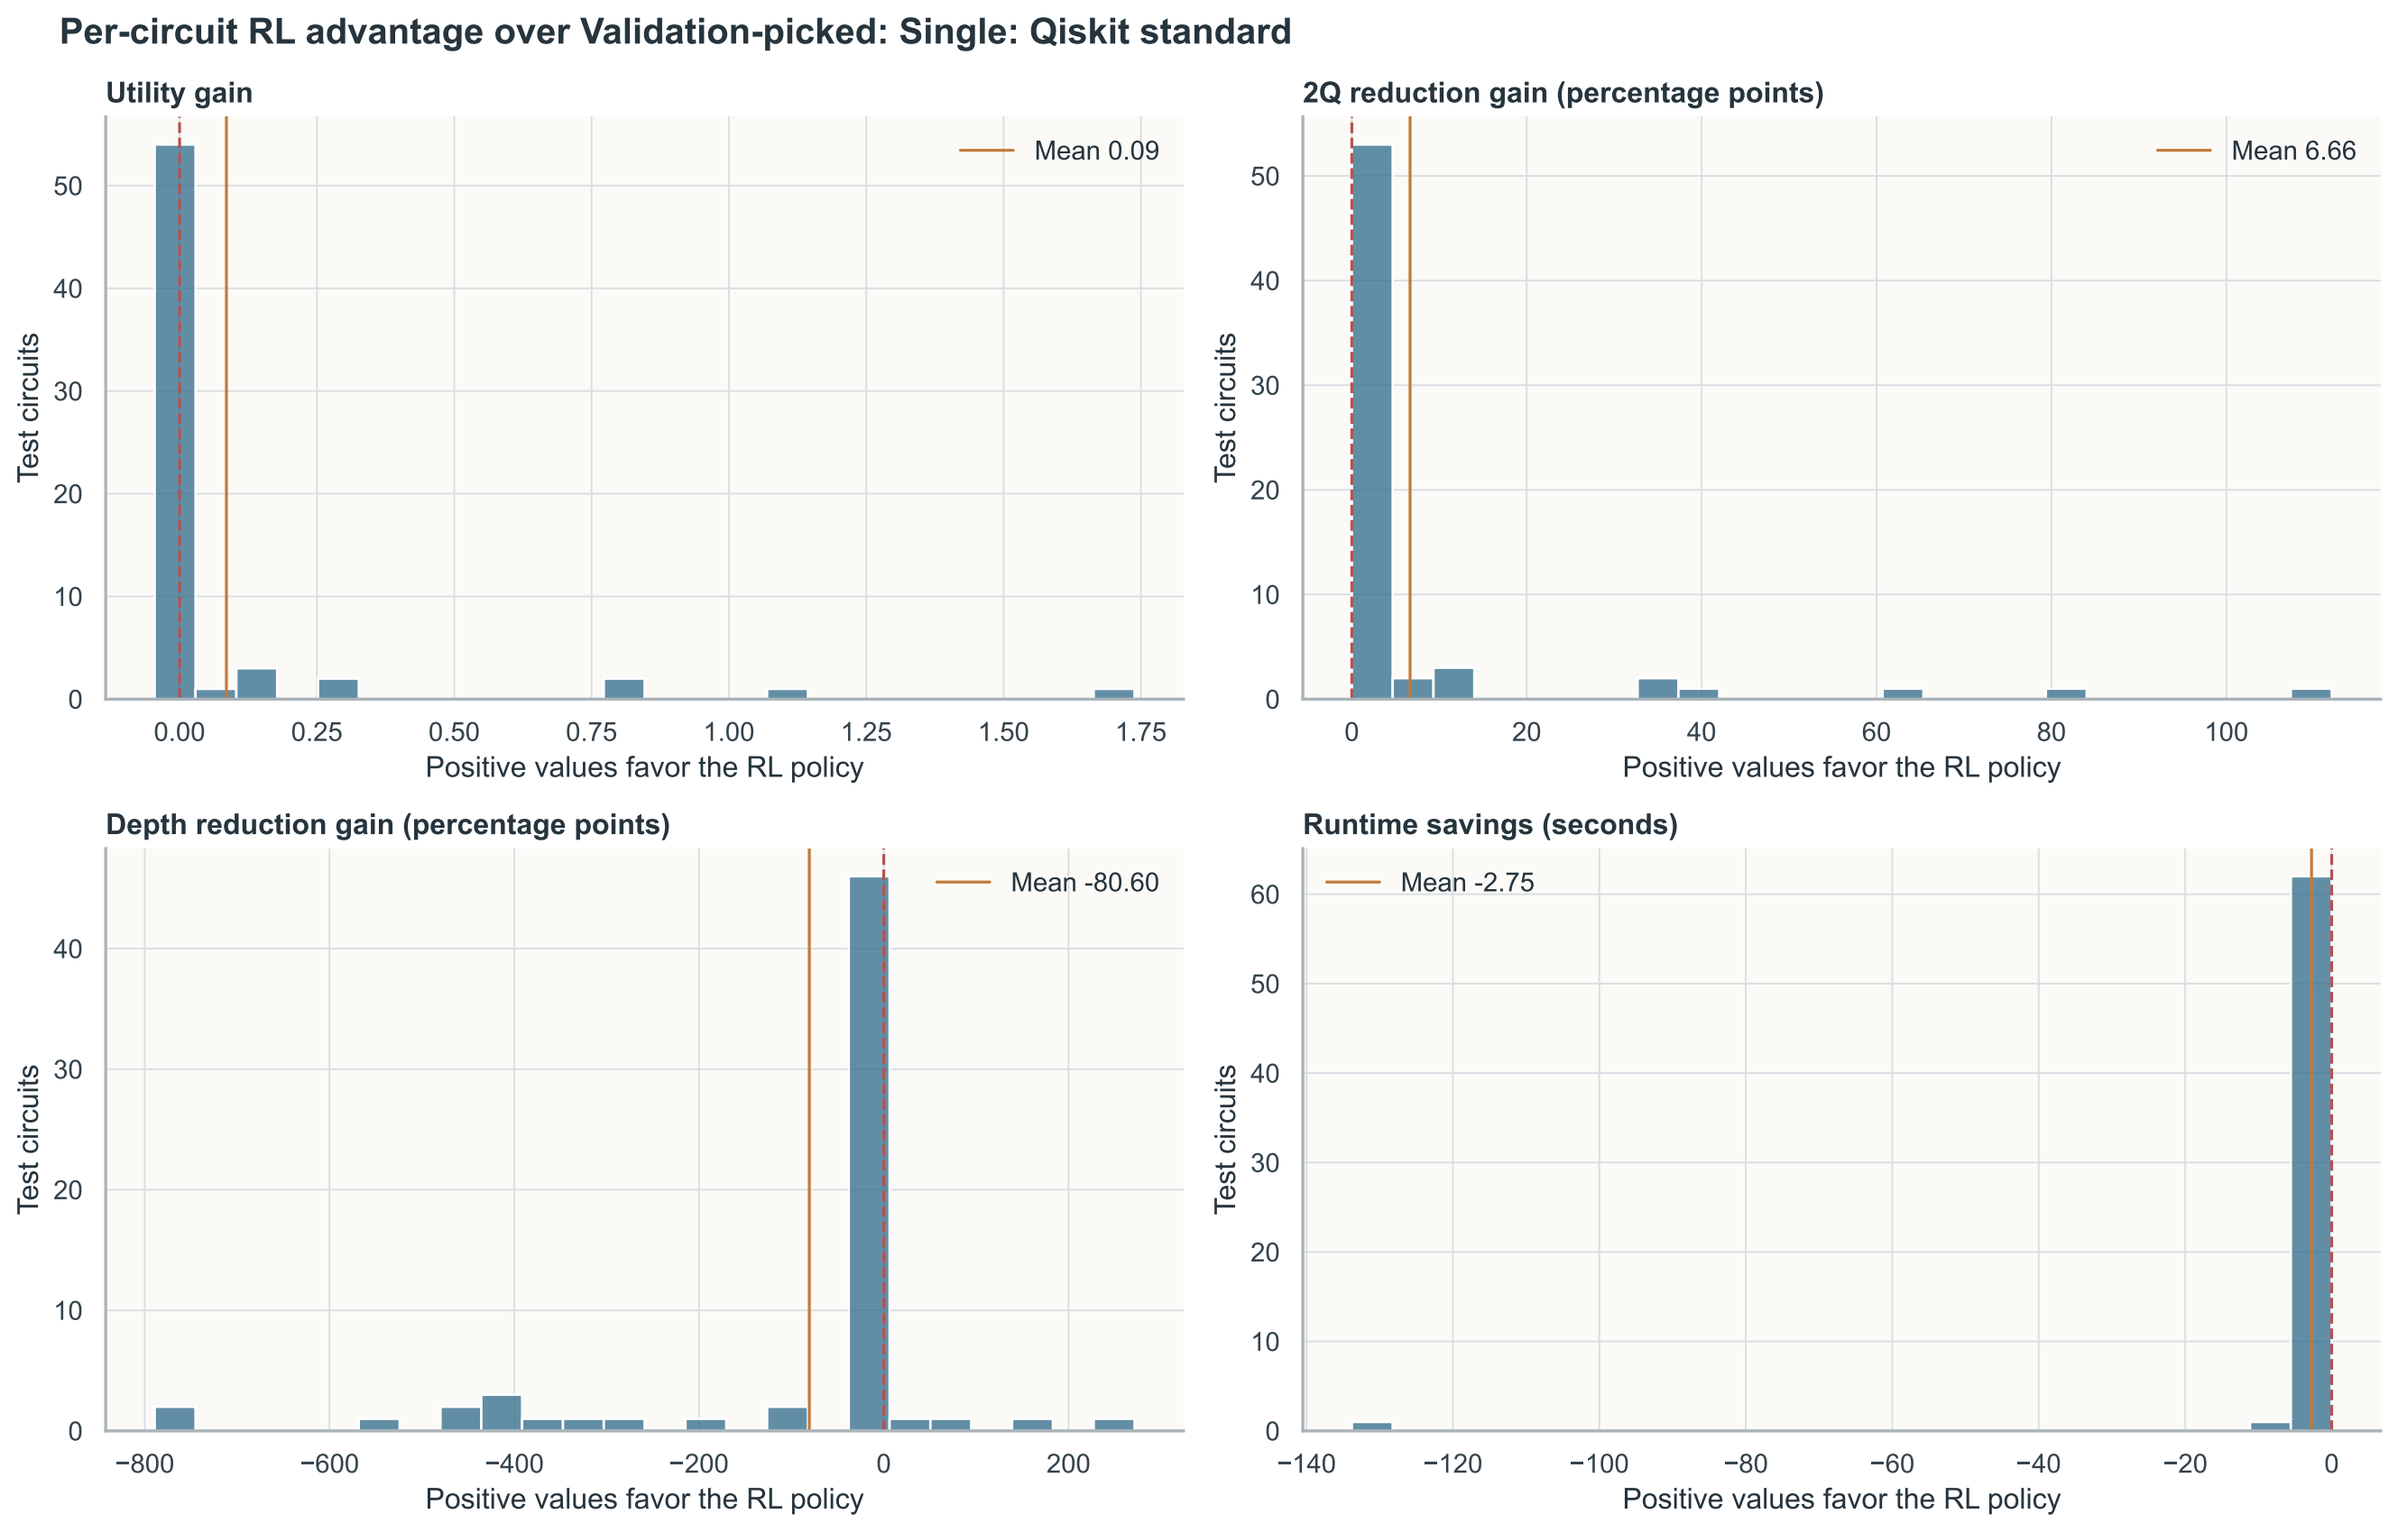
Per-circuit RL advantage over Validation-picked: Single: Qiskit standard
Utility gain
Mean 0.09
Test circuits
Positive values favor the RL policy
2Q reduction gain (percentage points)
Mean 6.66
Test circuits
Positive values favor the RL policy
Depth reduction gain (percentage points)
Mean -80.60
Test circuits
Positive values favor the RL policy
Runtime savings (seconds)
Mean -2.75
Test circuits
Positive values favor the RL policy