



PACKAGING INFORMATION




Size in Cm: Length: 89 - Width: 13 - Height: 18


Code	Description	Pcs/pallet
BE20/200/HS	Electromechanical actuator BRUSHLESS HIGH SPEED, low voltage, super intensive use, with native encoder onboard, irreversible, ideal for swing gates with leaf up to 2,5 mt length, with mechanical stopper in opening and closing.	50

Product technical specifications	BE20/200/HS
Power line supply	230V AC - 50Hz
Motor power supply	36V
Power rating	200W
Frequency of use	Intensive use
Thrust	100 - 2200N
Operating temperature	-20 C° +55 C°
Protection level	IP43
Reductor Type	Irreversible
Manoeuvre speed	3 cm/s
Opening time at 90°	10-15 s
Stroke	400 mm
Limit switch	Mechanical stopper in opening and closing
Encoder	Digital native encoder SENSORLESS 48 PPR
Operating cycles per day (opening/closing - 24 hours no stop)	800
Maximum dimension product in mm (L x W x H)	867 x 105 x 155
Product weight packed (Kg)	8
Number items per pallet	50

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

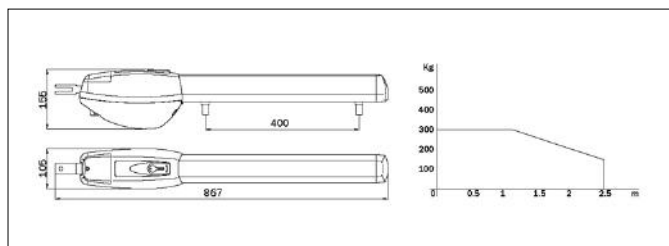

DIMENSIONS

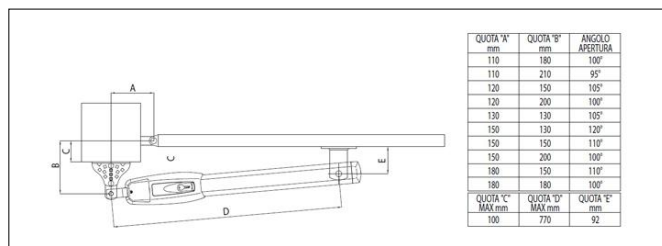

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



MC781
Kit 2 mechanical stop
BR20, BE20 series,
R20/300MS and
R20/500MS.



KT202
Short front hinge plate,
to weld.



KT204
Short rear hinge plate, to
weld.



KT206
Kit 3 hinge plates short,
to weld.



KT206/R
Kit of screw-adjustable
short rear bracket and
screw-welded short front
bracket.



R99/C/001
Signboard Automatic
Opening".