




## TECHNICAL IMAGE



## PACKAGING INFORMATION

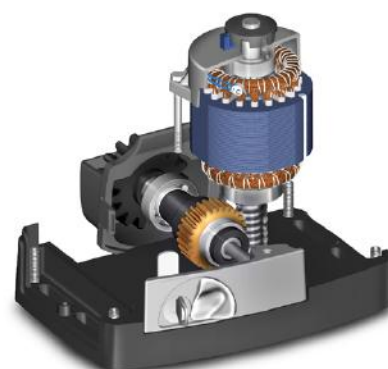


Size in cm: Length: 35 - Width: 23 - Height: 35.5

Code	Description	Pcs/pallet
BM30/304/HS	Electromechanical HIGH SPEED BRUSHLESS motor, low voltage, super intensive use, irreversible, ideal for sliding gates up to 400 kg. with built-in digital controller B70 series, magnetic limit switch.	44

Product technical specifications	BM30/304/HS
Max gate weight	400 kg
Power line supply	230V AC - 50Hz
Motor power supply	24V
Power rating	125W
Max thrust	350N
Operating temperature	-20+55°C
Protection level	IP43
Manoeuvre speed	24 m/min (0.44 m/s)
Reductor Type	Irreversible
Limit switch	Magnetic
Onboard control unit	B70/1DC
Operating cycles per day (opening/closing - 24 hours no stop)	500
Maximum dimension product in mm	L250x 165x H290
Number items per pallet	44

## PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

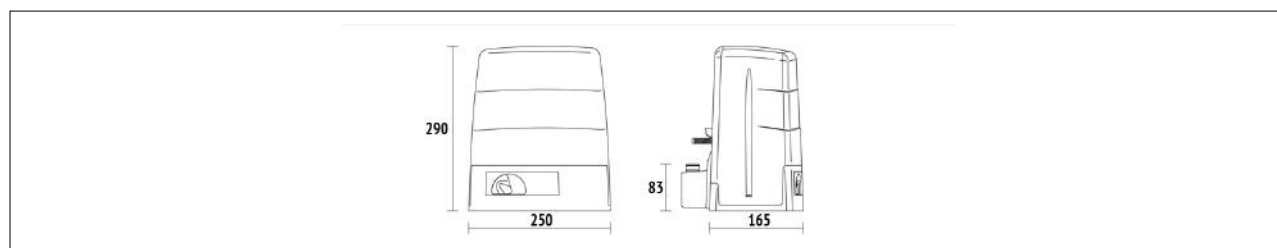

DIMENSIONS

## PRODUCT ACCESSORIES



**KT220**  
Raised fixing plate for  
M30 series.




**KT223**  
Fixing plate with stay  
bolts and screws M30  
series.



**GA550**  
Galvanised steel rack  
22x22x1000 module 4.




**GA551**  
Galvanised steel rack  
30x12x1000 module 4  
with spacers and screws.



**GA553**  
Nylon rack module 4 with  
6 connectors L.1000.



**GA554**  
Pocket of 6 spacers and  
screws.



**MC775**  
Kit magnetic limit switch  
for control unit  
H70/103AC, H70/104AC  
and B70/1DC.



**R99/C/001**  
Signboard Automatic  
Opening\*.