




## Composition SET BH23/284

Code	Description	QTY
<b>BH23/282</b>	Electromechanical articulated motor BRUSHLESS, low voltage, super intensive use, with native encoder onboard, irreversible ideal for swing gates with leaf up to 2.8 meters of length. With mechanical stopper in opening and closing and with standard version of short arms.	2
<b>KIT B70/20</b>	Electronic kit with digital controller 24V B70/2DC/BOX for two motors BRUSHLESS.	1
<b>Composition KIT B70/20</b>		
<b>B70/2DC/BOX</b>	Digital control 24V for 2 BRUSHLESS motor, with plastic box.	1
<b>H93/RX22A/I</b>	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70, EDGE and AG/CTRL.	1
<b>E80/TX52R/2</b>	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
<b>R90/F4ES</b>	Pair of external photocells synchronized 24V AC/DC (max. 4 pairs).	1
<b>FIFTHY/24</b>	LED flashing light series FIFTHY 24V with integrated antenna.	1
<b>R99/C/001</b>	Signboard "Automatic Opening"	1

Product technical specifications	SET BH23/284
Power line supply	230V AC - 50Hz
Motor power supply	24V
Power rating	160W
Frequency of use	Intensive use
Torque	50 - 280 N m
Operating temperature	-20+55° C
Protection level	IP43
Reductor Type	Irreversible
Manoeuvre speed	1 - 1,9 Rpm
Opening time at 90°	12-20 s
Limit switch	Mechanical stopper in opening and closing
Encoder	Digital native encoder SENSORLESS 48 PPR
Operating cycles per day (opening/closing - 24 hours no stop)	1900
Maximum dimension product in mm (L x W x H)	230 x 190 x 284
Product weight packed (Kg)	31,1

## TECHNICAL IMAGE

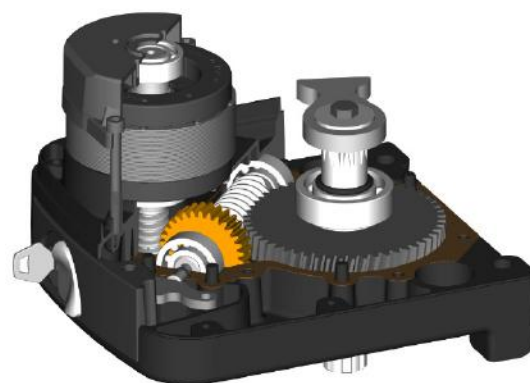

## PACKAGING INFORMATION



### Composition Set:

2 boxes - Size in cm: Length: 35 - Width: 23 - Height: 35.5


1 box - Size in Cm: Length: 50 - Width: 23.5 - Height: 16

## PACKAGING INFORMATION




Size in cm: Length: 35 - Width: 23 - Height: 35.5

## PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

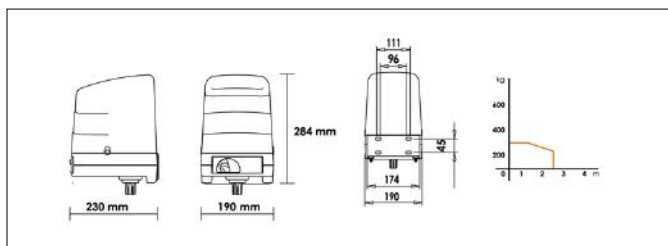

DIMENSIONS

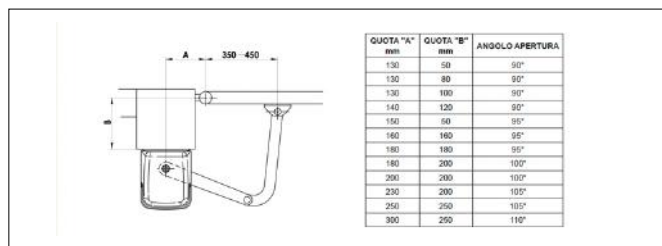


PREDISPOSIZIONE PER L'INSTALLAZIONE STANDARD

## PRODUCT ACCESSORIES



**LT302**  
Arms short for articulated motor.



**KT218**  
Gate pull bracket for series articulated.



**RL671**  
Metallic wire length 3mt for release from outside.



**KT209**  
Plate for fixing to post H23 series.