



PACKAGING INFORMATION




Code	Description	Pcs/pallet
SMARTY4/HS	Low voltage HIGH SPEED Irreversible BRUSHLESS electromechanical gear motor for extremely heavy duty. For swing gates with gate leaf up to 4 m	36

Size in Cm: Length: 117 - Width: 123 - Height: 147

Product technical specifications	SMARTY4/HS
Power line supply	230V AC - 50Hz
Motor power supply	36V
Power rating	200W
Frequency of use	Intensive use
Thrust	600 - 7000N
Operating temperature	-20 C° +55 C°
Protection level	IP44
Reductor Type	Irreversible
Manoeuvre speed	1,6 cm/s
Opening time at 90°	15-25 s
Stroke	370 mm
Limit switch	Mechanical stopper in opening and closing
Encoder	Digital native encoder SENSORLESS 48 PPR
Operating cycles per day (opening/closing - 24 hours no stop)	1000
Maximum dimension product in mm (L x W x H)	1162 x 116 x 165
Product weight packed (Kg)	16,5
Number items per pallet	36

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

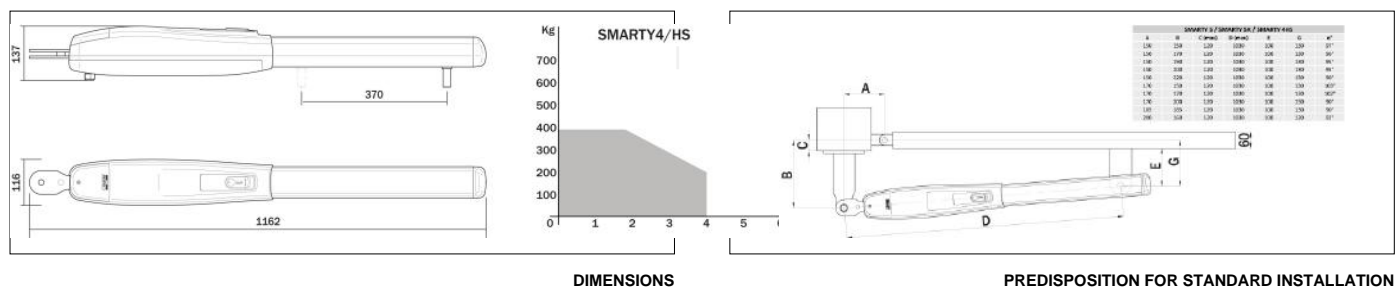

PRODUCT ACCESSORIES

MC782 Kit 2 mechanical stop SMARTY series.	RL669 Kit for release from outside without handle for series SMARTY.	RL671 Metallic wire length 3mt for release from outside.	RL670 European cylinder key for release system series SMARTY - BIONIK.	KT237 Kit 3 hinge plates short, to weld, for series SMARTY5 - SMARTY5/R.	R99/C/001 Signboard Automatic Opening".