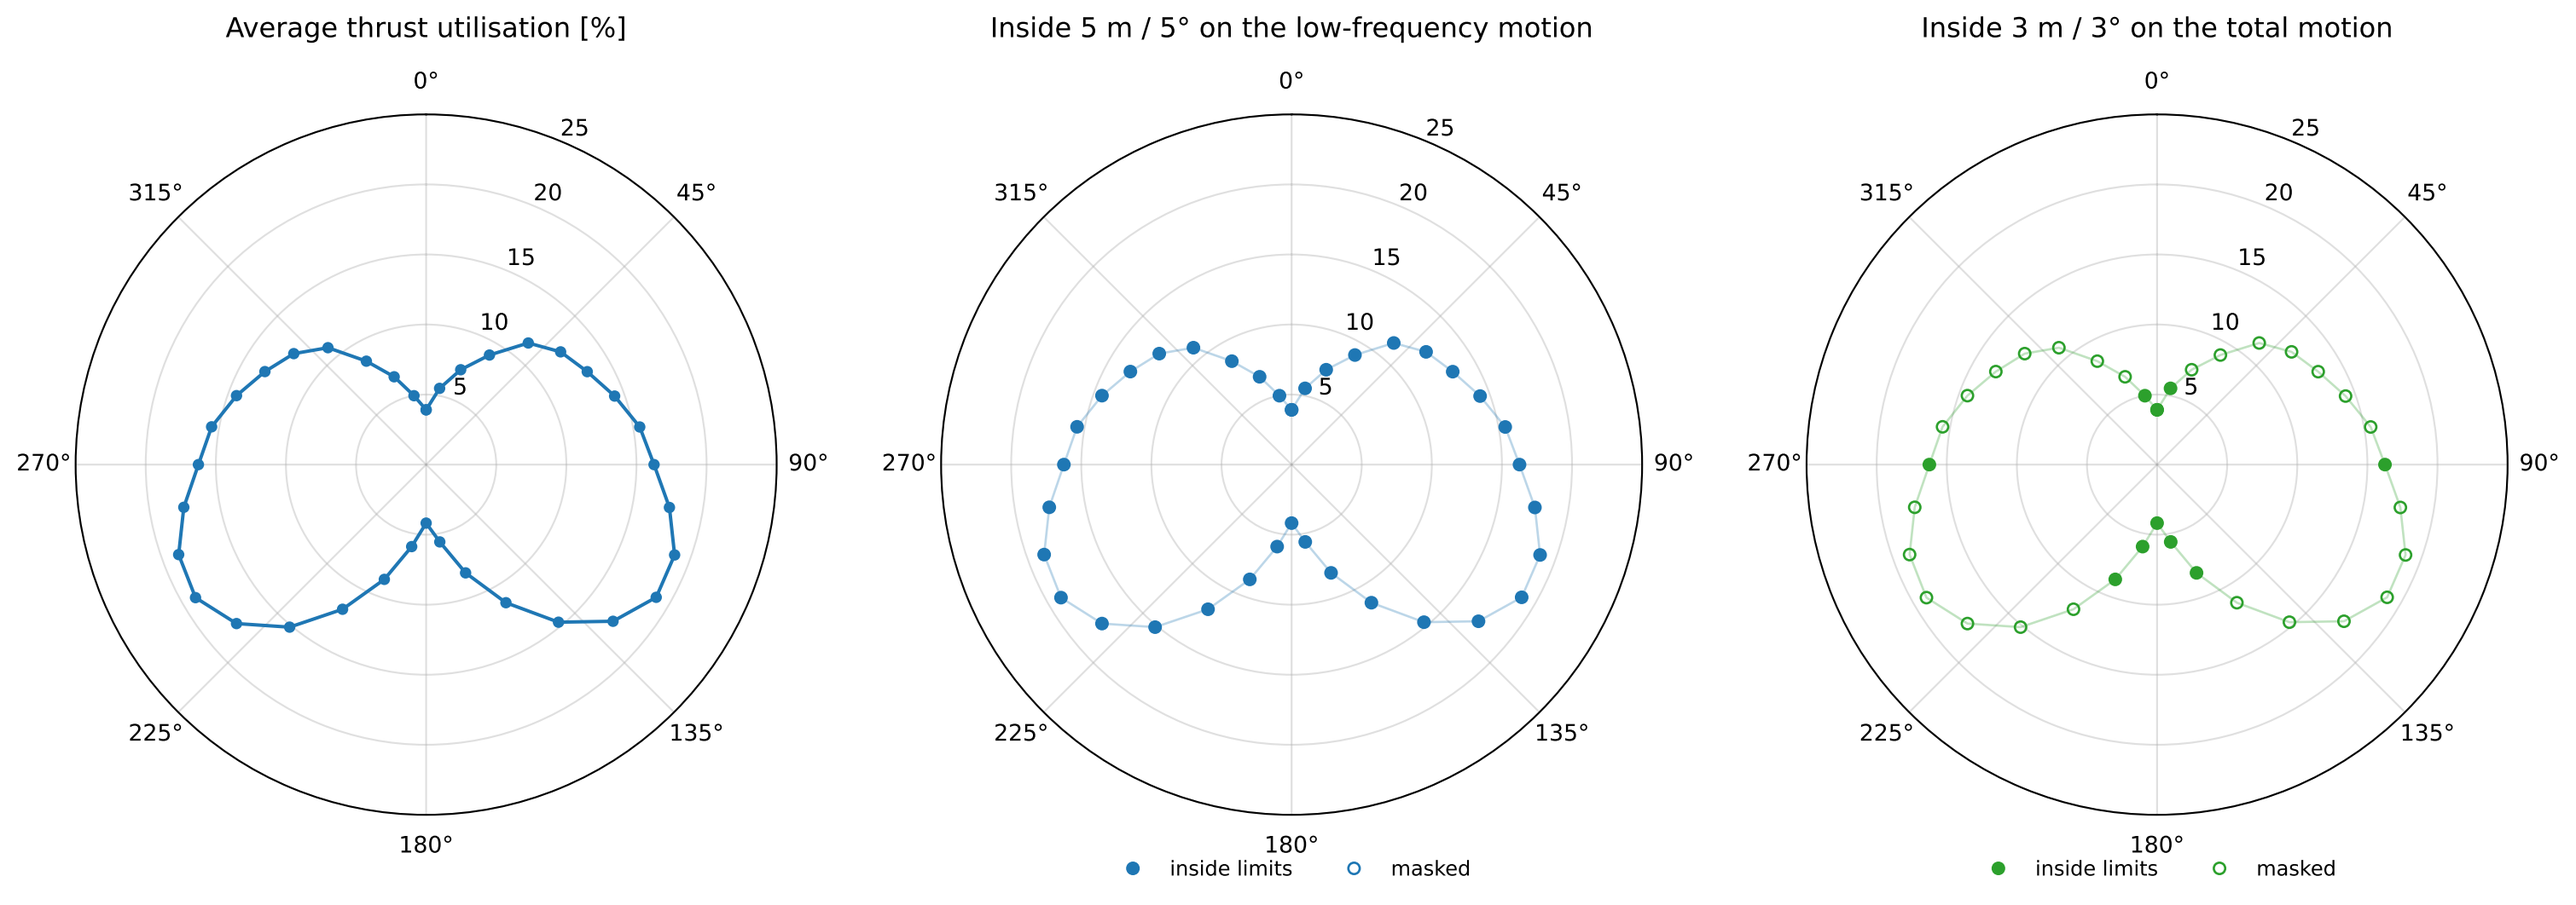
Average thrust utilisation [%]
0°
25
20
15
10
5
45°
90°
135°
180°
225°
270°
315°
Inside 5 m / 5° on the low-frequency motion
inside limits
masked
Inside 3 m / 3° on the total motion
inside limits
masked