

A Multi-Agent Reinforcement Learning Scheme for SFC Placement in Edge Computing Networks

Congzhou Li, Zhouxiang Wu, Divya Khanure and Jason P. Jue

Department of Computer Science, The University of Texas at Dallas, Richardson, Texas 75080, USA

Abstract—In the 5G era and beyond, it is favorable to deploy latency-sensitive and availability-aware services on edge computing networks in which the computing and network resources are more limited compared to cloud and core networks but can respond more promptly. These services can be composed as Service Function Chains (SFCs) which consist of a sequence of ordered Virtual Network Functions (VNFs). To achieve efficient edge resources allocation for SFC requests and optimal profit for edge service providers, we formulate the SFC placement problem in an edge environment and propose a multi-agent Reinforcement Learning (RL) scheme to address the problem. The proposed scheme employs a set of RL agents to collaboratively make SFC placement decisions, such as path selection, VNF configuration and VNF deployment. Simulation results show our model can improve the profit of edge service providers by 12% compared with a heuristic solution.

Index Terms—service function chain, reinforcement learning, edge computing networks, resource allocation

I. INTRODUCTION

Many emerging applications in 5G and beyond require the support of various combinations of network function combinations. Physical network functions may be virtualized as Virtual Network Functions (VNFs) and deployed in the cloud/edge computing networks. To complete specific tasks, the VNFs need to be chained together to form a Service Function Chain (SFC). The user's application traffic will traverse the SFC in sequence to complete the service. For applications which require service with sufficient bandwidth, reliability, and latency constraints, deploying SFCs and serving them at the edge of the network can achieve task offloading and improved quality of service [1]. When the SFC requests arrive at the Access Point (AP) of edge computing networks, due to the stringent performance bound, the planning space for SFC placement is restricted to the local area of AP with limited computing and network resources availability. For edge computing service providers, how to determine the placement plan for SFC requests to achieve optimal profit, while meeting the performance requirement of requests is an issue of significant importance.

In the SFC placement process, the network operator needs to form a routing path for the SFC request and determine the deployment locations of VNFs along the path. The placement locations of VNFs on the path has various choices and we define each possible VNF placement combination as a deployment pattern of the SFC. The reasonable selection from possible patterns can achieve efficient utilization of edge computing resources. For example, in Fig. 1, three SFC requests arrive

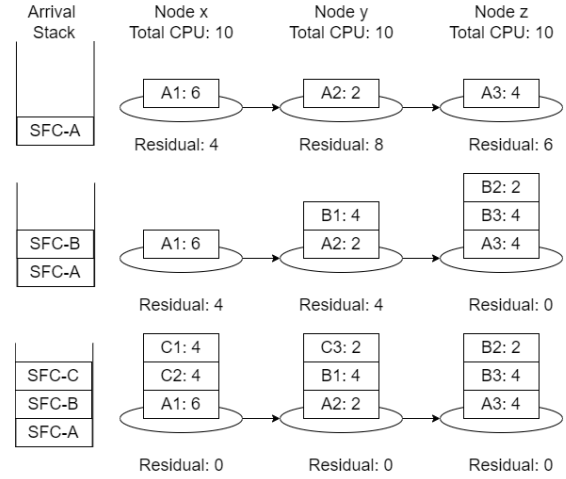


Fig. 1. Example Deployment Patterns of Three SFCs

at the edge computing network in time sequence and are deployed in the same path. By arranging the VNF placement patterns of “SFC-B” and “SFC-C”, the CPU cores installed on each computing node are fully utilized.

Providing replicas for a VNF can increase its reliability. However, if each replica consumes the same amount of computing resources as the original VNF, the cost of reliable SFC deployment can be unreasonably expensive in edge computing environment. In [2], the VNFs can adjust their computing resources allocation during runtime. The replicas of VNF can be allocated with minimum computing resource to keep alive, and be activated with more resources if the primary VNF failed. This work **inspires us that** the reliability of a VNF can be improved by adding replicas of it with minimal resource consumption. The end-to-end delay of a SFC comprises of transmission delay of path links and the processing delay of VNFs. In [3], the authors claim that if the VNFs of a SFC are allocated with additional computation resources, then the transmission delay of this SFC can be compensated by the reduced processing delay of VNFs. This work **inspires us that** in edge computing networks, for those SFC deployment plans whose total delay exceed the latency requirement, we can add more computing resources to VNFs to reduce their processing delays to make such plans become feasible.

In this paper, we propose a RL-based SFC placement scheme in which **a groups** of agents collaborate to make admission and allocation decisions for the placement of SFC

inspires us to believe that

requests in order to maximize profit of edge service providers. To the best of our knowledge, this paper is the first to apply a multi-agent RL-based scheme for the SFC placement problem while considering latency and reliability constraints in edge computing networks. The remainder of this paper is organized as follows. Section II introduces related works on SFC mapping problem. We describe the system model and formulate the problem in Section III. Next, we illustrate our RL-based SFC placement scheme in Section IV. In Section V, we design experiments to evaluate the effectiveness of the proposed scheme. Finally, we conclude the paper in Section VI.

II. RELATED WORKS

[4] proposed a Q-Learning based SFC deployment algorithm in edge environment, their RL agent finds the best location of each VNF, then the SFC path is obtained by connecting VNFs with shortest paths. The bandwidth constraint cannot be guaranteed in this approach. [5] proposed a reliability-aware RL-based SFC scheduling plan, the authors assume all the SFC requests cannot be known in advance, and the SFC is placed by finding the location each VNF in order. In [6], the authors proposed two heuristic algorithms for SFC placement in large scale cloud/edge environments with cost and latency considerations. [7] proposed an online SFC optimization problem and designed an approximation algorithm with a theoretical performance guarantee.

III. SYSTEM MODEL AND PROBLEM FORMULATION

The terms used in the system model and formulation are **concluded** in Table I.

A. Network Model

network is/networks are

The edge computing **networks is** modeled by a graph $G = (N, E)$, $N = N_C \cup N_{AP}$ consists of a set of AP nodes, N_{AP} , and a set of computation nodes, N_C , and E is a set of virtual links abstracted from the infrastructure network. Each node $n \in N_{AP}$ provides service access entrance/exit to service traffic, each node $n \in N_C$ has C^n CPU cores, and each link $e \in E$ has specific bandwidth capacity B^e and delay d_T^e .

B. SFC request model

The set of SFC requests from AP $i \in N_{AP}$ is denoted as S_i . The j -th SFC request from AP i is denoted as $s_{i,j}$, and is a tuple:

$$s_{i,j} = \{src, dst, b_{i,j}, T_{i,j}^\alpha, T_{i,j}^\beta, V_{i,j}, f_{i,j}^{rep}, f_{i,j}^{aug}\}. \quad (1)$$

The elements in the tuple correspond to the source, destination, required bandwidth, initiation time, expiration time, VNF list, replica vector and boost vector. The VNF list contains the VNF instances and their execution order as follows.

$$V_{i,j} = [v_{i,j}^1, v_{i,j}^2, \dots, v_{i,j}^{|V_{i,j}|}]. \quad (2)$$

Each VNF, $v_{i,j}^k$, requires a base number of CPU cores, $c_{i,j}^k$. The replica vector denotes which VNF instances require

TABLE I
NOTATION

Terms	Explanation
S_i	The set of SFC request from $i \in N_{AP}$
$s_{i,j}$	The j -th SFC request in S_i
$T_{i,j}^\alpha$	The arrival time of $s_{i,j}$
$T_{i,j}^\beta$	The departure time of $s_{i,j}$
$T_{i,j}^{dur}$	The duration time of $s_{i,j}$, $T_{i,j}^{dur} = T_{i,j}^\beta - T_{i,j}^\alpha$
$E_{i,j}$	The subset of links used by $s_{i,j}$, $E_{i,j} \subseteq E$
$P_{i,j}$	The profit of serving $s_{i,j}$
$V_{i,j}$	The set of VNFs in $s_{i,j}$
$v_{i,j}^k$	The k -th VNF of $s_{i,j}$
$c_{i,j}^k$	The number of CPU cores required by $v_{i,j}^k$
$\sigma_{i,j}^k$	The additional CPU cores allocated to $v_{i,j}^k$ for boosting
$r_{i,j}^k$	The redundancy CPU cores allocated to replicas of $v_{i,j}^k$
$w_{i,j}^k$	The computation load of $v_{i,j}^k$ in cycles
τ	The processing speed of one CPU core in cycles per second

additional replicas. For example, $f_{i,j}^{rep} = [0, 1, 0]$ indicates that the second VNF in the SFC requires additional replicas to achieve higher reliability. We assume each replica of original VNF instance requires one CPU core. Similarly, the boost vector indicates which VNF instance can be augmented with additional CPU cores beyond its base number of CPU cores to reduce processing time. For example, $f_{i,j}^{aug} = [1, 0, 1]$ indicates that the first and third VNF can reduce their processing time with additional CPU cores. The number of additional CPU cores allocated to VNF $v_{i,j}^k$ for boosting is denoted as $\sigma_{i,j}^k$.

When a SFC request is initiated, the edge operator needs to decide whether to accept this request. If yes, the SFC routing path and the VNF placement plan will be generated. Otherwise, the request will be discarded. Then the VNF instances are deployed and activated on the selected computation nodes according to the plan, and the bandwidth of virtual links along the SFC path are also reserved. During the lifetime of SFC, application traffic will arrive at the source AP node, receive service from the VNFs along the SFC path, and depart the edge computing network at a destination AP node. When the SFC lifetime expires, all the computation and network resources allocated to the SFC will be freed. All admission and placement decisions of SFC requests are assumed to be made by a centralized decision agent.

C. Problem Formulation

Given a set of SFC requests, the admission and placement decisions should be made. The Boolean decision variables used are given as follows:

$$x_{i,j} = \begin{cases} 1, & \text{if } s_{i,j} \text{ is accepted} \\ 0, & \text{otherwise.} \end{cases} \quad (3)$$

$$y_{i,j}^{k,n} = \begin{cases} 1, & \text{if } v_{i,j}^k \text{ is deployed on node } n \in N_C \\ 0, & \text{otherwise.} \end{cases} \quad (4)$$

$$z_{i,j}^e = \begin{cases} 1, & \text{if } e \in E \text{ is used by } s_{i,j} \\ 0, & \text{otherwise.} \end{cases} \quad (5)$$

Here the variable in (3) decides whether to accept this request. If yes, then the variables in (4) and (5) decide the

VNF placement locations and path selection, respectively. These decision variables need to guarantee that the following constraints will be met during the operating lifetime of the edge computing network.

The bandwidth constraint of links is denoted by (6) and (7). The existence function (6) requires the bandwidth can only be occupied during the lifetime of the SFC. (7) requires the total bandwidth workload of all links cannot exceed their capacities at any time.

$$b_{i,j}(t) = \begin{cases} b_{i,j}, & \text{if } t \in [T_{i,j}^\alpha, T_{i,j}^\beta] \\ 0, & \text{otherwise} \end{cases} \quad (6)$$

$$\sum_{i=1}^{|N_{AP}|} \sum_{j=1}^{|S_i|} x_{i,j} z_{i,j}^e b_{i,j}(t) \leq B^e, \forall e \in E \quad (7)$$

The computing capacity constraint of each computing node is denoted by (8) - (10). (8) requires that the CPU cores of the original VNF instance (including the additional CPU cores for boosting) and the CPU cores of its replicas should reside on the same computing node. The existence function (9) specifies that the CPU cores can only be occupied during the lifetime of the SFC. (10) indicates that the total CPU cores consumed by all VNFs in the node cannot exceed the total number of CPU cores installed on this node at any time.

$$c_{i,j}^{k,n} = y_{i,j}^{k,n} (c_{i,j}^k + \sigma_{i,j}^k + r_{i,j}^k) \quad (8)$$

$$c_{i,j}^n(t) = \begin{cases} \sum_{k=1}^{|V_{i,j}|} c_{i,j}^{k,n}, & \text{if } t \in [T_{i,j}^\alpha, T_{i,j}^\beta] \\ 0, & \text{otherwise} \end{cases} \quad (9)$$

$$\sum_{i=1}^{|N_{AP}|} \sum_{j=1}^{|S_i|} x_{i,j} c_{i,j}^n(t) \leq C^n, \forall n \in N_C \quad (10)$$

Given a reliability bound $\Theta_{i,j}$ of $s_{i,j}$, Suppose the reliability of a VNF instance is θ , and let $r_{i,j}^k$ denote the number of replicas of the k -th VNF. Then the reliability constraint of this SFC is denoted as follows:

$$\prod_{k=1}^{|V_{i,j}|} [1 - (1 - \theta)^{1+r_{i,j}^k}] \geq \Theta_{i,j} \quad (11)$$

The end-to-end delay constraint of a SFC comprises transmission delay and processing delay. Given a total delay upper bound of $\Phi_{i,j}$, assume the SFC has $|V_{i,j}|$ VNFs and $|E_{i,j}|$ links, then the delay constraint is denoted as follows:

$$\sum_{e=1}^{|E_{i,j}|} d_T^e + \sum_{k=1}^{|V_{i,j}|} d_p^k \leq \Phi_{i,j}. \quad (12)$$

Here d_T^e denotes the transmission delay on link e , d_p^k denotes the processing delay of $v_{i,j}^k$, which can be further denoted as follows:

$$d_p^k = \frac{w_{i,j}^k}{(c_{i,j}^k + \sigma_{i,j}^k)\tau}. \quad (13)$$

The goal of this problem is to maximize the profit of edge service provider, where the objective function is given as follows:

$$\begin{aligned} \max P &= \sum_{i=1}^{|N_{AP}|} \sum_{j=1}^{|S_i|} P_{i,j} = \sum_{i=1}^{|N_{AP}|} \sum_{j=1}^{|S_i|} x_{i,j} b_{i,j} C_{i,j} T_{i,j}^{dur} \eta_{i,j} \\ \text{s.t. } &(7), (10) - (12). \end{aligned} \quad (14)$$

Here $C_{i,j} = \sum_{k=1}^{|V_{i,j}|} c_{i,j}^k$ is the total CPU consumption of $s_{i,j}$, and $\eta_{i,j}$ is the penalty factor for extra CPU consumption made by boosting and replica allocation.

$$\eta_{i,j} = \frac{C_{i,j}}{C_{i,j} + \sum_{k=1}^{|V_{i,j}|} r_{i,j}^k + \sigma_{i,j}^k} \leq 1 \quad (15)$$

As the formulation shows, the delay-aware and reliability-aware SFC placement problem is a Mixed Integer Non-Linear Problem (MINLP) which is hard and intractable. In [8], the SFC placement problem is reduced to Flexible Job-shop Scheduling Problem, which is NP-hard. Thus, our problem is NP-hard as well. In next section, we present our multi-agent RL-based SFC placement scheme to obtain a sub-optimal solution.

IV. PROPOSED SCHEME

A. Scheme Overview

In our scheme, we apply Reinforcement Learning (RL) framework to the SFC placement problem and develop concrete implementations of the environment and agent. Each interaction loop represents the decision for one SFC request. The environment is comprised of the edge computing network and the current SFC request. The state observation information includes the current network state and the SFC request features. The agent acts as the network operator and is implemented as a multi-agent system, where different agents collaborate in a cascading order and generate a collection of decisions. First, the path agent makes an admission and path selection decision. With the path selection result and the SFC request features, the VNF configuration agent allocates concrete CPU cores for each VNF of the SFC. Finally, the pattern agent generates a pattern decision, also known as the VNF placement plan. The action comprises all the decisions made by the multi-agent system. The edge network deploys the SFC according to the action and then updates the current network state. The reward for serving this SFC is generated and sent to the multi-agent system. The multi-agent system updates the policy on each agent based on the reward.

For the path agent and the pattern agent, we adopt Deep Neural Networks (DNNs). For the VNF configuration agent, we utilize a heuristic algorithm, since this agent only needs to determine the number of CPU cores allocated to each VNF while satisfying all the constraints. In sections IV-B and IV-C, we present the detailed design of the environment and

step. After each action, a state transition experience $e_t = (s_t, a_t, r_t, s_{t+1})$ can be obtained, and the Q-value can be updated as $Q(s_t, a_t) \leftarrow Q(s_t, a_t) + \alpha(y_t - Q(s_t, a_t))$, in which $y_t = r_{t+1} + \gamma \max_{a_{t+1}} Q(s_{t+1}, a_{t+1})$, and α is the learning rate. y_t is the target and should be equal to $Q(s_t, a_t)$ if the learning process converges. DQN does not calculate Q-values explicitly, but uses a DNN to approximate the optimum Q-values: $Q^*(s, a) \approx Q(s, a; \theta)$. θ is the weight parameter function of the DNN.

To stabilize the learning performance, DQN introduces replay memory pooling, Eval-Net and Target-Net. Replay memory pool buffers the transition experiences and randomly takes samples from it for the learning. This random sampling prevents DQN from undergoing fluctuation due to learning from correlated experiences in sequences. The learning process of DQN updates not only $Q(s_t, a_t)$ but also the target value y_t , since y_t involves the estimate of the Q-value. The Eval-Net learns for each experience, and the Target-Net calculates the target value y_t . The weight function θ_T of Target-Net is copied from the weight function θ of Eval-Net periodically.

In our multi-agent RL scheme, the path agent and the pattern agents use DQN to improve their decision performance. They maintain their own replay memory pools and update their own DNN parameters asynchronously. For each SFC request placement process, the path agent and one of the pattern agents that serves this request can accumulate one transition experience.

V. EXPERIMENT AND EVALUATION

A. Experiment Settings

The topology of edge computing networks used in simulation is shown in Fig. 3, it contains two source AP nodes, two destination AP nodes and ten computation nodes. Each computation node is equipped with 32 CPU cores. The bandwidth capacity allocated to each link in the topology is randomly selected from (10 GB/s, 15 GB/s, 20GB/s). The edge computing network generated from this topology operates 200 logical time slots. The SFC requests are generated following the a Poisson arrival process with parameter λ , the service duration time follows an exponential distribution with parameter μ . For the remaining features in the request tuple, the source and destination node are randomly selected from the AP nodes; the bandwidth requirement is randomly selected from (200 MB/s, 500 MB/s, 1GB/s); the basic CPU requirement of each VNF ranges is randomly generated within the range 1 to 4; the Boolean feature vectors $f_{i,j}^{rep}, f_{i,j}^{aug}$ are also randomly generated.

B. Baseline Algorithms

Our RL-based scheme is compared with a heuristic multi-agent system which adopts two heuristic algorithms for path and pattern selection. The path heuristic algorithm filters out those paths whose residual bandwidth cannot accommodate the SFC traffic and chooses the path with maximal residual CPU cores. The pattern heuristic algorithm finds the location

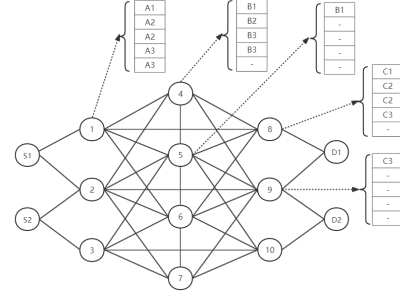


Fig. 3. Experiment Topology

of VNFs in their serving order along the selected path, and deploys each VNF on the first feasible node found whose residual CPU cores meet its requirement. After all the locations of VNFs are found, a pattern is obtained.

In our simulation, the multi-agent system has four implementations. Our proposed scheme uses a RL path agent and a set of RL pattern agents and is denoted as “RL + RL”; the pure heuristic scheme uses a heuristic path agent and a heuristic pattern agent and is denoted as “H + H”. We also evaluate the mixture implementations. The combination of a RL path agent and a heuristic pattern is denoted as “RL + H”, and the combination of a heuristic path agent and a set of RL pattern agents is denoted as “H + RL”.

C. Reinforcement Learning Settings

For Target-Net and Eval-Net of DQN, we implement 5 fully-connected layers, and each layer contains 256 hidden neurons. The activation function is $\tanh$. The initial learning rates is 0.001. The discount factor γ is set within the range of [0,1, 1] with interval of 0.1 to see its performance on total rewards. Instead of updating model parameters every step, we update parameters every 5 steps. To avoid the lack of data at the beginning of training, we collect 2000 pieces of transition experiences for each RL agent before learning. The reward for each deployed SFC is computed following the definition in (14), and the reward for a rejected request is 0. We set the RL algorithm to run for 700 episodes. In each episode, the multi-agent RL system gives placement decisions for all SFC requests arriving in the logical simulation time of the edge computing network.

D. Performance Results

We compare our proposed scheme with three baseline schemes as shown in Fig. 4. The performance of our multi-agent RL scheme converges when the training passes around 600 episodes, and surpasses the pure heuristic scheme “H+H” by at least 12%. The mixture implementation “RL+H” also performs better than the pure heuristic solution, but the advantage is less than 5%. The mixture implementation “H+RL” performs almost the same as the pure heuristic solution. From the result, we conclude that the collaboration of RL agents can achieve the best performance among all implementations.

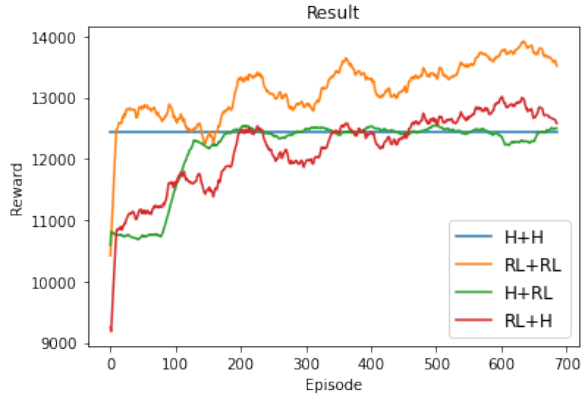


Fig. 4. Performance Comparison

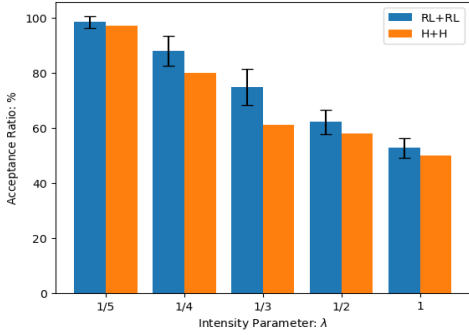


Fig. 5. Influence of Arrival Intensity

In order to explore the performance of our scheme in terms of acceptance ratio with different arrival intensities, we vary λ as the intensity parameter. The result is depicted in Fig. 5. When λ is close to 1, both our scheme and the heuristic solution cannot accommodate as many requests, and the acceptance ratio is around 50%. When λ is equal or smaller than $1/5$, the arrival intensity is low enough and both schemes can successfully accept most requests. When the λ is equals to $1/3$, our scheme achieves the highest acceptance ratio advantage over the heuristic solution.

We also evaluate the influence of discount factor γ on the total reward. The result is shown in Fig. 6. When γ equals to 0, the RL algorithm will reduce to a algorithm with an exploitation strategy and focus on immediate rewards. Our scheme can achieve optimal performance when γ equals to 0.5. If γ continues growing and approaches 1, the future reward will gain dominant influence on the current decision, the variance of total reward will increase, and the performance will deteriorate.

VI. CONCLUSION

In this paper, we formulate the edge SFC placement problem with multiple constraints. We propose a multi-agent reinforcement learning scheme to address this problem with latency and reliability considerations. The agents in the proposed scheme collaborate to make SFC placement decisions, including route

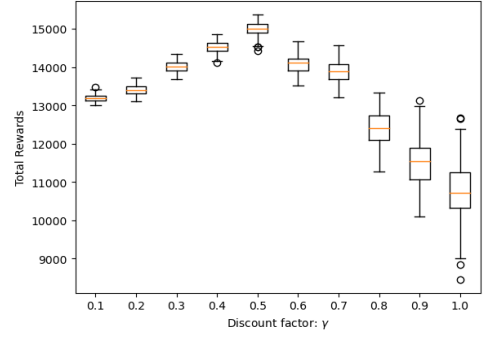


Fig. 6. Performance Comparison on Discount Factor

path selection, VNF configuration and VNF placement. The experiment results show that our scheme outperforms the heuristic solution in terms of acceptance ratio and total reward.

In our current work, we limit the computing node number m of the path and the VNF number n of a SFC to a small range. The purpose is to use a dedicated RL agent to train the selection policy for every (m, n) combination. In the future, we plan to use a grouping strategy to deal with the pattern selection problem for paths with more computing nodes and SFCs with more VNFs.

VII. ACKNOWLEDGMENT

This work was supported in part by the National Science Foundation under Grant No. CNS-2008856.

REFERENCES

- [1] Y. Mao, C. You, J. Zhang, K. Huang, and K. B. Letaief, "A survey on mobile edge computing: The communication perspective," *IEEE Communications Surveys Tutorials*, vol. 19, no. 4, pp. 2322–2358, 2017.
- [2] K. Akahoshi, F. He, and E. Oki, "Service deployment model with virtual network function resizing," in *2021 IEEE Global Communications Conference (GLOBECOM)*, pp. 1–6, IEEE, 2021.
- [3] A. Alleg, T. Ahmed, M. Mosbah, R. Riggio, and R. Boutaba, "Delay-aware vnf placement and chaining based on a flexible resource allocation approach," in *2017 13th international conference on network and service management (CNSM)*, pp. 1–7, IEEE, 2017.
- [4] S. Pandey, J. W.-K. Hong, and J.-H. Yoo, "Q-learning based sfc deployment on edge computing environment," in *2020 21st Asia-Pacific Network Operations and Management Symposium (APNOMS)*, pp. 220–226, 2020.
- [5] J. Jia, L. Yang, and J. Cao, "Reliability-aware dynamic service chain scheduling in 5g networks based on reinforcement learning," in *IEEE INFOCOM 2021-IEEE Conference on Computer Communications*, pp. 1–10, IEEE, 2021.
- [6] M. A. Khoshkholghi, M. Gokan Khan, K. Alizadeh Noghani, J. Taheri, D. Bhamare, A. Kessler, Z. Xiang, S. Deng, and X. Yang, "Service function chain placement for joint cost and latency optimization," *Mobile Networks and Applications*, vol. 25, pp. 2191–2205, 2020.
- [7] X. Shang, Z. Liu, and Y. Yang, "Network congestion-aware online service function chain placement and load balancing," in *Proceedings of the 48th International Conference on Parallel Processing*, pp. 1–10, 2019.
- [8] J. F. Riera, E. Escalona, J. Batallé, E. Grasa, and J. A. García-Espín, "Virtual network function scheduling: Concept and challenges," in *2014 International Conference on Smart Communications in Network Technologies (SaCoNeT)*, pp. 1–5, 2014.
- [9] V. Mnih, K. Kavukcuoglu, D. Silver, A. Graves, I. Antonoglou, D. Wierstra, and M. Riedmiller, "Playing atari with deep reinforcement learning," *arXiv preprint arXiv:1312.5602*, 2013.