



Use X5R or X7R ceramic caps in HV section

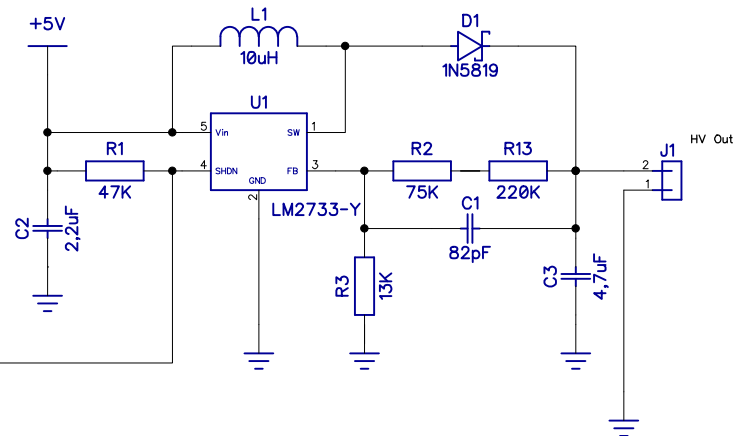

Use low ESR types for C4 & C5

R8 & R11 have to be about 5 times the hot resistance of the filament
R7 & R10 value sets the filament voltage

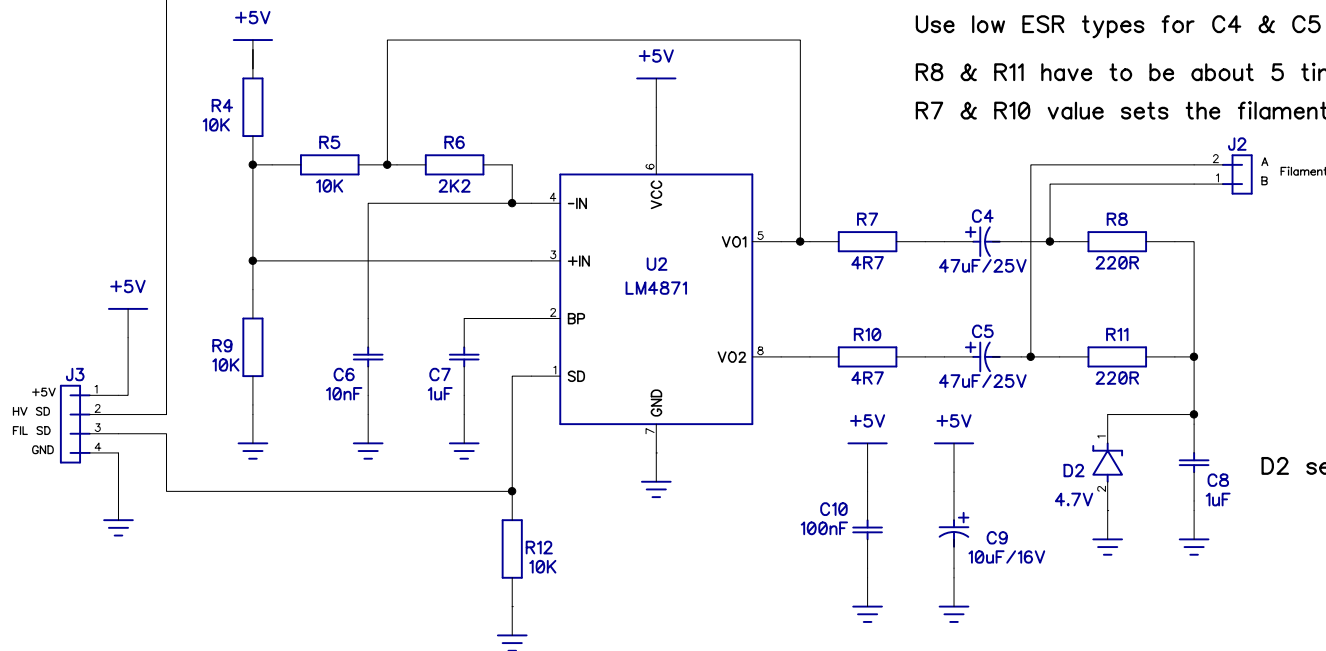

D2 sets the virtual center tap voltage

VFD PSU Filament & HV		
Size	Number	Rev
A4	z:\DipTrace\Projects\VFD_PSU	V2.1
Date	27-4-2019	Roland Kamp
Filename	vfd_psu_v2.dch	Sheet 1 of 1