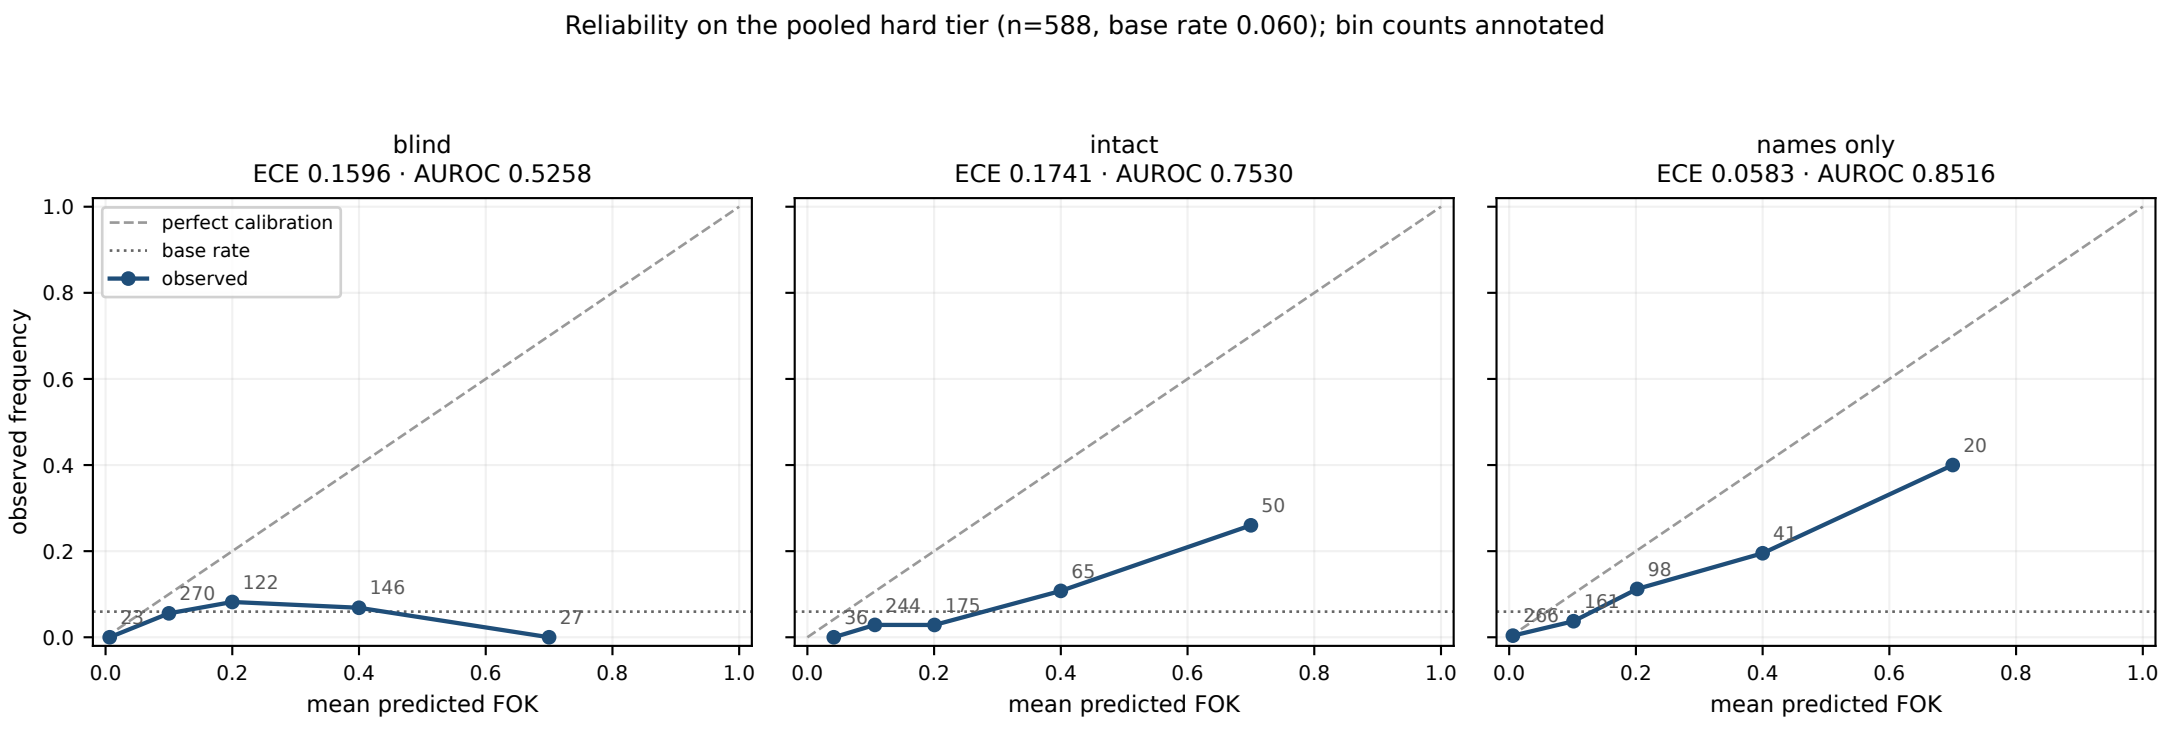
Reliability on the pooled hard tier (n=588, base rate 0.060); bin counts annotated
blind
ECE 0.1596 · AUROC 0.5258
intact
ECE 0.1741 · AUROC 0.7530
names only
ECE 0.0583 · AUROC 0.8516
perfect calibration
base rate
observed
observed frequency
mean predicted FOK
23
270
122
146
27
36
244
175
65
50
266
161
98
41
20