

## — Applications



**Woven Sacks**



**Woven Fabric**

## — Specifications

| MODEL                            | VEGA 6                   | VEGA 6 HS                | VEGA Star                |
|----------------------------------|--------------------------|--------------------------|--------------------------|
| Working Width - Double Flat      | 30 to 90 cm              | 30 to 90 cm              | 30 to 84 cm              |
| No. of Shuttles/Loom             | 6                        | 6                        | 6                        |
| Weft Insertion Rate              | 1000 ppm*                | 1100 ppm*                | 1200 ppm*                |
| Warp/Weft Core Internal Diameter | 35 mm**                  | 35 mm**                  | 35 mm**                  |
| Warp/Weft Core Length            | 218 mm**                 | 218 mm**                 | 218 mm**                 |
| Warp Bobbin Diameter (max.)      | 130 mm**                 | 130 mm**                 | 130 mm**                 |
| Weft Bobbin Diameter (max.)      | 115 mm                   | 115 mm                   | 115 mm                   |
| <b>No. of Tapes</b>              | <b>576 / 720</b>         | <b>576 / 720</b>         | <b>588 / 672</b>         |
| Winding Roll Diameter            | 1500 mm                  | 1500 mm                  | 1200 mm                  |
| Dimension (L/W/H) (meter)        | 576 - 9.12 / 2.79 / 3.03 | 576 - 9.12 / 2.79 / 3.03 | 588 - 9.40 / 2.79 / 3.03 |
| Dimension (L/W/H) (meter)        | 720 - 9.68 / 2.79 / 3.03 | 720 - 9.68 / 2.79 / 3.03 | 672 - 9.68 / 2.79 / 3.03 |

| MODEL                            | JAICO 608 LF        | VEGA 608 LF/HF      | VEGA 609 LF/HF      |
|----------------------------------|---------------------|---------------------|---------------------|
| Working Width - Double Flat      | 80 to 120 cm        | 80 to 130 cm        | 85 to 140 cm        |
| No. of Shuttles/Loom             | 6                   | 6                   | 6                   |
| Weft Insertion Rate              | 780 ppm*            | 860 ppm*            | 680 ppm*            |
| Warp/Weft Core Internal Diameter | 35 mm**             | 35 mm**             | 35 mm**             |
| Warp/Weft Core Length            | 218 mm**            | 218 mm**            | 218 mm**            |
| Warp Bobbin Diameter (max.)      | 130 mm**            | 130 mm**            | 130 mm**            |
| Weft Bobbin Diameter (max.)      | 115 mm              | 115 mm              | 115 mm              |
| <b>No. of Tapes</b>              | <b>1080</b>         | <b>1008 / 1176</b>  | <b>1296 / 1440</b>  |
| Winding Roll Diameter            | 1200 mm             | 1200 mm             | 1200 mm             |
| Dimension (L/W/H) (meter) LF     | 12.94 / 3.11 / 3.84 | 12.91 / 3.11 / 3.84 | 11.31 / 3.40 / 4.18 |
| Dimension (L/W/H) (meter) HF     | -                   | 13.57 / 3.11 / 3.84 | 12.57 / 3.40 / 4.18 |

LF version for light fabric and HF version for heavy fabric

\* Actual processing speed depends on fabric size, construction, tape specifications and quality of tape.

\*\* Special versions on request.

Specifications are subject to change without prior notice, due to continuous developments. These Details are Indicative and not binding.

Extreme values indicated are not achievable simultaneously.

The picture may show optional equipment's that are not part of the standard supply. For details, refer to the quotation.



### WORKS

1701, G.I.D.C. Industrial Estate, Ankleshwar - 393 002, Dist. Bharuch, Gujarat, India.

**MUMBAI**  
+91 9769649949  
mumbai@jpel.in

**AHMEDABAD**  
+91 9924823700  
marketing@jpel.in

**DELHI**  
+91 7203034171  
delhi@jpel.in

**INDORE**  
+91 9826915344  
indore@jpel.in

**KOLKATA**  
+91 9830170833  
kolkata@jpel.in

**SOUTH INDIA**  
+91 9620678479  
south@jpel.in

**OVERSEAS-RUSSIA**  
+7 9267178402  
vit@avk-polymer.ru

**OVERSEAS-MENA**  
+971 55 799 2288  
mena@jpel.in



**JP GROUP**

# CIRCULAR LOOMS

## 6 SHUTTLE CIRCULAR LOOM

J P EXTRUSIONTECH  
PVT. LTD.


[www.jpel.in](http://www.jpel.in)

6 - Shuttle Circular Loom





# 6 SHUTTLE CIRCULAR LOOM

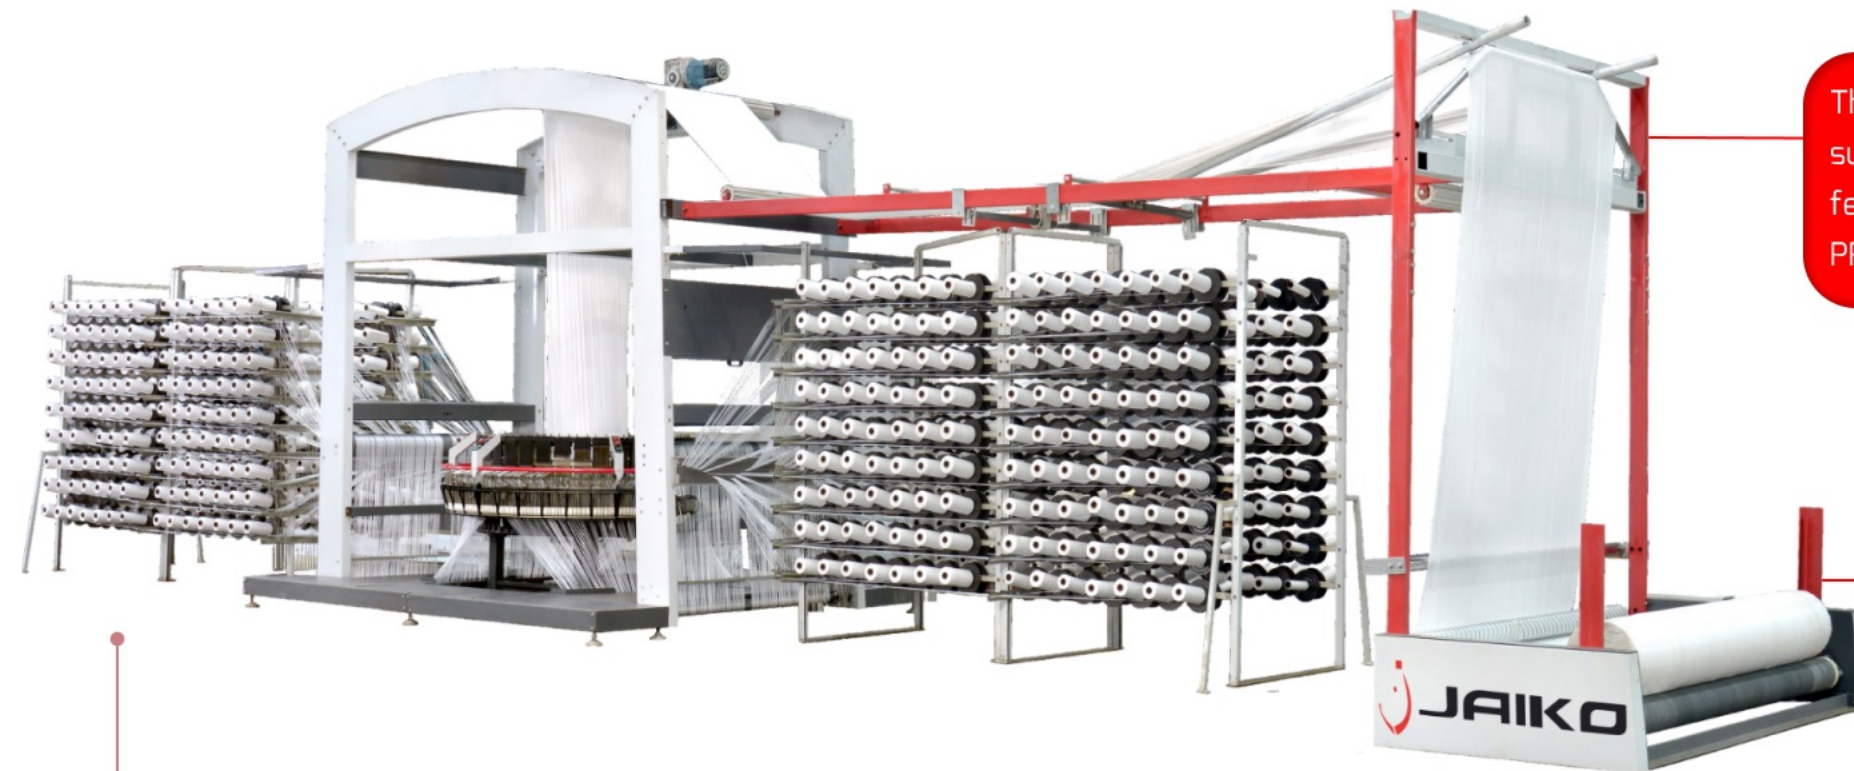

JAIKO 609 LF/HF

The **LF version** is designed for lighter fabrics, and is used in packaging applications such as sugar bags, food & grain bags, cement bags, mineral & chemical bags, fertilizer bags, as well as bale wrapping and packing husk or cattle feed packaging in PP or paper-coated bags.

The **HF version** is designed for heavier fabrics, perfect for jumbo bags (FIBCS), tarpaulins and geotextile applications, ensuring durability and strength for demanding industrial needs.

Designed for high-speed performance, the **6-Shuttle Loom** features a working **Width Ranging from 30 cm to 140 cm\*** and a **Weft Insertion Rate of up to 1200 ppm\*** (\*depending on the selected model). It offers flexibility to weave both Lightweight fabric (LF) and Heavyweight fabric (HF) with precision and consistency.

## — Features



### DOUBLE DECK WINDER:

The Double Deck Winder is a space-efficient solution designed for winding separate layers of slitted fabric on both sides. It features a compact double-deck mounting system, specifically tailored for standard-width fabric surface winders.



### INFEED SYSTEM:

A motor with a suitable gearbox reduction assembly which provides the smooth flow with appropriate tension of wrap tape through load cell tension control system.



### HMI:

PLC based control system for easy operation of machine which shows various machine data like shift production, breakages and machine statistics. Various operational parameters can be adjusted easily.