

— Applications



Tarpaulin



FIBC Bags



Geo-Textile

— Specifications

MODEL	JAIKO 810 LF/HF	JAIKO 811 LF/HF	JAIKO 812 LF/HF	JAIKO 814 LF/HF
Working Width - Double Flat	100 to 160 cm	120 to 170 cm	150 to 200 cm	175 to 225 cm
No. of Shuttles/Loom	8	8	8	8
Weft Insertion Rate (max.)	700 ppm*	650 ppm*	650 ppm*	740 / 650 ppm*
Warp/Weft Core Internal Diameter	35 mm**	35 mm**	35 mm**	35 mm**
Warp/Weft Core Length	218 mm**	218 mm**	218 mm**	218 mm**
Warp Bobbin Diameter (max.)	130 mm**	130 mm**	130 mm**	130 mm**
Weft Bobbin Diameter (max.)	115 mm	115 mm	115 mm	115 mm
No. of Tapes (LF/HF)	1344 / 1728	1440 / 1920	1568 / 2240	1680 / 2400
Winding Roll Diameter	1200 mm	1200 mm	1200 mm	1200 mm
Dimension (L/W/H) (meter) LF	11.79 / 3.35 / 4.18	12.67 / 3.38 / 4.44	13.33 / 3.74 / 4.66	14.46 / 3.97 / 4.65
Dimension (L/W/H) (meter) HF	12.77 / 3.35 / 4.18	14.49 / 3.58 / 4.44	15.59 / 3.74 / 4.66	16.33 / 3.97 / 4.65

MODEL	JAIKO 1014 LF/HF	JAIKO 1016 LF/HF	VEGA 1218 LF/HF
Working Width - Double Flat	175 to 225 cm	225 to 255 cm	250 to 295 cm
No. of Shuttles/Loom	10	10	12
Weft Insertion Rate (max.)	700 ppm*	625 ppm*	650 ppm*
Warp/Weft Core Internal Diameter	35 mm**	35 mm**	35 mm**
Warp/Weft Core Length	218 mm**	218 mm**	218 mm**
Warp Bobbin Diameter (max.)	130 mm**	130 mm**	130 mm**
Weft Bobbin Diameter (max.)	115 mm	115 mm	115 mm
No. of Tapes (LF/HF)	1680 / 2400	1920 / 2560	2016 / 2880
Winding Roll Diameter	1200 mm	1200 mm	1200 mm
Dimension (L/W/H) (meter) LF	14.46 / 3.97 / 4.65	15.93 / 4.39 / 4.89	15.50 / 4.79 / 5.50
Dimension (L/W/H) (meter) HF	16.33 / 3.97 / 4.65	16.77 / 4.39 / 4.89	17.45 / 4.79 / 5.50

LF version for light fabric and HF version for heavy fabric

* Actual processing speed depends on fabric size, construction, tape specifications and quality of tape.

** Special versions on request.

Specifications are subject to change without prior notice, due to continuous developments. These Details are Indicative and not binding.

Extreme values indicated are not achievable simultaneously.

The picture may show optional equipment's that are not part of the standard supply. For details, refer to the quotation.



WORKS

1701, G.I.D.C. Industrial Estate, Ankleshwar – 393 002, Dist. Bharuch, Gujarat, India.

MUMBAI
+91 9769649949
mumbai@jpel.in

AHMEDABAD
+91 9924823700
marketing@jpel.in

DELHI
+91 7203034171
delhi@jpel.in

INDORE
+91 9826915344
indore@jpel.in

KOLKATA
+91 9830170833
kolkata@jpel.in

SOUTH INDIA
+91 9620678479
south@jpel.in

OVERSEAS-RUSSIA
+7 9267178402
vit@avk-polymer.ru

OVERSEAS-MENA
+971 55 799 2288
mena@jpel.in



JP GROUP

CIRCULAR LOOMS


8, 10 & 12 SHUTTLE CIRCULAR LOOM

J P EXTRUSIONTECH
PVT. LTD.

www.jpel.in

8, 10 & 12 - Shuttle Circular Loom

8, 10 & 12 SHUTTLE CIRCULAR LOOM

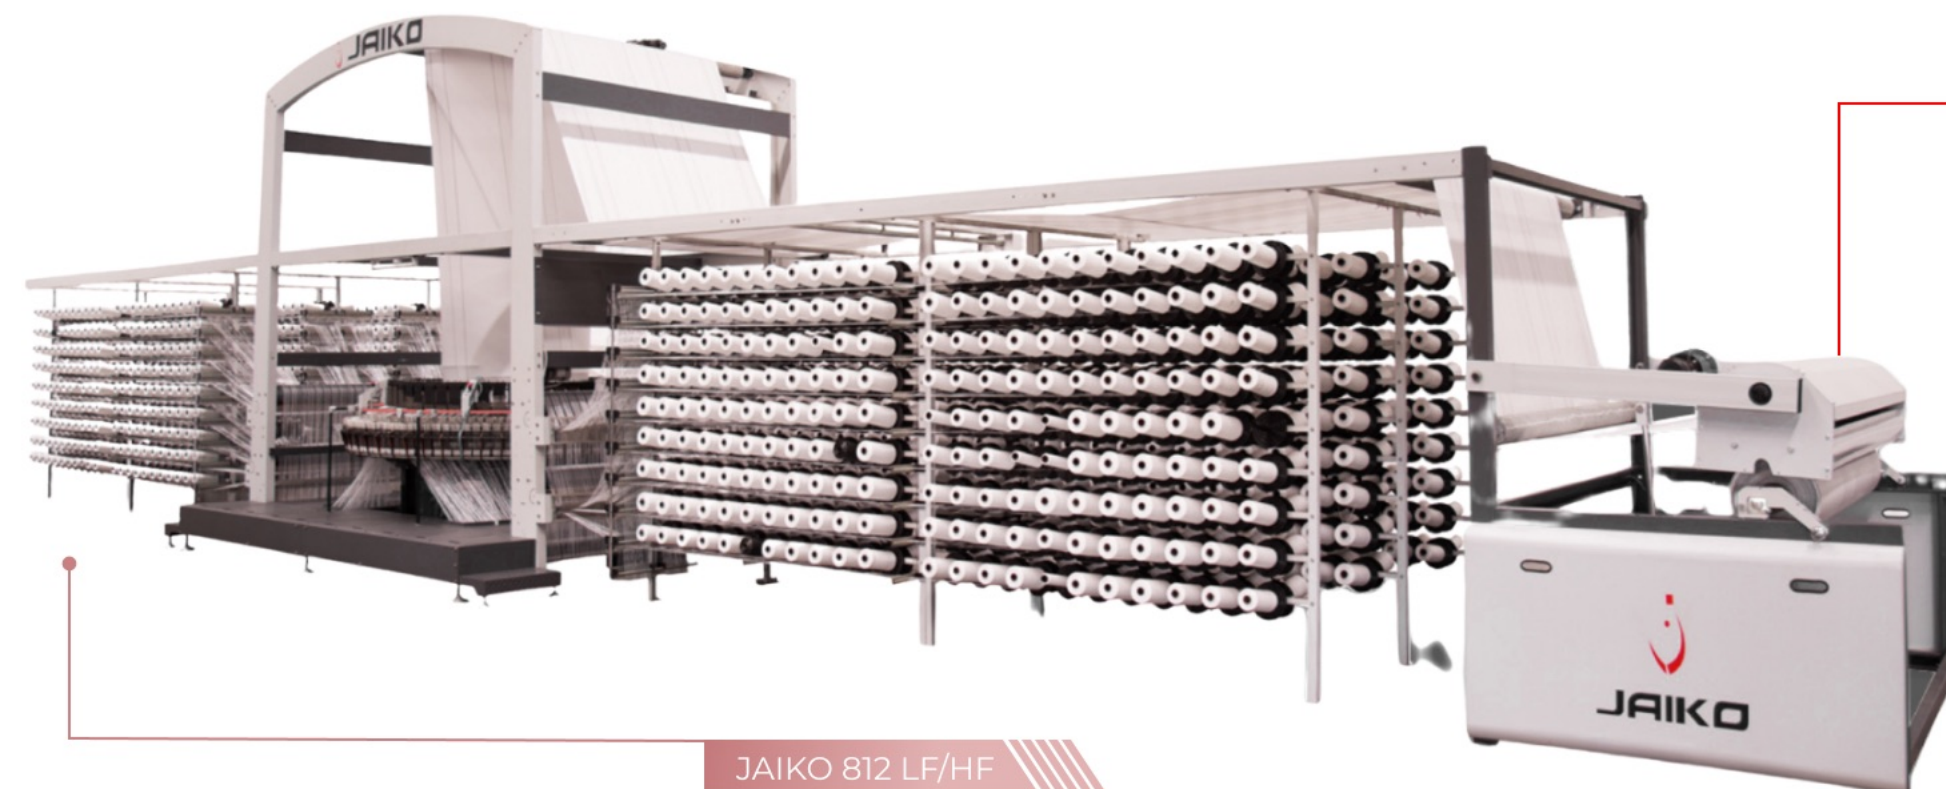

JAIKO 812 LF/HF

A magazine winder is an inverted winder design where the surface roll is positioned above the winding shaft. This configuration applies optimal pressure on the winding roll, ensuring precise tension control and superior winding quality, making it ideal for heavy denier fabrics and FIBC (Flexible Intermediate Bulk Container) applications.

Infeed System a motor with a suitable gearbox reduction assembly which provides the smooth flow with appropriate tension of warp tape through load cell tension control system.



Advanced shuttle Looms available in 8, 10, and 12 configurations, designed to deliver exceptional weaving capability for both light and heavy fabrics. With a robust structure and precise engineering, these machines support **Working Widths from 100 cm to 295 cm*** and **Weft Insertion Rate of up to 740 ppm*** (*depending on the selected model).

— ADDITIONAL EQUIPMENTS

- Gusseting Device
- Fabric Slitting (Thermal/ Ultrasonic)
- Loom Data Monitoring System
- Infeed Tension Control System
- Additional Fabric Winder (Standard/ Wide Width)
- Warp Reinforcement Compensation

