


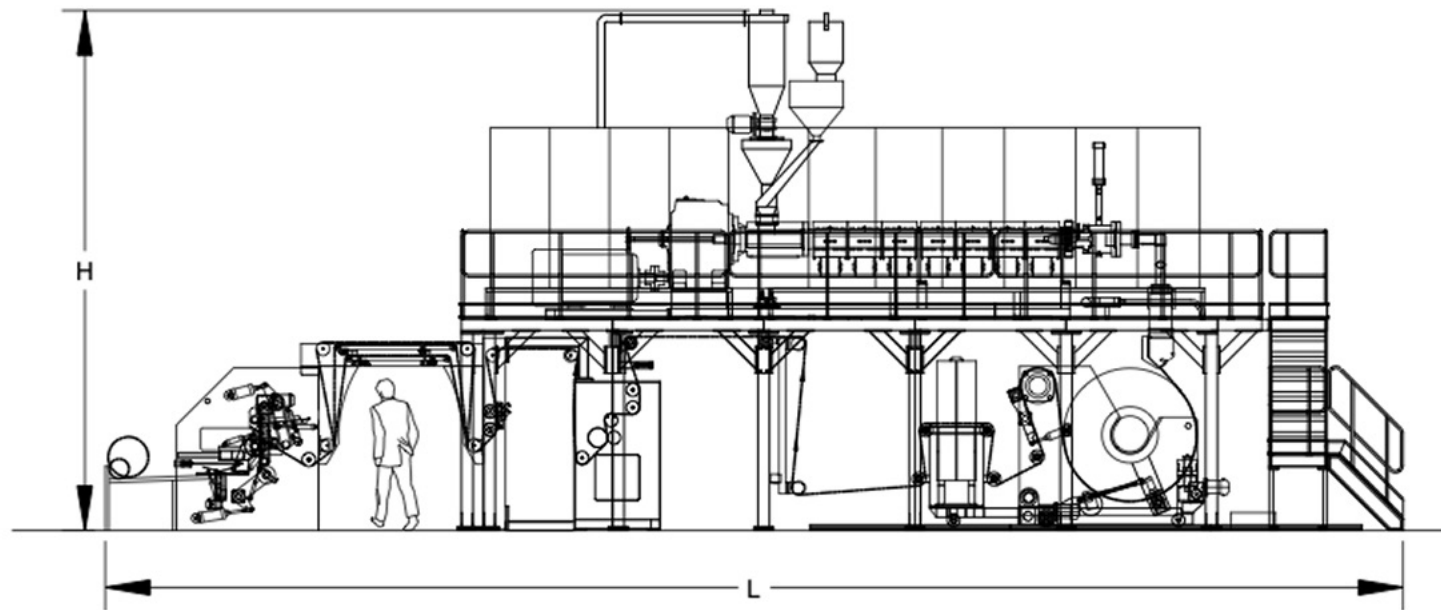

— Specifications

Model	Screw Dia (mm)	L/D Ratio	Die Size	Finish Film Width	Output (Kgs/Hr.)
JP-COEX-CF 1800 (Three Layer)	70 100 70	30 : 1	1800 mm	1500 mm	285 to 400
JP-COEX-CF 2300 (Three Layer)	70 100 80	30 : 1	2300 mm	2000 mm	380 to 500
JP-COEX-CF 2300 (Three Layer)	80 120 70	30 : 1	2300 mm	2000 mm	600 to 650
JP-COEX-CF 3300 (Three Layer)	80 120 80	30 : 1	3300 mm	3300 mm	570 to 745
JP-COEX-CF 2300 (Five Layer)	80 120 100 80	30 : 1	2300 mm	2300 mm	900 to 1000

*Specifications are subject to change without prior notice, due to continuous developments. These Details are Indicative and not binding. Please refer quotation for technical details and scope of supply.

WORKS

1701, G.I.D.C. Industrial Estate, Ankleshwar – 393 002, Dist. Bharuch, Gujarat, India.

MUMBAI
+91 9769649949
mumbai@jpel.in

AHMEDABAD
+91 9924823700
marketing@jpel.in

DELHI
+91 7203034171
delhi@jpel.in

INDORE
+91 9826915344
indore@jpel.in

KOLKATA
+91 9830170833
kolkata@jpel.in

SOUTH INDIA
+91 9620678479
south@jpel.in

OVERSEAS-RUSSIA
+7 9267178402
vit@avk-polymer.ru

OVERSEAS-MENA
+971 55 799 2288
mena@jpel.in

CAST FILM LINE

JP COEX-CF 1800 | 2300 | 3300



J P EXTRUSIONTECH
PVT. LTD.

www.jpel.in



High-performance chill roll cast film lines ideal for producing multi-ply films used in stretch film, cling film, CPP film, barrier film, masking film, and blister packaging. These systems ensure uniform film thickness and high-speed operation.

— Applications

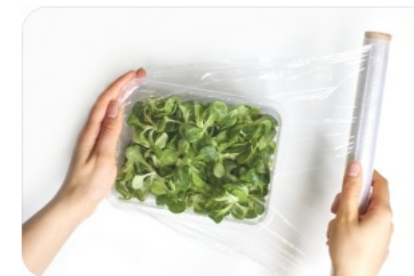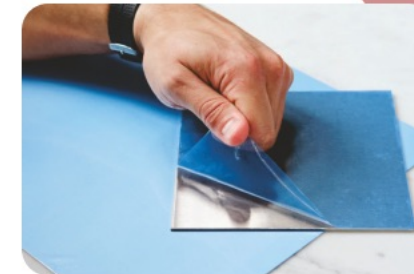

- Stretch Films: Wrapping Palletized Goods.
- Cling Films: Food Packaging for Freshness.
- Barrier Films: Protection from Moisture and Gases.
- Masking Films: Shielding During Painting.