


BAG CONVERSION LINE

BAG CONVERSION LINE WITH TWIST GUSSET

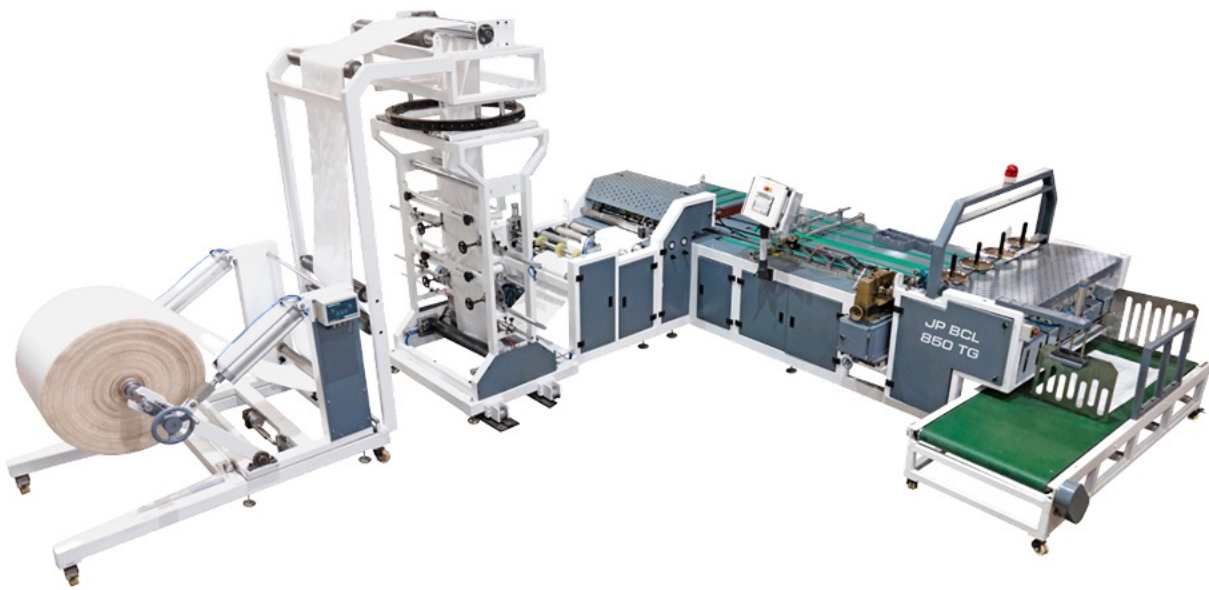

– Features

- The machine is designed to add a twist gusset fold and cut woven fabric (**PP/HDPE/ BOPP**) to the required bag length, improving bag shape and utility.
- This type of machine can typically produce around **30 – 40 bags per minute** (depending on material and size) for efficient, high-volume output.

MODEL	JPBCL 850TG
Diameter of Unwinder Cloth (Max)	1400 mm
Width of Unwinder Cloth (Max)	300 mm to 850 mm
Cutting Length	500 to 1400 mm **
Cutting Length Accuracy	± 1 mm
Production Speed	Up to 40 Bags/min**
Internal Diameter of Core	3"
Bottom Folding Width	20-30 mm**
Gusseting Depth	50 to 90 mm
Gusseting Width (Before Gusseting)	430 mm to 685 mm (with Gusseting mode)
Stitching Type	Single & Double Stitch

* Depends on Type/Material of liner
** Depends on width , length, type of Fabric, Quality of Fabric & winding, etc.
Specifications are subject to change without prior notice due to continuous developments. The details are indicative and not binding.
Extreme values indicated are not achievable simultaneously.
The picture may show optional equipment that are not part of the standard supply. For details, refer to the quotation.



TWIST GUSSETING & WINDING MACHINE



– Features

- The machine adds twist gussets (folded pleats) to both sides of **BOPP woven fabric rolls**, improving bag strength and shape for industrial bags.
- Built for high-speed processing and smooth roll handling, the machine streamlines gusseting and cutting operations, increases production time by reducing manual labor.

MODEL	JPTWG - R
Unwinding Width x Dia (Max)	430 mm to 685 mm x 1200 mm
Gusseting Depth (Max)	50 mm to 90 mm**
Fabric Width (Before Gusseting)	430 mm to 685 mm
Fabric Width (After Gusseting)	330 mm to 585 mm
Production of Twisting Gusseted Bag	80 MPM Maximum**
Production of Plain Bag	80 MPM Maximum**

* Depends on Type/Material of liner
** Depends on width , length, type of Fabric, Quality of Fabric & winding, etc.
Specifications are subject to change without prior notice due to continuous developments. The details are indicative and not binding.
Extreme values indicated are not achievable simultaneously.
The picture may show optional equipment that are not part of the standard supply. For details, refer to the quotation.

WORKS
1701, G.I.D.C. Industrial Estate, Ankleshwar – 393 002, Dist. Bharuch, Gujarat, India.




BAG CONVERSION LINE

J P EXTRUSIONTECH
LIMITED
www.jpel.in

BAG CONVERSION LINE

JPBCL - 850

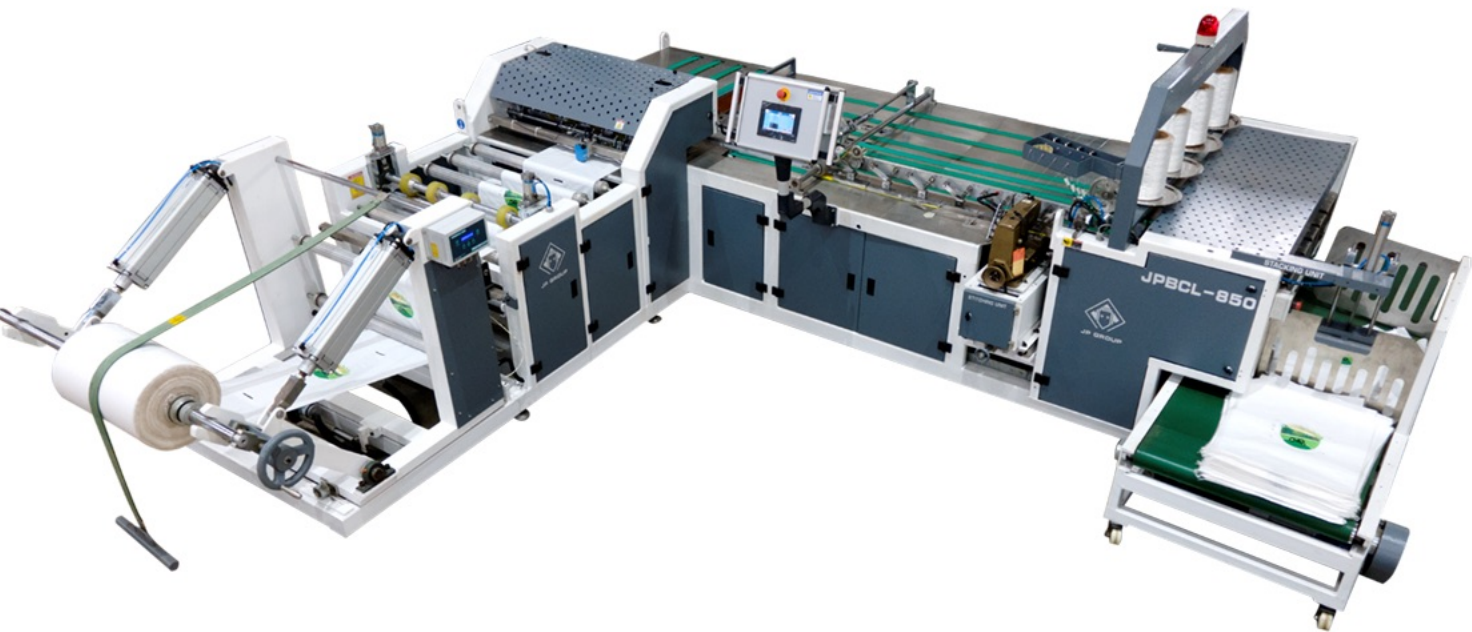


– Features

- Efficient Volume Reduction: This machine automatically cuts woven fabric rolls and stitches them into bags **(PP or HDPE bags)**, eliminating manual processes.
- It is designed for high-speed output, capable of producing **up to ~40 bags per minute**, improving efficiency and productivity.


MODEL	JPBCL 850	JPBCL 1250	JPBCL 1600
Diameter of Unwinding Cloth	1400 mm	1300 mm	1200 mm
Width of unwinder cloth	300 to 850 mm	300 to 1250 mm	500 to 1600 mm
Cutting Length	500 to 1400 mm	500 to 1550 mm	500 to 1850 mm
Cutting Length Accuracy	±1 mm	±1 mm	±1 mm
Production Speed (upto)*	40 Bags/Min*	40 Bags/Min*	30 Bags/Min*
Internal Diameter of Core	3"	3"	3"
Bottom Folding Width	20 - 30 mm	20 - 30 mm	20 - 30 mm
Stitching Type	Single & Double Stitch		

* Depends on Type/Material of liner
** Depends on width , length, type of Fabric, Quality of Fabric & winding, etc.
Specifications are subject to change without prior notice due to continuous developments. The details are indicative and not binding.
Extreme values indicated are not achievable simultaneously.
The picture may show optional equipment that are not part of the standard supply. For details, refer to the quotation.


JPBCL - 1250

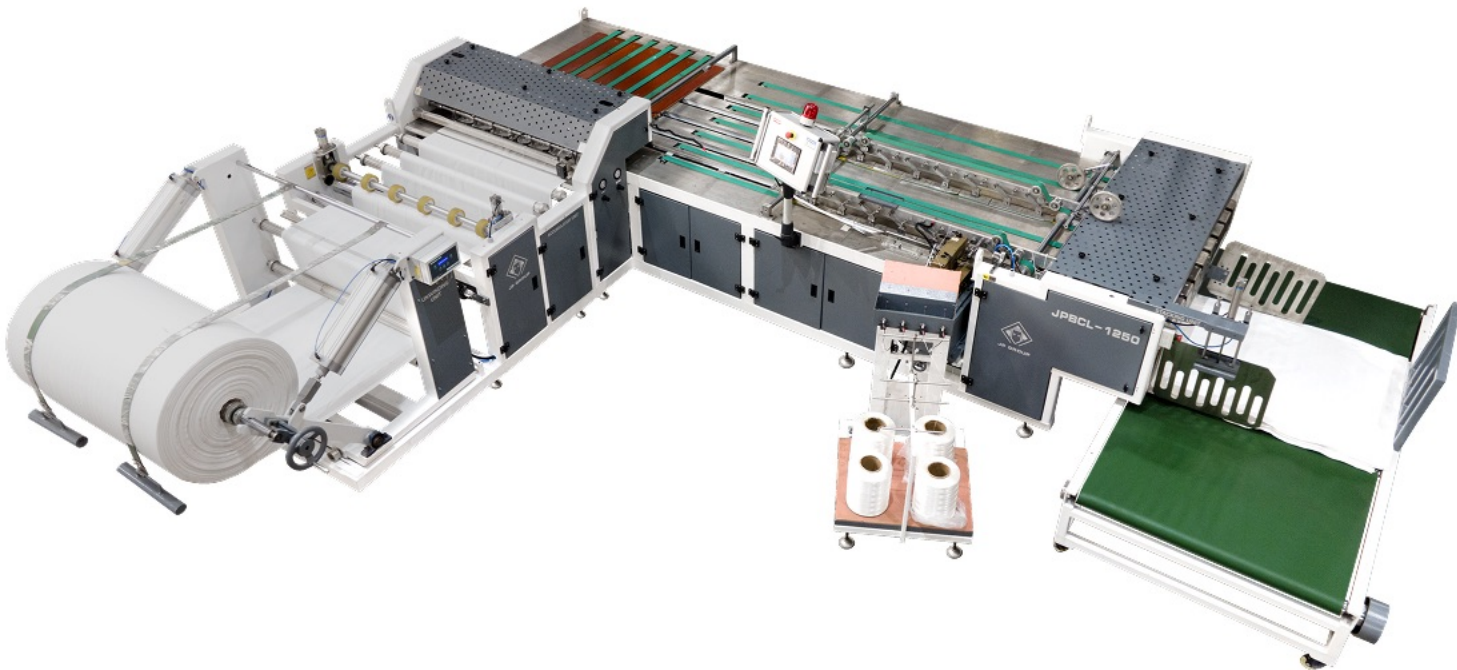

JPBCL 1600

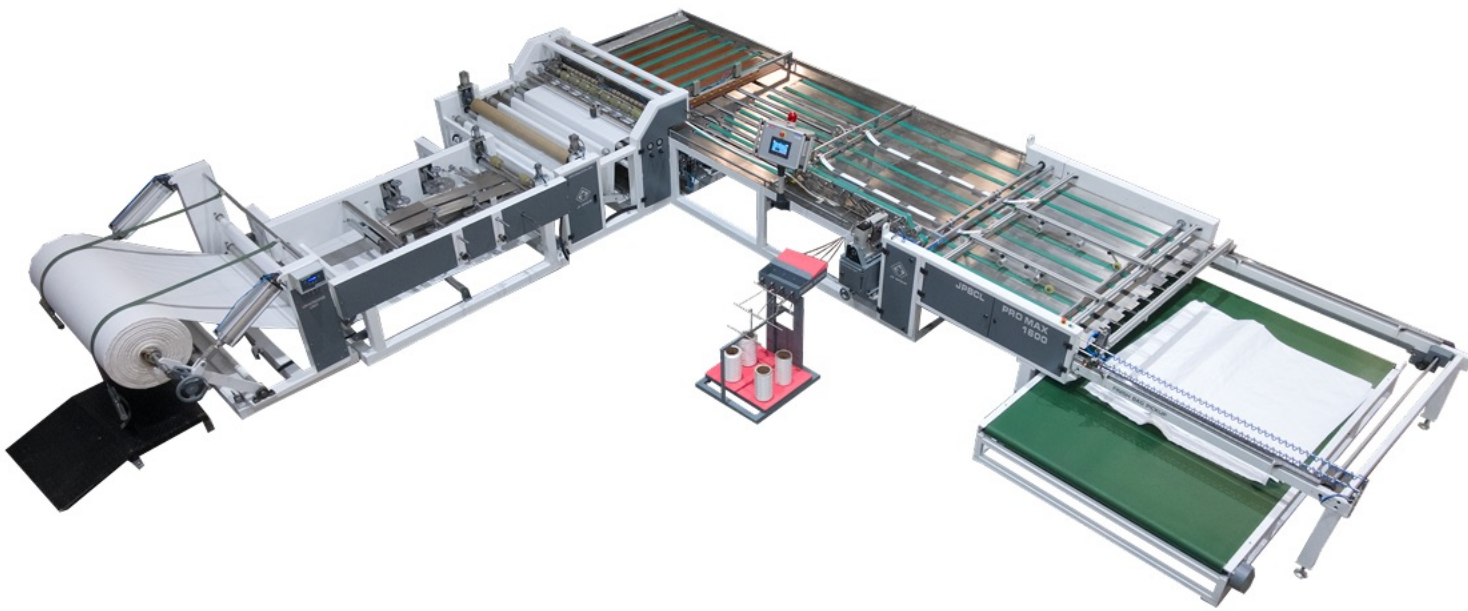

BAG CONVERSION LINE WITH LINER INSERTION

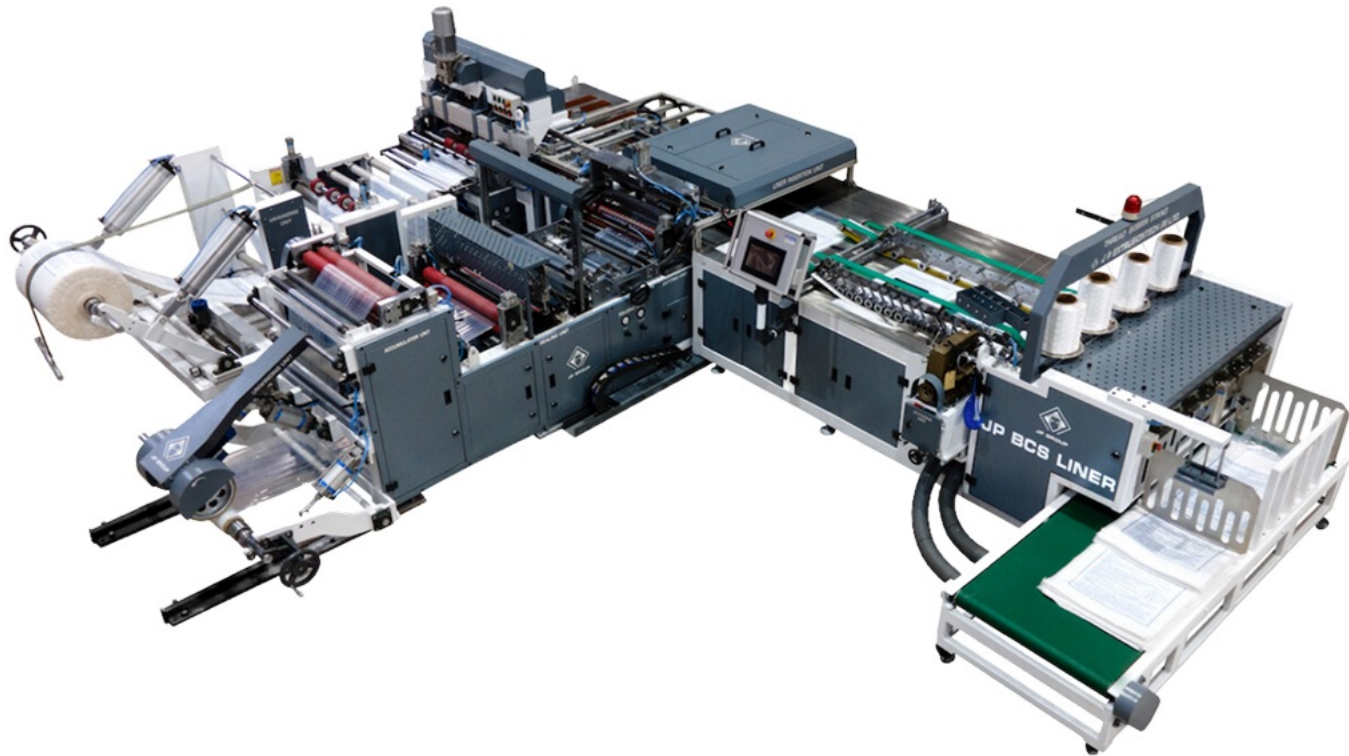

– Features

- This machine automatically inserts a liner **(PE/HDPE)** inside woven sacks during production, replacing manual liner placement and improving efficiency for packaging sensitive products (e.g., sugar, chemicals).
- Designed for industrial use, the machine can produce many bags per minute **(often up to ~30~35 bags/min *depending on model)**.

MODEL	JPBCL 850Li
Unwinder Fabric Roll Width During Liner Insertion (Max)	400 mm to 700 mm
Unwinder Fabric Roll Width During Bag Cutting and Stitching (Max)	400 mm to 850 mm
Unwinder Fabric Roll Dia (Max)	1250 mm
Unwinder Liner Roll Width (Max)	500 mm to 720 mm
Liner Thickness	20 to 100 micron
Liner Cutting Length (Max)	770 mm to 1225 mm (Liner Mode)
Fabric Cutting Length (Max)	650 mm to 1200 mm
Cutting Length Accuracy	+ - 2 mm
Folding Width	20 - 30 mm**
Stitching Type	Double Stitch
Production Speed (Bag per Minute)	25 to 30 Bags/Min.**(Liner Mode) Upto 35 Bags/Min.** (BCS Mode)
Working Air Pressure	8 bar

* Depends on Type/Material of liner
** Depends on width , length, type of Fabric, Quality of Fabric & winding, etc.
Specifications are subject to change without prior notice due to continuous developments. The details are indicative and not binding. Extreme values indicated are not achievable simultaneously. The picture may show optional equipment that are not part of the standard supply. For details, refer to the quotation.