

CONVERTING MACHINE

Baffle Cutting



— Features

- **Efficient Volume Reduction:** The bale press compacts FIBC jumbo bags, reducing storage space and transportation costs.
- **High-Pressure Compression:** Ensures uniform and dense bales, improving material handling and waste management.
- **Cost-Effective Solution:** Minimizes warehouse space usage and optimizes logistics for bulk materials.

— Specifications

- Automatic fabric cutting machine

MODEL	FIBCM 1500	FIBCM 2200
Fabric Width (Max.)	1500 mm	2200 mm
Roll Dia (Max.)	1200 mm	1200 mm
Fabric Length (Min. and Max.)	500 - 2000 mm	500 - 2000 mm
Line Speed Depends on quality of material and GSM of fabric and length	22 MPM Max.	22 MPM Max.
Total Connected Load	11 KW	11 KW

- Hydraulic Bale Press

MODEL	JP30BB	JP40BB	JP120BB
Capacity	30 Tons	40 Tons	120 Tons
Day Light Gap	1150 mm	1350 mm	1750 mm
Bed Size (mm)	1200 x 800	1500 x 1000	1100 x 950
Stroke Length of Cylinder	1000 mm	1200 mm	1600 mm
Close Height	-	150 mm	200 mm
Bale Pushing	Rear Cylinder of 100 cm of 10 Ton Capacity		
Oil Tank Capacity	120 Litres	250 Litres	350 Litres
Power (HP for AC Motor)	7.5	10	20
Operation	Electrical Controls with Interlocking		

- Belt Cutting

MODEL	JPBCM6
Material for Process	PP Webbing Belt
No. of Belt	6
Belt Width Max.	75 mm
Distance of 2 Marking Points	20 mm Minimum
Marking on Belt	Pneumatic Operated
Cutting Mechanism	Hot Blade - Pneumatic Operated

- Baffle Cutting

MODEL	BAFFLE CUTTING
Material for Process	HDPE/PP Laminated Fabric
Machine Capacity	20 Ton
Punching Capacity in Single Stroke	Upto 50 Sheet
Fabric Width (Max.)	Upto 100 GSM

* Actual processing speed depends on fabric size, construction, tape specifications and quality of tape.
** Special versions on request.
Specifications are subject to change without prior notice, due to continuous developments. These Details are Indicative and not binding Extreme values indicated are not achievable simultaneously
The picture may show optional equipment's that are not part of the standard supply. For details, refer to the quotation.



WORKS
1701, G.I.D.C. Industrial Estate, Ankleshwar – 393 002, Dist. Bharuch, Gujarat, India.

MUMBAI
+91 9769649949
mumbai@jpel.in

AHMEDABAD
+91 9924823700
marketing@jpel.in

DELHI
+91 7203034171
delhi@jpel.in

INDORE
+91 9826915344
indore@jpel.in

KOLKATA
+91 9830170833
kolkata@jpel.in

SOUTH INDIA
+91 9620678479
south@jpel.in

OVERSEAS-RUSSIA
+7 9267178402
vit@avk-polymer.ru

OVERSEAS-MENA
+971 55 799 2288
mena@jpel.in



JP GROUP

CONVERTING MACHINE


J P EXTRUSIONTECH
PVT. LTD.
www.jpel.in

CONVERTING MACHINE

Automatic fabric cutting machine

— Features

- Cutting Seamless Mouth Profile for Jumbo Bags.
- Ensuring Precise, Consistent Cuts in Bulk Production.
- Reducing Manual Effort with Pneumatic Operation.

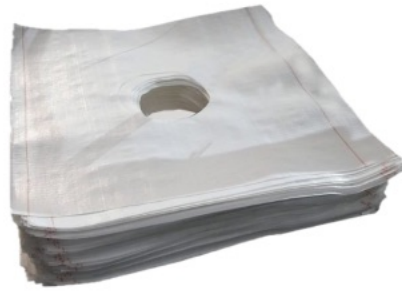

Belt cutting



- Belts used for Lifting FIBC (Jumbo Bags) are Precisely Cut to the Required Length.
- Processing Reinforcement Belts used in Packaging.
- Minimizing Manual Labor with an Efficient Pneumatic System.
- Integrated Testing and Certification System Configurable for Various Specialty FIBC Applications

— Application



Hydraulic Bale Press



— Features

- Efficient Volume Reduction: The Bale Press Compacts FIBC Jumbo Bags, Reducing Storage Space and Transportation Costs.
- High-Pressure Compression: Ensures Uniform and Dense Bales, Improving Material Handling and Waste Management.
- Cost-Effective Solution: Minimizes Warehouse Space Usage and Optimizes Logistics for Bulk Materials.

— Application

