




#### — Specifications

| MODEL                                 | For Polycoat      |                   | For Polycoat EC   |                   |
|---------------------------------------|-------------------|-------------------|-------------------|-------------------|
|                                       | Polycoat 1600     | Polycoat 1800     | Polycoat 1600 EC  | Polycoat 1800 EC  |
| Screw Dia (mm)                        | 90                | 90                | 80                | 80                |
| <b>Max. Output (Kg/hr.) (PP)</b>      | <b>220 to 240</b> | <b>220 to 240</b> | <b>140 to 160</b> | <b>140 to 160</b> |
| <b>Max. Output (Kg/hr.) (LDPE)</b>    | <b>250 to 270</b> | <b>250 to 270</b> | <b>160 to 180</b> | <b>160 to 180</b> |
| Die Width (mm)                        | 1650              | 1800              | 1650              | 1800              |
| Flat Fabric Coating Width (mm)        | 600 to 1500       | 660 to 1650       | 600 to 1500       | 660 to 1650       |
| Tubular Fabric Coating Width (mm)     | 300 to 700        | 330 to 750        | 300 to 700        | 330 to 750        |
| Coating Thickness (micron)            | 20 - 80           | 20 - 80           | 20 - 80           | 20 - 80           |
| Design Line Speed (mpm)               | 200               | 200               | 160               | 160               |
| Coating Line Speed (mpm)              | 180               | 180               | 150               | 150               |
| Secondary Unwinder                    | Two/Four          | Two/Four          | Two               | Two               |
| Corona for Woven Fabric (Single Side) | Included          | Included          | Optional          | Optional          |
| Preheating Unit (02 Nos.)             | Included          | Included          | Optional          | Optional          |
| Crane from Unwinder to Surface-Winder | Included          | Included          | Optional          | Optional          |
| Dimensions (L / W / H) (meter)        | 20.0 / 11.5 / 5.0 | 20.0 / 12.0 / 5.0 | 12.0 / 9.0 / 5.0  | 12.0 / 9.0 / 5.0  |

\* Special versions on request. Specifications are subject to change without prior notice, due to continuous developments. These are Indicative and not binding. Please refer quotation for technical details and scope of supply. It is not possible to reach all maximum values at the same time.

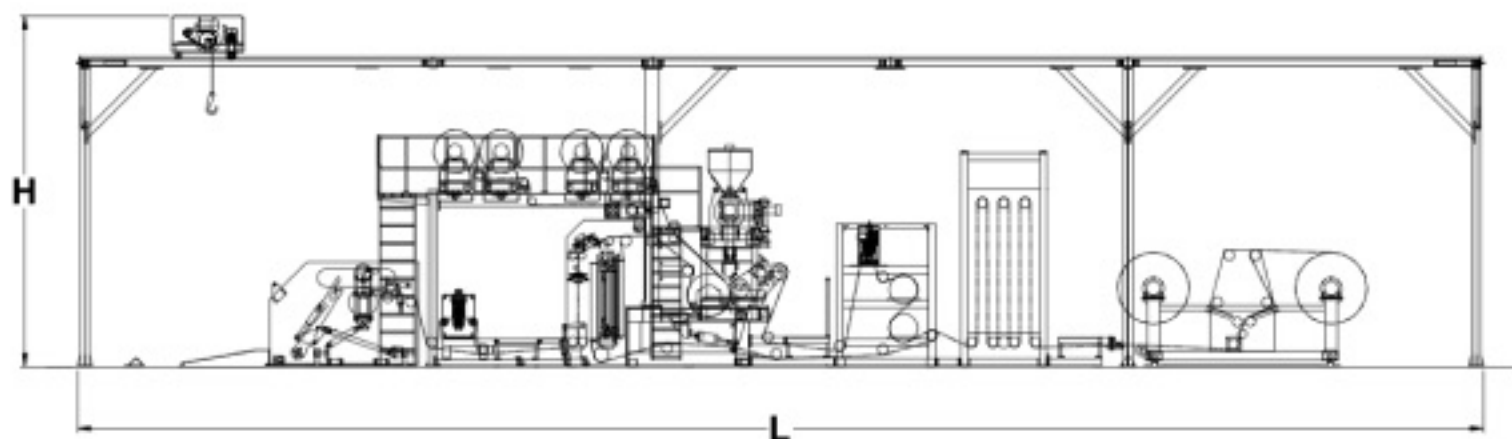

#### WORKS

1701, G.I.D.C. Industrial Estate, Ankleshwar - 393 002, Dist. Bharuch, Gujarat, India.

**MUMBAI**  
+91 9769649949  
mumbai@jpel.in

**AHMEDABAD**  
+91 9924823700  
marketing@jpel.in

**DELHI**  
+91 7203034771  
delhi@jpel.in

**INDORE**  
+91 9826915344  
indore@jpel.in

**KOLKATA**  
+91 9830170833  
kolkata@jpel.in

**SOUTH INDIA**  
+91 9620678479  
south@jpel.in

**OVERSEAS-RUSSIA**  
+7 9267178402  
vit@avk-polymer.ru

**OVERSEAS-MENA**  
+971 55 799 2288  
mena@jpel.in



**JP GROUP**

## EXTRUSION COATING FOR POLYCOAT

HIGH SPEED PACKAGING

J P EXTRUSIONTECH  
PVT. LTD.

[www.jpel.in](http://www.jpel.in)

Extrusion Coating for PolyCoat





The **PolyCoat Series** is specially designed for coating flat and tubular fabrics with **PP or LDPE** at speeds up to 200 m/min. Integrated with a secondary unwind station, it offers auto front-back registration for pre-printed BOPP films, ensuring alignment and coating accuracy.

- **Pre-Heating and Corona Treater**

The Pre-Heating and Corona Treatment is done to increase the coating quality and strengthen the lamination of the substrates.

- **Primary Unwinding Station**

The unwinding station features a pneumatic braking system for uniform fabric tension and an edge-guiding system for precise alignment, enabling full-speed auto-splicing without stopping.

- **Rewinding Station**

The rewinding station allows automatic splicing of finished fabric rolls at full speed without stopping. Rolls on pneumatic shafts are loaded via an overhead crane and unloaded easily using two hydraulic arms.

- **Extruder**

The extruder is mounted on a carriage for smooth vertical and forward-reverse movement. Its internal deckle feature allows easy adjustment of the air gap between the extruder and the laminator unit.

