

— Specifications

Model	STRAPEX 80-PET	STRAPEX 90-PET	STRAPEX 100-PET	STRAPEX 120-PET
PET FLAKES/GRANULES				
Screw Dia (mm)	80	90	100	120
L/D Ratio	30:1	30:1	30:1	30:1
Number of Straps	Two	Two	Four	Four
Strap Size (mm)	9, 12, 15, 19	9, 12, 15, 19	9, 12, 15, 19	9, 12, 15, 19
Max. Output (kg/h)	120 to 150	160 to 200	200 to 250	300 to 350
No. of Winders	3	3	5	5

Model	STRAPEX 70-PP	STRAPEX 80-PP
PP/HDPE		
Screw Dia (mm)	70	80
L/D Ratio	30:1	30:1
Number of Straps	Two	Four
Strap Size (mm)	9, 12, 15, 19	9, 12, 15, 19
Max. Output (kg/h)	75 to 80	160 to 180
Inline Printing	Single Colour	Single Colour
No. of Winders	3	5

*Specifications are subject to change without prior notice, due to continuous developments. These Details are Indicative and not binding. Please refer quotation for technical details and scope of supply. It is not possible to reach all maximum values at the same time.



WORKS
1701, G.I.D.C. Industrial
Estate, Ankleshwar –
393 002, Dist.
Bharuch, Gujarat,
India.

MUMBAI
+91 9769649949
mumbai@jpel.in

AHMEDABAD
+91 9924823700
marketing@jpel.in

DELHI
+91 7203034171
delhi@jpel.in

INDORE
+91 9826915344
indore@jpel.in

KOLKATA
+91 9830170833
kolkata@jpel.in

SOUTH INDIA
+91 9620678479
south@jpel.in

OVERSEAS-RUSSIA
+7 9267178402
vit@avk-polymer.ru

OVERSEAS-MENA
+971 55 799 2288
mena@jpel.in




BOX-STRAPPING
LINE

70 | 80 | 90 | 100 | 120

J P EXTRUSIONTECH
PVT. LTD.

www.jpel.in

Box - Strapping Line

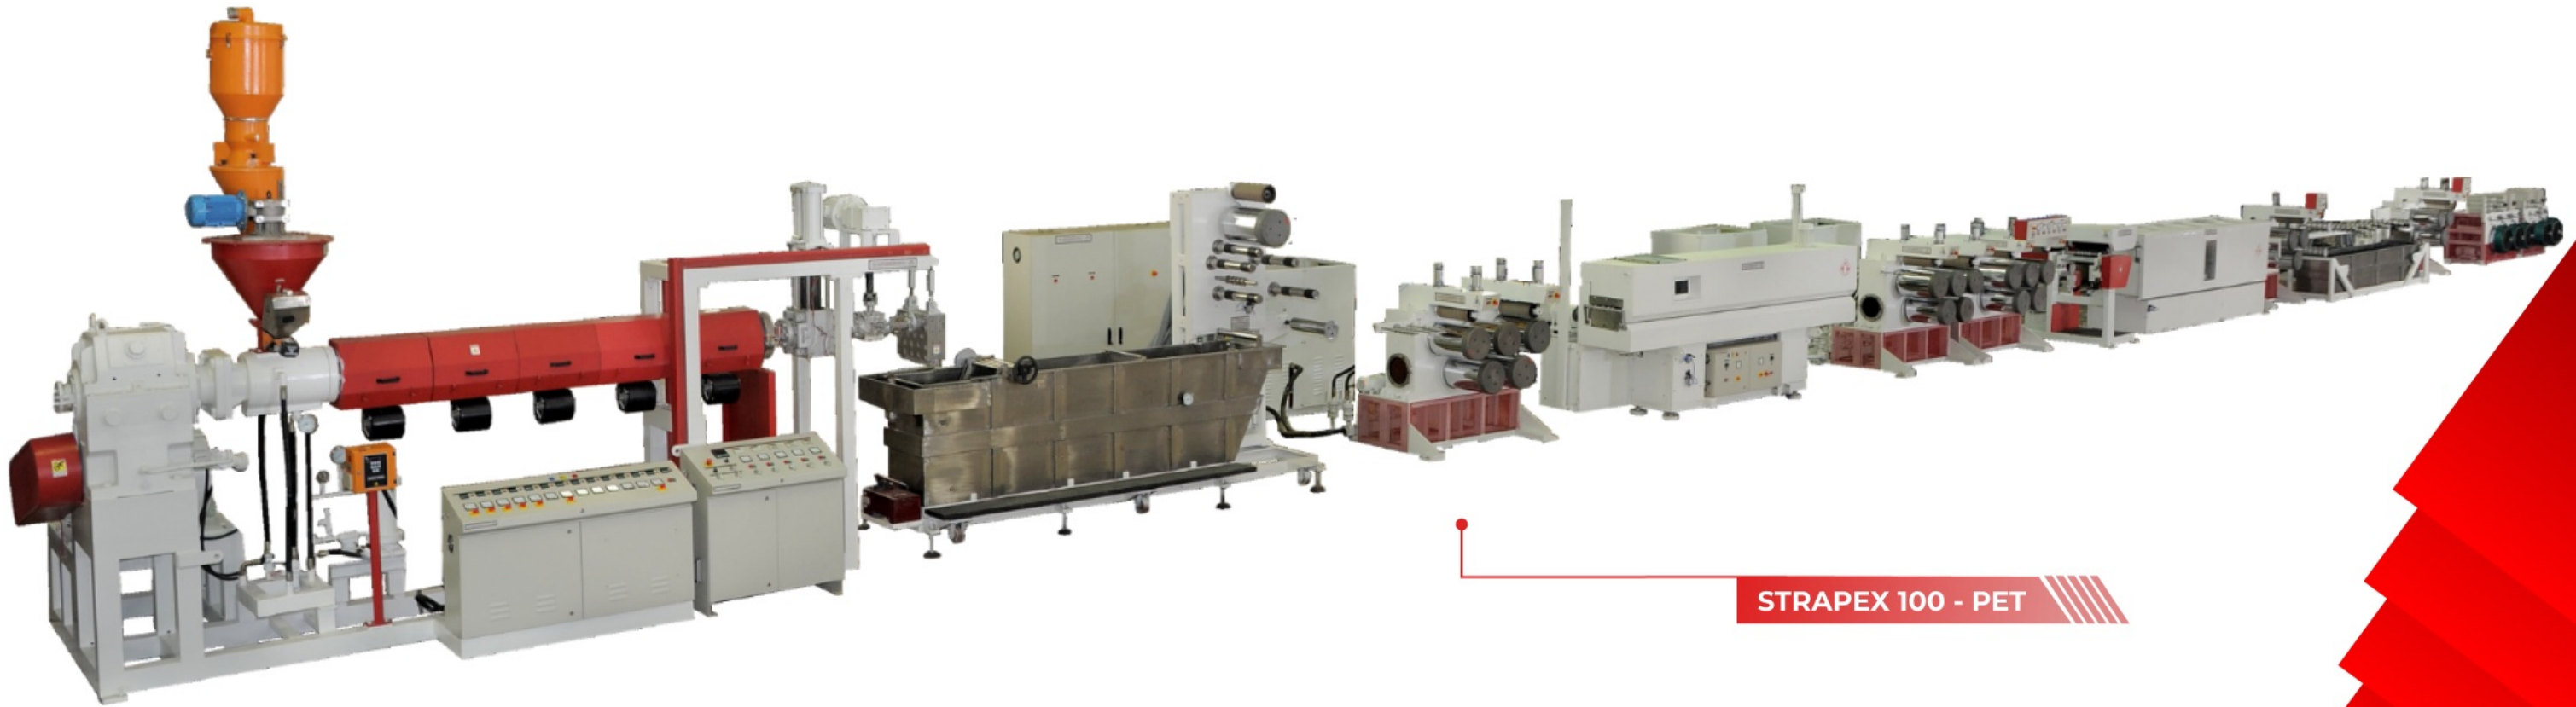

Engineered for excellence in packaging, these **PET and PP Box Strapping Lines** incorporate **Cutting-Edge Technology** to deliver high efficiency and superior strap quality for industrial applications.

— Features

- Plant is suitable for both 100% PET Flakes or PET Virgin Granules
- Dehumidified Air Dryer with Crystallizer
- Bimetallic Screw & Barrel
- Melt Pump
- Special oven for stretching of PET strap
- Stabilizing oven

— Applications

- Cotton Industry
- Jute Industry
- Textile Industry
- Steel Industry
- Wooden Box Packing
- Aluminium Industry
- Fibre Industry

