


— Winders



**Tape Winder
Inverter / Electronic**



**Auto Doffing
Tape Winder**

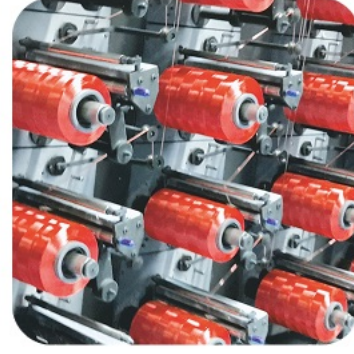

**Jumbo Winder
Fibrillated Tape**

— Specifications

MODEL	70R	80R	90R	105R
Screw Dia (mm)	70	80	90	105
Max. Output PP (Kg/Hr)	150	250	350	450
Max. Output HDPE (Kg/Hr)	130	230	330	430
Line Speed (mpm)	380	380	380	380
Godet Dia (mm)	318	318	318	318
No. of Godet Rolls	2/5	2/5	2/5	2/5

	105R HS	120R	150R
Screw Dia (mm)	105	120	150
Max. Output PP (Kg/Hr)	450	600	900
Max. Output HDPE (Kg/Hr)	430	550	850
Line Speed (mpm)	500	500	500
Godet Dia (mm)	450	450	450
No. of Godet Rolls	2/6	2/6	2/6

Range of Die width (mm) - 700/900/1000/1100/1200/1300/1400/1500/1600/1750/1900

* Actual processing speed depends on fabric size, construction, tape specifications and quality of tape.

** Special versions on request.

Specifications are subject to change without prior notice, due to continuous developments. These Details are Indicative and not binding.

Extreme values indicated are not achievable simultaneously

The picture may show optional equipment's that are not part of the standard supply. For details, refer to the quotation.



WORKS

1701, G.I.D.C. Industrial
Estate, Ankleshwar –
393 002, Dist.
Bharuch, Gujarat,
India.

MUMBAI

+91 9769649949
mumbai@jpel.in

AHMEDABAD

+91 9924823700
marketing@jpel.in

DELHI

+91 7203034171
delhi@jpel.in

INDORE

+91 9826915344
indore@jpel.in

KOLKATA

+91 9830170833
kolkata@jpel.in

SOUTH INDIA

+91 9620678479
south@jpel.in

OVERSEAS-RUSSIA

+7 9267178402
vit@avk-polymer.ru

OVERSEAS-MENA

+971 55 799 2288
mena@jpel.in



TAPE EXTRUSION LINE

70R | 80R | 90R | 105R | 120R | 150R

**J P EXTRUSIONTECH
PVT. LTD.**

www.jpel.in

Tape Extrusion Line

TAPE EXTRUSION LINE



- **Coat Hanger T-Die**

Energy-efficient coat hanger-type T-die with an increased cross-section, featuring a serrated or plated design to ensure the highest surface quality and flatness.

- **Energy Efficient Oven**

Energy efficient hot air oven with two separate phase angle voltage PID $\pm 1^\circ\text{C}$ accuracy. Electropneumatic system for top half opening and closing.

- **Movac Godet Rolls**

Specially design movac godet units with 450 mm Diameter for higher line speed upto 425MPM without any vibration and smooth working. All rolls are hard chrome plated for durability.

- **HMI**

High Resolution Industrial LCD (HMI) for easy operation and it is designed for recipe storage.

A versatile range of **Tape Extrusion Lines** engineered for the efficient production of high-quality **PP and HDPE tapes**. These lines support a broad array of end applications including **Woven and Leno Bags, Jumbo Bags (FIBCs), Tarpaulins, Carpet Backings, Geotextiles, Wrapping Fabrics, Ropes, and Twines**.

— Applications



PP/HDPE Tapes



Baler Twines