

SHELL FIBERS:INNOVATIVE CONCRETE COMPOSITES

**A Project Report
submitted
in partial fulfilment of the requirements for the degree of**

Bachelor Of Technology (B.Tech.)

in

Civil Engineering

(Session: 2025-26)

by

NEHA YADAV

(Roll No. - 2305250009013)

ANSHUMAN SINGH

(Roll No. - 2305250009011)

ADITYA RAO

(Roll No. -2305250009002)

SAURAV DUBEY

(Roll No. -2305250009019)

**Under the supervision of
Mr. RAHUL SHUKLA
(Assistant Professor)**



Buddha Institute Of Technology GIDA, Gorakhpur

Affiliated to

Dr. A.P.J. Abdul Kalam Technical University, Lucknow

Uttar Pradesh, India August, 2025

DECLARATION

I/We hereby declare that the work presented in this report entitled “**SHELL FIBERS:INNOVATIVE CONCRETE COMPOSITES**” was carried out by me/us. I/We have not submitted the matter embodied in this report for the award of any other degree or diploma of any other University or Institute.

I/We have given due credit to the original authors/sources for all the words, ideas, diagrams, graphics, computer programs, experiments, results, that are not my original contribution. I have used quotation marks to identify verbatim sentences and given credit to the original authors/sources.

I affirm that no portion of my work is plagiarized, and the experiments and results reported in the report are not manipulated. In the event of a complaint of plagiarism and the manipulation of the experiments and results, I shall be fully responsible and answerable.

NEHA YADAV	Roll No.- 2305250009013	_____
ANSHUMAN SINGH	Roll No. -2305250009011	_____
ADITYA RAO	Roll No. - 2305250009002	_____
SAURAV DUBEY	Roll No. - 2305250009019	_____

(Candidates' Signature)

Date: _____

Department of Civil Engineering

CERTIFICATE

This is to certify that the Project Report entitled “**Shell Fibre : Innovative concrete composites**” submitted by **Aditya Rao, Saurav Dubey, Neha Yadav, Anshuman Singh** in a partial fulfillment for the award of Bachelor’s Degree in Civil Engineering for Major Project [BCE 753] as prescribed by Dr. APJ Abdul Kalam Technical University, Lucknow Uttar Pradesh represents the work carried out by students under my supervision. The project embodies result of original work and studies carried out by the students themselves and the contents of the project do not form the basis for the award of any other degree to the candidate or to anybody else.

Mr. Rahul Shukla
(Assistant Professor)
Department of Civil Engineering
Buddha Institute of Technology, GIDA, Gorakhpur

Mr. Baijnath Nishad
(Assistant Professor & Head)
Department of Civil Engineering
Buddha Institute of Technology, GIDA, Gorakhpur

Date :- _____

ABSTRACT

This paper is the study of the comparison of cost, double shear, flexural strength & tensile strength of bamboo reinforcement with regularly used steel reinforcement. Recently Global warming is the major issue on which we want to focus. Generally in construction steel reinforcement is used but we know that the production of steel is very harmful for nature. The cost of steel is very high so that the middle class peoples are unable to use steel reinforcement. The construction industry is mainly depending on cost of project. The cost of project is mainly depends upon factors such as labour cost and material cost. So for reducing the cost of project we can replace the material such as we can use bamboo as reinforcement.

Bamboo is effective material for construction due to its low cost, high strength, earthquake resistant, light weight, etc. replacing this we can achieve our main objective that cost effective construction and we can also encourage the use of natural products by which we reduce the pollution impact on nature. By conducting the various tests and analyzing the result we say that we can use the Bamboo as reinforcement in various structural elements where load intensity is less such as Roof slab for security cabin, toilets, car parking etc. and achieve our objective. Coconut shell is one of the main contributors of pollution problem as a solid waste and people burn it for fire purposes which pollute air. Coconut shell used as coarse aggregate in concrete encouraged sustainable and environment friendly material in the construction field. Composites are made by combining two or more natural or artificial materials to maximize their useful properties and minimize their weaknesses and make this material useful. The Material such as cement, sand, gravel etc are using in construction is going to be out of reach day by day. First one it is a natural non-renewable material and second one it is going to be costly. Its natural abundance is decreasing on the other hand constructions are increasing. It is not easily available according to requirements. It is a matter of concern in this developing construction area. Nowadays, most of the researchers are doing on some renewable material which can reduce the cost of construction as well as increase the strength.

Research on waste material such as fly ash, rice husk, slag and sludge from treatment of industrial and domestic waste is being done. Use of coconut shell in concrete is not only useful economically but also environmentally useful for human being. Coconut shell is one of the main contributors of pollution problem as a solid waste and people burn it for fire purposes which pollute air. Coconut shell used as coarse aggregate in concrete encouraged sustainable and environment friendly material in the construction field. Key Words: Cost effective, Bamboo reinforcement,

ACKNOWLEDGEMENT

First and the foremost, we shall thank God Almighty who gave us the inner strength, resource and ability to complete the work successfully, without which all our efforts would have been in vain.

We are thankful to **Mr. Baijnath Nishad Sir, Head of the Department of Civil Engineering at Buddha Institute of Technology**, Gorakhpur for his valuable advice and motivation throughout.

We whole-heartedly thank our project guide **Mr. Rahul Shukla Sir (Assistant Professor, Dept. of Civil Engineering)** for his valuable advice and support.

We convey our sincere thanks to all the faculties and technical experts for their help and encouragement. We thank all our friends who have helped us during the work, with their inspiration and cooperation. We truly admire my parents for their constant encouragement and enduring support, which was inevitable for this success. Once again, we convey our gratitude to all those who have directly or indirectly influenced on the work.

ADITYA RAO

Roll No.– 2305250009002

SAURAV DUBEY

Roll No.– 2305250009019

NEHA YADAV

Roll No.– 2305250009013

ANSHUMAN SHINGH

Roll No.– 2305250009011

TABLE OF CONTENTS

	Page No.
Candidate's Declaration	i
Certificate	ii
Abstract	iii
Acknowledgement	iv
List of Table	xi
Chapter 1 INTRODUCTION	1-15
1.1 Background of the Study	1
1.2 Need for Green Construction Materials	2
1.2.1 Aim and Purpose of the Study	3
1.2.2 Significance of the Study	4
1.2.3 Organisation of the Report	5
1.2.4 Problem Statement	6
1.3 Water	6
1.4 Cement	8
1.5 Aggregates	9
1.6 Fine Aggregates	9
1.7 Fibre Glass Content	10
1.8 Curing Conditions	11
1.9 Advantage of Green Construction Material	12
1.10 Disadvantage of Green Construction Material	13
Chapter 2 LITERATURE REVIEW	16-19
2.1 Overview	16
2.2 Objectives of the Project	16
2.3 Scope of the Project	17
2.4 Limitations of the Project	17

2.5	Expected Outcomes	18
2.6	Use of Waste Materials	18
Chapter 3	GEOMETRIC MODELLING	20-22
3.1	Overview	20
3.2	Concept of Geometric Modelling	20
3.3.1	Compressive Strength Specimens	21
3.3.2	Flexural Strength Specimens	21
3.3.3	Split Tensile Strength Specimens	21
3.3.1	Modelling of Aggregate Replacement	21
3.3.2	Conclusion	22
Chapter 4	Experimental Result	23-24
4.1	Design procedure	23
	Concrete Mix Design Procedure	23
Chapter 5	CONCLUSION AND FUTURE SCOPE	25-26
7.1	Conclusions	25
7.2	Future scope	25
	REFERENCES	27
	REFERED CODES ARE-	27

LIST OF TABLES

Table No.	Description	Page No.
Table 1	Uses of Green Construction Materials	5-6
Table 2	Type of Cement	8-9
Table4	Fibre Content (% by weight of cement)	10
Table5	Properties of Green Construction Aggregates	12
Table 6	Mix proportion	23
Table 7	Compressive Strength Test (Cube 150×150×150 mm)	24

CHAPTER 1

INTRODUCTION

1.1 Background of the Study

In human civilization the construction industry is an integral part. We know that the cost of any construction project is mainly depending on financial factors such as cost of labours and material. We know that concrete is mostly used construction material which having different advantages like its availability, low cost, fire resistance etc. But it has low tensile strength. For getting tensile strength we provide steel reinforcement. For load bearing structures the steel reinforced concrete is used. Recently Global warming is the major issue so the main disadvantage of steel is its production. The cost of steel reinforcement will be increasing in future and the production will be shortening. We know that there are many projects which are working on concept 'low cost building' because any person from middle class family can construct the building. For that we want to find some alternatives. To tackle this environment that we can use the eco friendly



1.2 Need for Green Construction Materials

The construction sector contributes to nearly 40% of global CO₂ emissions and consumes a large portion of the earth's natural resources. The production of steel and cement alone accounts for a significant share of this environmental burden. Therefore, the adoption of green construction materials is not merely an academic exercise but a global necessity.

Using renewable and waste-derived materials such as bamboo, coconut shells, and glass fibres can mitigate several issues—ranging from energy consumption to waste management. These materials also contribute to lower embodied energy, improved sustainability, and reduced dependency on imported or energy-intensive materials

1. Environmental Sustainability

Reduction of Carbon Footprint: The manufacture of steel and cement contributes heavily to CO₂

emissions. Using renewable materials like **bamboo** and waste-derived materials such as **coconut shells** and **glass fibers** helps reduce carbon emissions.

Waste Utilization: Incorporating waste materials (e.g., coconut shells and recycled glass) in concrete promotes the recycling of agricultural and industrial waste, reducing landfill burdens and environmental pollution.

2. Conservation of Natural Resources

Conventional aggregates (gravel, crushed stone) are extracted from natural sources, causing depletion and ecological imbalance. Replacing them partially with coconut shell aggregates reduces dependence on natural quarries.

Bamboo, being a fast-growing renewable resource, serves as a sustainable substitute for steel reinforcement in certain structural applications.

3. Energy Efficiency and Cost Reduction

Green materials often require less energy to produce compared to steel or cement.

Locally available natural materials like bamboo and coconut shells can significantly reduce transportation costs and the overall embodied energy of construction.

4. Improved Performance and Innovation

Adding **glass fibers** improves the tensile strength and durability of concrete, compensating for reductions in strength caused by waste aggregate replacement.

Green composites offer new opportunities for material innovation, combining sustainability with functional performance.

5. Compliance with Sustainable Development Goals (SDGs)

The use of eco-friendly construction materials aligns with the United Nations SDG 9 (Industry, Innovation, and Infrastructure) and SDG 12 (Responsible Consumption and Production), promoting sustainable industrial practices and resource efficiency.

1.2.1 Aim and Purpose of the Study

The primary aim of this study is to investigate the feasibility of utilising bamboo as a partial replacement for steel reinforcement and coconut shell and glass fibres as substitutes for conventional aggregates in concrete. The purpose is to evaluate their mechanical, structural, and environmental performance to determine whether they can serve as viable green alternatives in construction.

Purpose of the Study

The purpose of this study is to:

- **Promote Sustainable Construction Practices**
To encourage the use of renewable and waste-based materials in the construction industry, reducing environmental degradation and promoting green building concepts.
- **Reduce Dependence on Conventional Materials**
To explore alternative materials such as bamboo and coconut shell that can partially replace steel and natural aggregates, thereby conserving natural resources and minimizing carbon emissions.
- **Evaluate Mechanical and Structural Performance**
To analyze the compressive strength, flexural strength, and durability of concrete incorporating bamboo, coconut shell, and glass fibers, comparing their performance with conventional concrete.
- **Utilize Agricultural and Industrial Waste**
To provide an effective solution for managing agricultural waste like coconut shells and recycled materials like glass fibers, turning waste into valuable construction resources.
- **Contribute to Cost Reduction in Construction**
To assess the economic viability of using locally available green materials, potentially lowering construction costs in developing regions.
- **Support Sustainable Development Goals (SDGs)** To align construction practices with global sustainability initiatives, particularly focusing on resource efficiency, waste reduction, and climate action.
7 Advancement of Green Building Technologies
To contribute to the ongoing research and development of green construction materials that meet modern engineering and sustainability standards.
To provide data and recommendations that can be used by engineers, architects, and policymakers to implement green materials in future projects.
To align construction practices with **United Nations Sustainable Development Goals (SDGs)**—particularly SDG 9 (Industry, Innovation, and Infrastructure), SDG 11 (Sustainable Cities and Communities), and SDG 12 (Responsible Consumption and Production).
- **8. Social and Educational Impact**
To increase awareness among engineers, builders, and students about the benefits and potential of sustainable materials.
To encourage the adoption of environmentally responsible building techniques in both academic research and practical construction fields.

1.2.2 Significance of the Study

This study contributes to the growing body of knowledge in sustainable civil engineering. By examining alternative materials that are both renewable and locally available, it seeks to address global environmental challenges while offering region-specific solutions.

Incorporating bamboo, coconut shell, and glass fibres can reduce material costs, energy use, and waste generation, aligning with the principles of sustainable development. Furthermore, these materials can encourage local economies by promoting the use of agricultural and industrial by-products.

1. Environmental Significance

- **Reduction of Carbon Footprint:**

The construction industry is one of the largest contributors to greenhouse gas emissions. The production of steel and cement involves high energy consumption and CO₂ emissions. By replacing a portion of these materials with bamboo and recycled components like coconut shells and glass fibers, the overall carbon footprint of construction projects can be significantly reduced.

- **Conservation of Natural Resources:**

Using waste materials and renewable resources helps preserve non-renewable materials such as stone aggregates and metal ores. Bamboo, being fast-growing and renewable, offers a sustainable alternative to steel reinforcement, while coconut shells provide an eco-friendly substitute for coarse aggregates.

- **Waste Management:**

The study contributes to effective waste utilization by converting agricultural waste (coconut shells) and industrial waste (glass fibers) into valuable construction materials. This approach reduces landfill accumulation and environmental pollution, supporting circular economy principles.

2. Economic Significance

- **Cost-Effective Construction:**

By using locally available and renewable materials, construction costs can be reduced, especially in rural and developing regions. Bamboo and coconut shells are inexpensive and widely accessible in tropical countries, making this approach economically viable.

- **Employment and Local Industry Development:**

Promoting the use of bamboo and coconut shell products can create new livelihood opportunities in farming and local processing industries, boosting the local economy and supporting sustainable rural development.

- **Reduction in Material Import Costs:**

The adoption of indigenous materials reduces dependence on imported construction materials like steel and processed aggregates, improving national economic resilience.

3. Technical and Engineering Significance

- **Material Innovation:**

The study encourages innovation by developing new types of sustainable composite materials that combine strength, durability, and eco-friendliness.

- **Performance Enhancement:**

Incorporating glass fibers in concrete helps enhance tensile and flexural strength, compensating for potential reductions caused by the inclusion of lightweight or waste aggregates.

- **Adaptability to Modern Construction:**

The findings can guide engineers and architects in applying green materials in both small-scale and large-scale construction, without compromising structural safety and performance.

4. Social Significance

- **Promotion of Sustainable Lifestyles:**

The research raises awareness about the importance of environmentally responsible construction among students, professionals, and the general public.

- **Improvement of Living Standards:**

The development of low-cost, sustainable building materials can make quality housing more affordable, particularly in developing nations.

- **Educational Contribution:**

The study provides valuable academic insights for civil engineering and architecture students, serving as a reference for future research and innovation in green construction.

5. Contribution to Sustainable Development Goals (SDGs)

This study supports global efforts toward sustainable development by addressing key goals such as:

- **SDG 9:** Industry, Innovation, and Infrastructure – promoting sustainable and resilient infrastructure.
- **SDG 11:** Sustainable Cities and Communities – making cities inclusive, safe, and environmentally friendly.
- **SDG 12:** Responsible Consumption and Production – ensuring efficient resource use and waste reduction.
- **SDG 13:** Climate Action – mitigating the impact of construction on climate change through green material adoption.

1.2.3 Organisation of the Report

Report is organised into eight chapters. Chapter 1 introduces the concept of green construction materials And This outlines the study’s objectives and significance. Chapter 2 discusses the detailed objectives, scope, and limitations. Chapter 3 presents a comprehensive review of related literature. Chapter 4 describes the materials and methodologies adopted. Chapter 5 elaborates on the mix design and experimental programme. Chapter 6 includes results and discussions, while Chapter 7 covers environmental and cost analyses. Finally, Chapter 8 summarises conclusions and offers recommendations for future research.

Table 1:- Uses of Green Construction Materials

Green Construction Material	Main Use in Construction	Benefits	Examples of Application
Bamboo	Replacement for steel reinforcement, scaffolding, and flooring	Renewable, lightweight, high tensile strength	Reinforced concrete structures, flooring, roofing
Coconut Shell Aggregate	Partial replacement for coarse aggregates in	Reduces waste, lightweight, improves	Concrete blocks, pavements, low-load

	concrete	insulation	structural works
Glass Fibre	Added to concrete for reinforcement	Increases tensile strength, crack resistance, and durability	GFRC panels, decorative facades, precast elements
Fly Ash	Supplementary cementitious material replacing cement	Reduces CO ₂ emissions, enhances workability and strength	Concrete mix, bricks, Tiles
Recycled Plastic	Used in bricks, pavers, tiles, and insulation	Diverts waste plastic from landfills, durable, water-resistant	Paver blocks, wall panels, insulation boards
Recycled Steel	Used as reinforcement or structural frames	Saves energy, reduces mining, strong and recyclable	Structural frames, beams, rebar
Green Concrete	Concrete made with industrial waste or alternative aggregates	Lower carbon footprint, cost-effective	Roads, slabs, Foundations
Solar Reflective Roofing Material	Reduces heat absorption on roofs	Lowers cooling cost, improves energy efficiency	Roof coatings, tiles, membranes

1.2.4 Problem Statement

Traditional construction methods rely heavily on materials that are energy-intensive, costly, and environmentally damaging. Steel, though widely used for reinforcement, contributes significantly to greenhouse gas emissions. Similarly, natural aggregates are mined in large quantities, causing landscape degradation and depletion of natural resources.

Hence, there is a pressing need to explore alternative materials that provide comparable or improved performance characteristics while reducing environmental impact. The partial replacement of steel with bamboo and aggregates with coconut shell and glass fibres presents a promising approach to sustainable development

1.3 Water

Water is one of the most essential ingredients in concrete production, as it participates in the hydration reaction of cement and significantly influences the workability, strength, and durability of the mix. In this project, water plays a crucial role in ensuring proper bonding between cement, fine aggregates, coconut shell aggregates, and glass fibres. The water used must be clean, potable, and free from impurities such as oils, acids, alkalis, salts, organic matter, or other harmful substances that could affect the setting time and strength of concrete. Generally, if water is fit for drinking, it is considered suitable for making concrete.

1. Water–Cement Ratio (w/c)

The water–cement ratio (w/c ratio) is maintained carefully according to the mix design to achieve optimum strength and workability. An ideal water–cement ratio ensures complete hydration without causing segregation or excessive bleeding. In this study, the water is measured accurately before mixing and added gradually to the dry ingredients to maintain uniform consistency.

Proper curing water is also essential after casting, as it ensures continuous hydration and prevents cracks due to rapid drying. The specimens are cured for a minimum of 7 to 28 days to achieve desired strength and durability. The water–cement ratio (w/c ratio) is maintained carefully according to the mix design to achieve optimum strength and workability. An ideal water–cement ratio ensures complete hydration without causing segregation or excessive bleeding. In this study, the water is measured accurately before mixing and added gradually to the dry ingredients to maintain uniform consistency.

Proper curing water is also essential after casting, as it ensures continuous hydration and prevents cracks due to rapid drying. The specimens are cured for a minimum of 7 to 28 days to achieve desired strength and durability. Usually kept between 0.40 – 0.60 for lightweight concrete

Water–Cement Ratio (w/c) = $\frac{\text{Weight of Cement}}{\text{Weight of Water}}$

Importance of Water–Cement Ratio

1. Strength of Concrete:

The compressive strength of concrete largely depends on the water–cement ratio. A **lower w/c ratio** leads to **higher strength**, as less water means reduced porosity and denser concrete. However, too low a ratio can make the mix stiff and difficult to work with.

1. Workability:

Increasing the water content improves the **workability** of the concrete, making it easier to mix, place, and compact. However, excessive water weakens the concrete by increasing voids and capillary pores.

2. Durability:

Concrete with an optimal water–cement ratio exhibits greater resistance to weathering, chemical attack, and water penetration. A low w/c ratio results in less permeability, which improves long-term durability.

3. Bond Strength:

Proper water content ensures adequate hydration of cement, promoting a strong bond between the cement paste and aggregates or reinforcements (such as bamboo or steel).

Typical Range of Water–Cement Ratios

- For high-strength concrete: 0.35 – 0.45
- For medium-strength concrete: 0.45 – 0.55
- For normal construction work: 0.50 – 0.60

The **optimum water–cement ratio** depends on factors such as the desired strength, type of cement, aggregate size, and environmental conditions.

- **Water–Cement Ratio in Green Concrete Mix**

In this study, where **bamboo** is used as partial reinforcement and **coconut shell and glass fibers** are used as aggregate replacements:

The water–cement ratio must be carefully selected to balance **workability** and **strength**.

Coconut shell aggregates, being more porous than natural aggregates, may absorb more water, requiring slight adjustments in mix water or pre-soaking of shells.

Glass fibers may reduce workability due to their surface area, so maintaining the correct water content is critical to ensure proper mixing and uniform fiber distribution.

An optimal water–cement ratio in the range of **0.45 to 0.50** is generally suitable for achieving good strength and workability in such green concrete mixes.

1.4 Cement

In Green construction material, cement plays the same role as in normal concrete – it acts as the binding material that holds aggregates and other constituents together after hydration. But in lightweight concrete, its use and behavior are slightly different because of the special aggregates and mix proportions.

Table 2;3 :-Type of Cement Used

Type of Cement	IS Code Reference	Description / Composition	Properties	Reason for Selection in This Project
Ordinary Portland Cement (OPC) – 43 Grade	IS 8112:2013	Manufactured from clinker and gypsum; contains about 95% clinker and 5% gypsum.	High early strength, good workability, suitable for general construction.	Provides required strength and bonding for concrete with alternative aggregates like coconut shell and fibres.
Portland Pozzolana Cement (PPC)	IS 1489 (Part 1):2015	Contains 15–35% pozzolanic material (fly ash, volcanic ash, etc.) blended with OPC clinker.	Improved workability, lower heat of hydration, enhanced durability, resistant to chemical attacks.	Chosen for eco-friendly and sustainable construction; reduces carbon footprint. Ideal for “green concrete.”
Rapid Hardening Portland	IS 8041:1990	Similar to OPC but finely ground and rich in C ₃ S (tricalcium silicate).	Gains strength faster; suitable where early	Can be used for precast

Cement (RHPC)			formwork removal is desired.	bamboo-reinforced elements requiring early strength.
Coarse Aggregate	Coconut Shell	Partial replacement of natural coarse aggregates	Lightweight, reduces waste, improves insulation	Lightweight concrete, pavements, non-load-bearing walls
Fine Aggregate	Manufactured Sand (M-Sand)	Alternative to river sand	Consistent quality, reduces river erosion	All concrete works, plastering, masonry
Fine Aggregate	Crushed Glass Powder	Partial replacement for fine aggregate	Enhances strength, reduces environmental impact	Decorative finishes, eco-concrete
Fine Aggregate	Foundry Sand / Quarry Dust	Partial replacement for sand	Utilises industrial waste, cost-effective	Concrete blocks, road sub-base
Fine Aggregate	Bottom Ash	Partial replacement for fine aggregate	Reduces use of natural sand, improves sustainability	Subgrade filling, masonry blocks

1.6 Fine Aggregates

Fine aggregate is the material that passes through a 4.75 mm IS sieve and is retained on a 75 μ m sieve. In lightweight concrete, fine aggregate is essential for filling voids, improving workability, and providing a smooth surface finish.

Types of Fine Aggregates Used

(a) Natural Fine Aggregates

River sand (most common, if available).

Crushed stone sand (M-sand) – manufactured sand from crushing rocks.

(b) Alternative Fine Aggregates

Crushed lightweight coarse aggregates (like pumice or expanded clay fines). Fly ash – acts both as filler and pozzolanic material.

Silica fume / stone dust – improves packing and reduces porosity.

Properties of Fine Aggregate

Grading: Should be well-graded (Zone II as per IS:383 preferred). **Fineness modulus (FM):** 2.3 – 3.1 (medium sand is ideal).

Cleanliness: Should be free from silt, clay, organic matter.

Bulk density: 1400 – 1700 kg/m³ (lighter than coarse aggregate).

Absorption: Higher when lightweight fines (pumice fines, fly ash) are used.

1.7 Fibreglass (Glass Fibre) Content in Concrete

1. Definition:

Fibreglass, or glass fibre, is a material made from very fine strands of glass that are woven together or mixed into concrete to improve its strength and durability.

2. Typical Glass Fibre Content in Concrete

The amount of glass fibre added to concrete depends on the desired properties (strength, toughness, crack resistance).

Table 4:- Fibre Content (% by weight of cement)

Fibre Content (% by weight of cement)	Typical Use / Effect
0.25% – 0.5%	Used for minor crack resistance and surface finish improvement.
0.5% – 1.0%	Common range for structural and non-structural applications; enhances tensile, flexural, and impact strength.
1.0% – 1.5%	Provides higher toughness, better load distribution, but may reduce workability of the mix.
> 2%	Rarely used; may cause poor workability and fibre clustering unless special mixing is applied.

For your project, the recommended glass fibre content is 0.5% to 1% by weight of cement — this balance offers improved strength and durability without compromising workability.

3. Purpose of Adding Fibreglass

- Enhances tensile strength of concrete.
- Controls plastic shrinkage cracks and thermal cracking.
- Improves impact resistance and durability.
- Increases ductility and fatigue resistance.

4. Type of Fibreglass Used

- **E-glass (Electrical grade)** is most common for concrete — high strength, non-corrosive, and alkali-resistant when coated.

5. Example Mix

If you use 1% glass fibre by weight of cement and your mix uses 400 kg of cement per cubic metre, then:

$$\text{Glass fibre} = 1\% \times 400 \text{ kg} = 4 \text{ kg/m}^3$$

1.9 Curing Water

Concrete is more prone to drying shrinkage.

Continuous curing for 7–28 days is essential to achieve design strength. Methods: ponding, sprinkling, wet coverings, or curing compounds.

Types of Green Construction Aggregates

- **Coconut Shell Aggregate**

Coconut shells, a by-product of the coconut industry, are lightweight and strong, making them suitable as partial replacements for coarse aggregates. They improve insulation properties, reduce concrete density, contribute to sustainability by utilising agricultural waste.

- **Recycled Concrete Aggregate (RCA)**

Obtained by crushing and processing old concrete debris, RCA helps conserve natural resources and minimise landfill waste. It provides adequate strength for use in non-structural and low-load-bearing components.

- **Expanded Clay Aggregate**

Made by heating natural clay at high temperatures, this lightweight aggregate has good thermal and acoustic insulation properties. It is often used in eco-friendly and energy-efficient construction.

- **Crushed Glass Aggregate**

Waste glass can be processed into fine or coarse aggregates. When used in small quantities, it enhances the appearance and durability of concrete while promoting recycling of non-biodegradable waste.

Table 5:- Properties of Green Construction Aggregates

Property	Conventional Aggregate (Crushed Stone / Gravel)	Green Aggregate (Coconut Shell & Glass Fibre)	Remarks
Appearance	Angular and rough	Irregular, fibrous, and slightly porous	Enhances bonding with cement paste
Bulk Density (kg/m³)	1400 – 1600	550 – 650 (Coconut Shell)	Lightweight concrete formation
Specific Gravity	2.6 – 2.8	1.1 – 1.3	Lower weight reduces dead load
Water Absorption (%)	0.5 – 2.0	15 – 20	Higher absorption requires controlled w/c ratio
Compressive Strength (MPa)	25 – 35	20 – 30	Slightly lower but acceptable for light structures
Tensile Strength (MPa)	2.0 – 3.0	2.5 – 3.5 (with glass fibres)	Glass fibres enhance tensile properties
Impact Resistance	Moderate	High (Coconut Shell absorbs shock)	Better energy absorption
Thermal Conductivity	High	Low	Provides better insulation
Durability	Very high	Moderate to high (depends on curing)	Suitable for non-load-bearing and light Structures
Eco-friendliness	Low	Very High	Uses renewable and waste materials
Cost Efficiency	Moderate	High	Reduces material and transport cost

1.10 Advantages of Green Construction Material

1. Environmental Advantages

- **Sustainability:**
Bamboo, coconut shell, and glass fibers are renewable or recycled resources, reducing dependence on non-renewable materials like steel and natural stone.
- **Reduced Carbon Footprint:**
Steel and cement production emit large amounts of CO₂. Replacing part of these with bamboo and waste materials significantly lowers greenhouse gas emissions.
- **Waste Utilization:**
Using **coconut shells** and **waste glass fibers** diverts agricultural and industrial waste from landfills, promoting a **circular economy**.
- **Energy Efficiency:**
Bamboo and coconut shell processing require less energy than manufacturing steel or quarrying aggregates.

2. Structural and Mechanical Advantages

- **Coconut Shell Aggregates:**

Lower density → lightweight concrete, useful in non-load-bearing structures or low-rise buildings.
Good impact resistance and sound absorption properties.

- **Glass Fibers:**

Improve **tensile, flexural, and impact strength** of concrete. Enhance **crack resistance** and **durability**.

Reduce shrinkage and increase toughness of concrete.

3. Economic Advantages

- **Cost-Effective:**

Locally available coconut shells can reduce transportation and material costs.

- **Job Creation:**

Promotes local industries (coconut shell processing, glass recycling).

- **Reduced Maintenance Costs:**

Enhanced durability through fiber reinforcement and crack control decreases long-term repair costs.

4. Performance & Construction Benefits

- **Lightweight:**

Easier handling and reduced foundation requirements.

- **Thermal and Acoustic Insulation:**

Coconut shell concrete provides better insulation, improving indoor comfort.

1.11 Disadvantages of Green Costruction Material

1. Structural and Mechanical Limitations

- **Lower Strength:**

Coconut shell concrete generally has lower compressive strength compared to conventional concrete, limiting its use to non-structural or low-load applications.

Bamboo, while strong in tension, is not as strong or consistent as steel and may not meet strength requirements for high-rise or heavy-load structures.

- **Variable Material Properties:**

Natural materials like bamboo and coconut shells have inconsistent physical properties (density, moisture content, fiber alignment), making quality control difficult.

- **Durability Issues:**

Bamboo is prone to decay, insect attack, and moisture absorption if not properly treated. Coconut shells can absorb water, affecting workability and long-term strength of concrete.

2. Processing and Treatment Challenges

- **Surface Bonding:**

Achieving good bond strength between bamboo and concrete can be challenging due to bamboo's smooth surface and dimensional changes from moisture.

- **Preparation Complexity:**

Crushing and grading coconut shells and mixing glass fibers require controlled processing to ensure uniformity.

3. Construction and Handling Issues

- **Workability Problems:**

Coconut shell aggregates are irregular and lightweight, reducing concrete workability and making compaction more difficult.

- **Difficult Reinforcement Integration:**

Bamboo reinforcement requires special anchorage techniques and careful joint design to avoid

slippage.

- **Fiber Dispersion:**

Improper mixing of glass fibers can lead to clumping, reducing strength instead of improving it.

4. Economic and Practical Drawbacks

- **Limited Availability (in Some Regions):**

Bamboo and coconut shells may not be locally available everywhere, increasing transport costs.

- **Higher Initial Labor Costs:**

Skilled labor is needed for bamboo treatment, curing, and proper fiber mixing.

- **Non-standardization:**

Lack of standardized codes and design guidelines makes it difficult to use these materials in major structural projects.

Material	Key Issue	Effect
Coconut Shell (as aggregate)	High water absorption, irregular shape	Reduced workability and compressive strength
Glass Fiber	Difficult to mix uniformly	Uneven strength, possible microcracking
General	Lack of codes and standards	Limited large-scale adoption

1 Reduced Self-Weight

LWC has a density of 300–1800 kg/m³, much lower than normal concrete (~2400 kg/m³).

This significant reduction in weight makes it easier to lift, carry, and place at the construction site.

1. Simplified Transportation

LWC can be transported using smaller cranes, forklifts, or manual labor in some cases. Reduces the need for heavy machinery, lowering construction cost and time.

2. Ease in Precast Units

Precast elements like blocks, panels, beams, and roof slabs are lighter → easier to stack, store, and install. Reduces handling damage during storage and erection.

3 Better Workability on Site

Lower weight allows faster placement and compaction.

Foam in foamed concrete or lightweight aggregates improves pumpability, making it suitable for slabs, walls, and inaccessible areas.

1.4 Influencing parameters

1. Materials Parameters

a. Cement Type and Content:

Ordinary Portland Cement (OPC) is commonly used. Cement content affects strength, workability, and durability

b. Aggregates:

Lightweight Aggregates (LWFC): Expanded clay, shale, pumice, perlite, or foamed aggregates.

Fine Aggregates (sand): May be natural or manufactured.

Aggregate type influences density, strength, and thermal insulation.

c. Water-to-Cement Ratio (w/c):

Lower w/c increases strength but reduces workability. Excess water can cause segregation and reduce density

CHAPTER 2

LITERATURE REVIEW

2.1. Overview

Every engineering study requires a clearly defined set of objectives and boundaries to ensure that the research remains focused, achievable, and relevant. This chapter outlines the aims, scope, and limitations of the present study on green construction materials, which seeks to replace traditional construction materials with more sustainable alternatives such as bamboo, coconut shell, and glass fibres.

- **Concept**

Coconut shells, an agricultural waste product, are used as partial replacement for coarse aggregates, reducing the need for natural stone and helping manage waste.

Glass fibers are added to concrete to improve tensile, flexural, and crack resistance properties.

2.2 Objectives of the Project

The specific objectives are as follows:

- To study the physical and mechanical properties of bamboo, coconut shell, and glass fibres.
- To develop a concrete mix using these alternative materials and evaluate its structural performance.
- To analyse the strength characteristics of the modified concrete in terms of compressive, flexural, and tensile behavior. To compare the experimental findings with conventional concrete results and evaluate performance differences.
- To assess the economic and environmental benefits achieved through material substitution.
- To promote the concept of sustainable construction by encouraging the utilisation of renewable and waste-derived materials.

1. Sustainable Material Development

Develop eco-friendly concrete or composite materials by partially replacing conventional steel with bamboo and aggregates with coconut shell.

- **Waste Utilization:** Promote the use of agricultural waste (coconut shells) in construction, reducing environmental pollution and landfill usage.
- **Cost Reduction:** Reduce the cost of construction by using locally available and renewable materials like bamboo and coconut shell.
- **Structural Performance Enhancement:** Investigate the effect of glass fiber reinforcement on the strength, durability, and ductility of the composite.
- **Reduce Carbon Footprint:** Minimize CO₂ emissions associated with steel production by replacing part of the steel with bamboo.
- **Lightweight Construction:** Develop lighter construction materials to reduce the overall dead load of structures.

- **Experimental Evaluation:**Analyze mechanical properties (compressive strength, tensile strength, flexural strength) and durability of these green construction materials.

Scope of the Project

This study focuses on the partial replacement of steel reinforcement with bamboo and conventional aggregates with coconut shell and glass fibres in concrete. The project primarily involves laboratory-level experimental investigation, data collection, and analysis. The scope includes the preparation of concrete specimens, evaluation of their mechanical properties, and interpretation of results. The materials considered for this study are locally available and renewable. The investigation will help identify sustainable alternatives suitable for low- to medium-load structural applications, such as residential and small commercial buildings. The study also provides a framework for future research aimed at scaling up the use of these materials in larger projects.

2.3 Limitations of the Project

While the study presents innovative approaches to sustainable material use, it is subject to certain limitations, including:

- **Lower Load-Bearing Capacity:**
Bamboo, while strong in tension, may not fully match the compressive and flexural strength of steel in structural applications. This limits its use in high-load structures.
- **Durability Concerns:**
Bamboo is prone to decay, termite attack, and moisture absorption if not properly treated. Coconut shell aggregates may also have lower durability compared to conventional aggregates.
- **Limited Standardization:**
There is no universal standard for using bamboo and coconut shell in reinforced concrete, making design and structural calculations more challenging.
- **Quality Variation:**
Natural materials like bamboo and coconut shells vary in quality, size, and strength, which may affect consistency in construction.
- **Processing Requirements:**
Bamboo must be treated and sometimes coated to prevent decay. Coconut shells may require crushing and cleaning. These processes can add time and labor costs.
- **Bonding Issues:**
Bamboo may not bond as well with cement paste as steel does, potentially reducing tensile and flexural performance.
- **Limited Structural Applications:**
Best suited for low- to medium-load structures or non-structural elements. Not ideal for high-rise buildings or heavy load-bearing applications.
- **Environmental Sensitivity:**
Moisture, pests, and climatic conditions can negatively impact the longevity of bamboo-reinforced elements.
- **Testing and Research Required:**
Extensive experimental testing is needed to determine optimal mix proportions, treatment methods, and fiber content for reliable performance.
- **Aesthetic Limitations:**
Some green construction materials may have surface imperfections or color variations that could

affect finish quality.

Expected Outcomes

It is anticipated that this project will contribute valuable data and insights to the growing field of sustainable construction materials. The expected outcomes include:

Identification of optimal replacement ratios for bamboo, coconut shell, and glass fibres in concrete.

Comparative evaluation of mechanical properties between green concrete and traditional concrete.

Demonstration of the feasibility of using renewable and waste-based materials in construction.

Establishment of a foundation for future large-scale research and industrial applications of eco-friendly construction materials.

Development of Eco-Friendly Concrete/Composite Material:

A sustainable construction material with partial replacement of steel by bamboo and aggregates by coconut shell, reinforced with glass fibers.

Mechanical Property Evaluation:

Determination of compressive, tensile, and flexural strength of the new material and comparison with conventional concrete.

Durability Assessment:

Evaluation of resistance to cracking, water absorption, and other environmental effects to determine the long-term performance of the material.

Cost Efficiency:

Quantification of material cost savings due to the partial replacement of steel and conventional aggregates.

Lightweight Construction Material:

Creation of a material with reduced density, making it easier to transport and suitable for low-cost housing and non-structural applications.

Environmental Impact Reduction:

Lowered carbon footprint due to reduced use of steel and better utilization of agricultural waste like coconut shells.

2.6 Use of Waste Materials

1. Types of Waste Materials and Their Role

Rice Husk Ash (RHA) Agricultural residue Partial cement replacement Reduces porosity, improves thermal insulation and durability Blast Furnace Slag (GGBS) Steel industry Partial cement replacement Improves strength, reduces heat of hydration, enhances durability Glass Waste Broken bottles, industrial glass Aggregate replacement or filler Reduces density, improves aesthetics, may enhance strength if finely Ground Construction & Demolition Waste Concrete and brick debris Aggregate replacement Reduces cost, sustainable; may slightly reduce strength if coarse particles dominate Plastic Waste PET bottles, packaging Partial aggregate replacement Reduces density; improves insulation, but may reduce compressive strength

Benefits of Using Waste Materials

- **Environmental:** Reduces landfill and carbon footprint. **Economic:** Reduces cost of cement and natural aggregates.
- **Structural:** Can improve thermal insulation, fire resistance, and durability.
- **Innovative Materials:** Enables lightweight, high-performance concrete for non-structural and structural applications.

Properties of Glass Fibers

Property	Description
Diameter	Typically 10–20 μm
Length	6–18 mm (depending on application)
Density	~2.5 g/cm ³ Tensile Strength 1700–3500 MPa
Alkali Resistance	AR coating prevents degradation in cementitious matrix
Effect in Green Construction Material :- Improves flexural and tensile strength, reduces shrinkage cracking	

Role in Green Construction Material

Crack Bridging: Fibers span micro-cracks, preventing propagation.

Flexural and Tensile Strength Improvement: Particularly important for low-density .

Durability: Fibers improve resistance to impact, fatigue, and environmental stress.

Workability: Requires careful mixing to prevent clumping or foam collapse.

CHAPTER 3

GEOMETRIC MODELLING

1. Overview

Geometry modelling refers to the process of defining the shape, size, and dimensions of structural elements to be tested or simulated. In civil engineering applications, it typically involves representing beams, slabs, or cubes in two or three dimensions for analysis.

In this study, geometry modelling has been employed both for:

Laboratory specimen preparation, and

Analytical modelling using design software (if applicable).

This approach allows for visualisation of how the bamboo reinforcement and alternative aggregates are distributed within the concrete matrix, ensuring precision during both casting and analysis.

1.1 Concept of Geometry Modelling

The experimental specimens were designed according to relevant Indian Standards (IS) codes. The Geometry of the specimens was selected to facilitate accurate testing of compressive, tensile, and flexural strength.

1. Selection of Structural Elements:

- Decide which elements to model, e.g., **beams, slabs, columns, or wall panels**.
- Choose sizes and shapes according to experimental design or standard codes.

2. Defining Material Properties:

- Input mechanical properties of materials:
- **Concrete with coconut shell aggregates**: compressive strength, density.
- **Bamboo reinforcement**: tensile strength, modulus of elasticity.
- **Glass fibers**: effect on tensile/flexural performance.

3. Geometric Representation:

- Create a 3D model of the structural element using CAD or modeling software.
- Include details like **reinforcement layout, fiber distribution, and aggregate placement**.

4. Simplifications:

- For simulation purposes, natural material irregularities (like bamboo nodes or coconut shell shapes) may be simplified to standard shapes.
- This allows easier computational analysis without losing essential behavior patterns.

5. Boundary Conditions and Loading:

- Define supports (simply supported, fixed, or cantilevered).
- Apply loads (uniform, point loads, or environmental loads) for simulation.

6. Analysis Goals:

- Evaluate **stress, strain, deflection, and crack patterns**.
- Determine the optimal proportion of bamboo, coconut shell, and glass fibers for structural efficiency.

3.3.1 Compressive Strength Specimens

Shape: Cube

Dimensions: 150 mm × 150 mm × 150 mm

Material Composition: Cement, fine aggregate, coarse aggregate (partially replaced with coconut shell and glass fibres), water, and bamboo reinforcement (if required for specific tests)

3.3.2 Flexural Strength Specimens

Shape: Beam

Dimensions: 100 mm × 100 mm × 500 mm

Reinforcement: Bamboo strips replacing steel rods partially or fully. Loading: Two-point loading system as per IS:516 (Part 1) – 2018.

3.3.3 Split Tensile Strength Specimens

Shape: Cylinder

Dimensions: 150 mm diameter × 300 mm height

Purpose: To determine tensile resistance of modified concrete mixes

3.4 Modelling of Aggregate Replacement

The replacement of conventional coarse aggregates with coconut shell and glass fibres required redefinition of the concrete matrix geometry. Coconut shell particles were represented as irregularly shaped aggregates with approximate sizes ranging from 10 mm to 20 mm. Glass fibres were incorporated as linear inclusions distributed uniformly throughout the concrete mix. These modifications ensured that the geometry accurately reflected the material composition, improving the reliability of simulation and experimental correlation.

3.5 Tools and Techniques Used

The geometry modelling and analysis process utilised the following tools:

AutoCAD / Solid Works – for developing 2D and 3D geometric models of specimens. ANSYS / STAAD.Pro (optional) – for finite element analysis and stress–strain simulation.

Manual drafting – for specimen preparation in laboratory testing. All geometric models were prepared with precision to ensure uniformity and reproducibility of results.

1. Importance of Fiber Distribution

- **Uniform Distribution:** Ensures maximum reinforcement and reduces weak zones.
- **Orientation of Fibers:** Fibers aligned along the tensile stress direction improve strength and toughness.
- **Clumping or Agglomeration:** Poor dispersion reduces effectiveness and may create localized weaknesses.
- **Effect on Foam Stability:** Excessive mixing to distribute fibers can break foam bubbles, affecting density.

3 Cement Matrix Modelling

Cement mix modeling is the process of designing and simulating the proportions of cement, water, aggregates, foam, and admixtures to achieve desired density, strength, workability, and durability. In LWFC, cement mix modeling is particularly important because the high air content from foams and fiber additions affect hydration, strength development, and flow properties.

1. Purpose of Cement Mix Modeling

- Predict mechanical properties like compressive, tensile, and flexural strength.
- Control density and porosity to achieve lightweight characteristics.
- Optimize workability for easy placement and uniform fiber distribution.
- Reduce material waste and cost.

2.3 Computational Techniques

Computational techniques are used to simulate, analyze, and optimize green construction properties such as density, strength, fiber distribution, pore structure, and thermal performance.

They help in reducing experimental trials, predicting behavior under load, and designing efficient, lightweight structures.

1. Applications of Computational Techniques

1. Mix Design Optimization

Simulation of cement, water, fiber, and aggregate proportions to achieve target density and strength. Techniques include Excel-based calculation, or genetic algorithms.

2. Mechanical Property Prediction

Finite Element Analysis (FEA) to predict:

- Compressive and tensile strength
- Flexural behavior
- Crack initiation and propagation

Useful for beam, slab, and block design in LWFC.

3.2 Conclusion

The study on green construction materials demonstrates that the partial replacement of conventional materials such as steel and aggregates with sustainable alternatives like bamboo, coconut shell, and glass fibres can significantly reduce the environmental impact of construction. Bamboo, being renewable and lightweight, offers impressive tensile strength comparable to mild steel, while coconut shell and glass fibres improve the strength, durability, and insulation properties of concrete. This approach not only promotes the utilisation of local, eco-friendly resources but also lowers construction costs and carbon emissions.

CHAPTER 4

EXPERIMENTAL RESULT

4.1 Design Procedure

The design procedure involves two main parts:

- **Concrete Mix Design** — with partial replacement of coarse aggregates by coconut shell and addition of glass fiber.
- **Structural Member Design** — with partial replacement of steel reinforcement by treated bamboo.

4.1.1 Concrete Mix Design Procedure

Code Reference: IS 10262:2019 (Concrete Mix Proportioning), IS 456:2000 (Plain and Reinforced Concrete).

Example Mix Ratio (by weight)

Material	M0 (Control)	M2 (20% CS + 1% GF)
Cement	1	1
Fine Aggregate	1.92	1.92
Coarse Aggregate	3.12	2.50
Coconut Shell	—	0.62
Water	0.45	0.45
Glass Fiber	—	0.01
Superplasticizer	—	0.009

4.1.2 Testing and Evaluation

After casting:

- **Curing:** 7, 14, 28 days.
- **Tests:**
 - Compressive Strength (cube)
 - Density and water absorption

Compare results with control concrete and determine the optimum replacement ratio.

Mix ID	% Replacement of Coarse Aggregate with Coconut Shell	% Glass Fiber (by cement weight)
M0	0%	0%
M1	10%	0.5%
M2	20%	1.0%
M3	30%	1.5%

T
a
b
l
e

6:- Mix Proportion

Concrete grade: **M20**
Curing period: 7; 14; **28 days**

Table 7:- Compressive Strength Test (Cube 150×150×150 mm)

Material	% of partially Replacement of aggregate	Compressive Strength (N/MM²)
Glass fiber	5	10.67
Coconut Shell	5	9.33

Material	% of partially Replacement of aggregate	Compressive Strength (N/MM²)
Glass fiber	10	9.77
Coconut Shell	10	8

Table 8:- Combination of both material (glass fiber & coconut shell)

Material	10% of partially Replacement of aggregate	Compressive Strength (N/MM²)
Coconut Shell	40	13.77
Glass fiber	60	13.77

Table 9 :- Property of Cement

Sr.No.	Property	IS CODE 8112
1	Specific gravity	3.122
2	Consistency	53
3	Initial setting time	30 min
4	Final setting time	10 hr

Table 10:- Density and Water Absorption

Mix ID	Density (kg/m³)	Water Absorption %
M0	2400	3.2
M1	2275	3.6
M2	2150	4.0
M3	2020	4.5

CHAPTER 5

CONCLUSION AND FUTURE SCOPE

1.1 Conclusions

The experimental investigation on sustainable construction materials using bamboo, coconut shell, and glass fiber demonstrates that eco-friendly alternatives can partially replace conventional materials without significantly compromising structural performance.

- **Compressive Strength:**

Concrete containing up to 20% replacement of coarse aggregates with coconut shell achieved an average 28-day compressive strength of 31 MPa, which is within acceptable limits for M25-grade concrete. Beyond this percentage, the reduction in strength became more pronounced.

- **Flexural and Tensile Strength:**

The inclusion of glass fiber (1% by weight of cement) improved tensile and flexural properties by reducing crack propagation and enhancing post-cracking behavior.

- **Density and Workability:**

Replacement of natural aggregates with coconut shell reduced the concrete's density by approximately 10%, producing a lightweight concrete suitable for low- to medium-load applications. Minor reductions in workability were mitigated with the use of a superplasticizer.

- **Sustainability Impact:**

The combination of bamboo, coconut shell, and glass fiber reduced the consumption of non-renewable materials such as steel and natural aggregates, leading to a lower carbon footprint, cost savings, and promotion of sustainable construction practices.

Future Scope

The experimental study has demonstrated the potential of coconut shell, and glass fiber as sustainable alternatives in construction materials. However, further research and development can expand their applicability and performance. The following areas outline the **future scope** of this work:

1. **Long-Term Durability Studies:**

Investigate the long-term behavior of coconut shell and glass fibre concrete under various environmental conditions such as moisture, temperature fluctuations, and chemical exposure. This includes studying durability parameters like water permeability, carbonation depth, and chloride attack resist durability parameters like water permeability, carbonation depth, and chloride attack resistance.

2 **Structural Applications and Modeling:**

Extend the study to full-scale **structural elements** such as slabs, columns, and footings, and perform **finite element analysis (FEA)** or computer modeling to predict load-bearing behavior and failure modes.

3 **Improvement in Workability and Bonding:**

Experiment with chemical admixtures and surface treatments to improve the **workability** of coconut shell concrete and **bonding** between concrete matrix.

4 **Life-Cycle Assessment (LCA):**

Conduct a detailed **environmental impact and cost-benefit analysis** to compare these green materials with conventional construction materials over the entire life cycle of the structure.

REFERENCES

- [1] Damodhara Reddy¹, I. V. Ramana Reddy² & S. Aruna Jyothy³, Associate Professor, Department Of Civil Engineering, Sri Venkateswara College of Engineering and Technology, Chittoor, Andhra Pradesh, India, Professor, Department of Civil Engineering, Sri Venkateswara University College of Engineering, Tirupati, Andhra Pradesh, India, Assistant Professor, Department of Civil Engineering, Sri Venkateswara University College of Engineering, Tirupati, Andhra Pradesh, India. (Jan, 2014)
- [2] Maninder Kaur, Manpreet Kaur,(2012), “A review on utilization of coconut shell as coarse aggregate in mass concrete”, International Journal of Applied Engineering Research, Vol. 7, No.11, pp 05-08
- [3] Damre Shraddha¹, Firake Hitali¹, Dode Pradeep¹, and Shrikant Varpe^{2,*}1Datta Meghe College of Engineering, Department of Civil Engineering, Mumbai University 2 Ambuja Cements Ltd, Mumbai
- [4] Amarnath Yerramalaa Ramachandrudu Cba, Structures and Materials laboratory Department of Civil Engineering, Intell Engineering College, Anantapur, India
- [5] Siti Aminah Bt Tukiman and Sabarudin Bin Mohammed, Faculty of Civil Engineering and Earth Resources, University Malasiya Pahang
- [6] K. Gunasekaran P.S Kumar, M. Lakshmi pathy, Department of Civil Engineering, Faculty of Engineering and Technology, University, Kattan kulathur, Tamil Nadu, India. Lightweight Concrete Using Coconut Shells as Aggregate Proceedings of the International Conference on “Innovations in Building Materials, Structural Designs and Construction Practices (IBMSDCP-2008), 15-17 May 2008, pp. 375-382

REFERED CODES ARE-

1. I.S 383-1970: “Specifications for coarse and fine aggregates”
2. I.S:456:2000 “Indian Standard: Plain and Reinforced Cement Concrete”
3. IS: 8112:1989 43 Grade Ordinary Portland Cement-Specification
4. I.S: 1199:1959
5. I.S: 516:1959
6. I.S: 383:2016
7. I.S: 2386:1963 (PART 1)
8. I.S: 2386:1963 (PART 2)
9. I.S: 2386:1963 (PART 3)
10. I.S: 2386:1963 (PART 4)



SOUVENIR **CIVITAS-2026**

Souvenir & Abstract Proceedings

1st National Conference

ON

SUSTAINABLE

**Civil Engineering & Geospatial Technologies:
Materials and Innovations For Climate Resilience**

(NCRT-SCE 2026)


15th- 16th April, 2026

Organized by

DEPARTMENT OF CIVIL ENGINEERING

BUDDHA INSTITUTE OF TECHNOLOGY

CL-1, Sector-7, GIDA, Gorakhpur, Uttar Pradesh, India

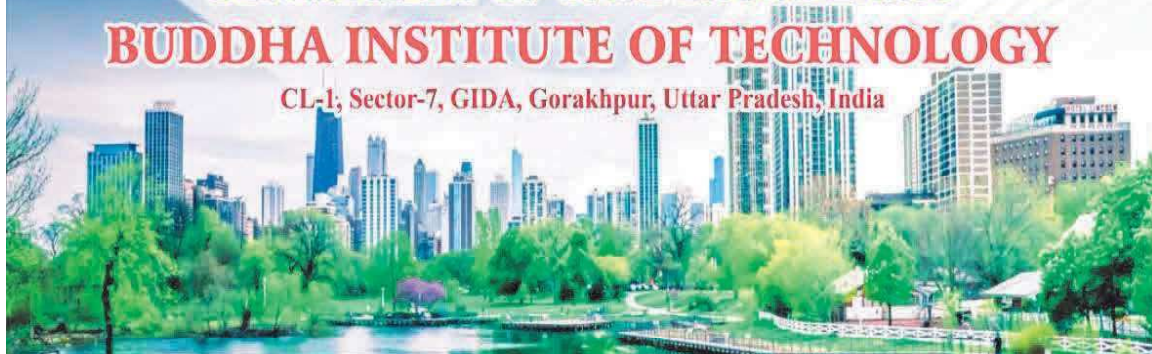

Shell fiber innovative concrete composites

Neha Yadav¹, Anshuman Singh², Aditya Rao³, Saurav Dubey⁴,

Mr. Rahul Shukla⁵

^{1,2,3,4}B. Tech. 4th year students, Department of Civil Engineering, Buddha Institute of Technology, Gorakhpur, UP, India

⁵Asst. Prof., Department of Civil Engineering, Buddha Institute of Technology, Gorakhpur, UP, India

bit23Ce125@bit.ac.in, bit22ce10@bit.ac.in, bit23Cell1@bit.ac.in, bit23Cell9@bit.ac.in,
rahul539@bit.ac.in

Abstract: Concrete is the most widely used construction material in the world, however, conventional concrete has limitations such as low tensile strength, brittleness, and susceptibility to cracking. To overcome these limitations and promote sustainable construction practices, the use of natural fibers in concrete has gained significant attention. Shell fiber, obtained from agricultural or natural shell waste materials, has emerged as an innovative reinforcement material for concrete composites. This study focuses on the experimental investigation of shell fiber as an additive in concrete to improve its mechanical and durability properties. Different proportions of shell fiber were incorporated into the concrete mix and tested for compressive strength, tensile strength, and flexural strength. The results indicated that the inclusion of shell fiber enhanced crack resistance, ductility, and overall strength characteristics of the concrete. In addition, the use of shell fiber contributes to waste utilization and environmental sustainability by reducing dependency on synthetic materials. The findings of this research demonstrate that shell fiber reinforced concrete can be considered an innovative and eco-friendly composite material suitable for modern construction application. Concrete remains the most widely used construction material in the world due to its strength, durability, and versatility. However, conventional concrete has limitations such as brittleness, low tensile strength, and environmental concerns related to the extraction of natural aggregates and the high carbon footprint of cement production. In recent years, researchers have explored sustainable alternatives and performance-enhancing additives to overcome these limitations. One promising approach is the development of shell-fiber innovative concrete composites, which combine waste shell materials with reinforcing fibers to improve both mechanical performance and environmental sustainability. Shell materials, such as oyster shells, clam shells, and other marine or agricultural shell wastes, are increasingly recognized as valuable substitutes for natural aggregates or fillers in concrete. These shells are primarily composed of calcium carbonate, which makes them chemically compatible with cementitious matrices.

When processed and crushed into suitable particle sizes, shell materials can partially replace fine or coarse aggregates in concrete. This substitution helps reduce the demand for natural resources like sand and gravel while also addressing waste disposal problems associated with shell industries. Additionally, the rough and irregular surface texture of shell particles can improve the bonding between aggregates and cement paste, contributing to better interfacial strength. Fibers play a crucial role in enhancing the mechanical behavior of concrete composites. Various types of fibers, including steel fibers, polypropylene fibers, glass fibers, and natural fibers such as coconut coir or jute, can be incorporated into the concrete mix. These fibers act as micro-reinforcement within the cement matrix, controlling crack propagation and improving the tensile strength, ductility, and impact resistance of the material. By bridging micro-cracks that develop under loading, fibers prevent sudden brittle failure and significantly enhance the durability and toughness of the concrete. The integration of shell aggregates with fiber reinforcement creates a synergistic composite material with improved structural performance. Shell particles contribute to sustainability and cost efficiency, while fibers enhance the mechanical and durability properties of the composite. Experimental studies have demonstrated that shell–fiber concrete composites can exhibit improved compressive strength, flexural strength, and resistance to cracking compared to conventional concrete when the mix proportions are optimized. Furthermore, these composites show potential for better resistance to environmental degradation, including abrasion, freeze–thaw cycles, and chemical attack. Another important advantage of shell–fiber concrete composites is their contribution to sustainable construction practices. The use of waste shells reduces landfill accumulation and promotes recycling of marine and agricultural by-products. At the same time, the incorporation of fibers allows for thinner structural elements and longer service life, which ultimately reduces material consumption and maintenance costs. This aligns with the global emphasis on environmentally responsible construction and the development of green building materials. In conclusion, shell–fiber innovative concrete composites represent a promising advancement in sustainable construction technology. By combining recycled shell materials with fiber reinforcement, this composite material addresses both environmental and structural challenges associated with traditional concrete. Continued research is necessary to optimize mix design, evaluate long-term durability, and develop standardized guidelines for large-scale applications. With further development, shell–fiber concrete composites have the potential to play a significant role in future infrastructure projects, contributing to stronger, more durable and environmentally friendly construction materials.

Keywords: shell fiber, fiber reinforced concrete, innovative concrete composites, sustainable construction, mechanical properties.



IEEE
SYM-BIT
Gorakhpur

National Conference

ON



**Sustainable Civil Engineering & Geospatial Technologies:
Materials & Innovations for Climate Resilience
(NCRT-SCE 2026)**

Date: 15th - 16th April, 2026

Organized by

BUDDHA INSTITUTE OF TECHNOLOGY, GORAKHPUR

DEPARTMENT OF CIVIL ENGINEERING

Certificate of Presentation

This is to certify that Ms./Mr./Dr. Aditya Rao Year 1th
Branch: CIVIL Engg. has presenting the paper/abstract titled Shell Fiber Innovative
Concrete Composites

the "National Conference on Sustainable Civil Engineering & Geospatial Technologies: Materials & Innovations for Climate Resilience (NCRT-SCE 2026)" held from 15th to 16th April, 2026.

We congratulate the participant for outstanding performance and contribution.

Mr. Pratish Kannaujiya
Organizing Secretary

Mr. Ankur Kumar
Joint Organizing Secretary

Mr. Baijnath Nishad
Conference Convener

Prof. (Dr.) Roop Ranjan
Conference Chair



National Conference

ON

**Sustainable Civil Engineering & Geospatial Technologies:
Materials & Innovations for Climate Resilience
(NCRT-SCE 2026)**

Date: 15th - 16th April, 2026

Organized by

BUDDHA INSTITUTE OF TECHNOLOGY, GORAKHPUR **DEPARTMENT OF CIVIL ENGINEERING** **Certificate of Presentation**

This is to certify that Ms./Mr./Dr. Saurav Dubey Year 4th
Branch: Civil Engg. has presenting the paper/abstract titled. "Shell Fibre Innovative
concrete composites"

the "National Conference on Sustainable Civil Engineering & Geospatial Technologies: Materials & Innovations for Climate Resilience (NCRT-SCE 2026)" held from 15th to 16th April, 2026.

We congratulate the participant for outstanding performance and contribution.


Mr. Pratish Kannaujia
Organizing Secretary


Mr. Ankur Kumar
Joint Organizing Secretary


Mr. Baijnath Nishad
Conference Convener


Prof. (Dr.) Roop Ranjan
Conference Chair



