


123456

A

A

B

B

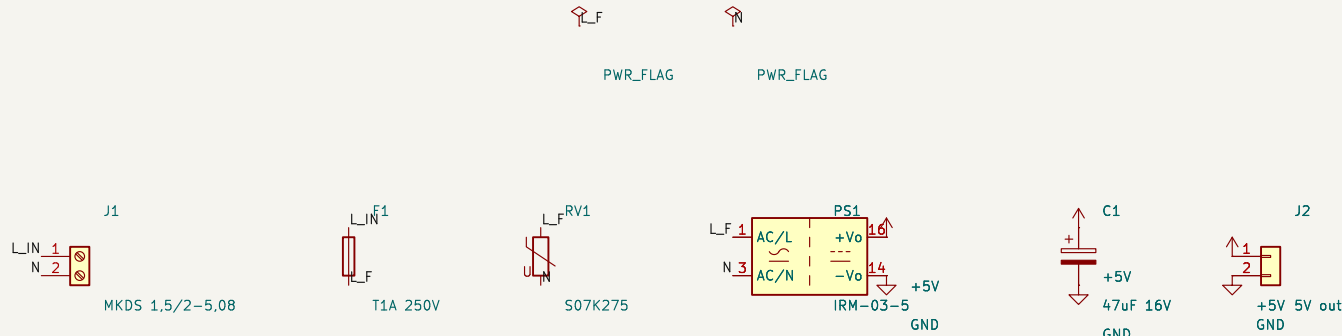

PSU carrier for the smart wall plate (see pcb/SPEC.md, docs/SAFETY.md).
J1 is fed from the LOAD side of the emergency rocker + neutral (pigtail).
The 15 A lighting path never runs on this PCB.
F1 rating T1A is a designer's choice (Mean Well gives none; IRM-03 inrush 20 A typ @230 VAC): HUMAN REVIEW.
Isolation targets (not a compliance claim): PRI-SEC >= 6.0 mm creepage/clearance with routed slot.
L-N >= 2.5 mm, no copper within 2 mm of the rail edges. Enforced by psu_carrier.kicad_dru.
PS1 pinout per <https://www.meanwell.com/Upload/PDF/IRM-03/IRM-03-SPEC.PDF> (2025-08-08): 1=AC/L, 3=AC/N, 14=-Vo, 16=+Vo, 5=NC.

C

C

D

D

Generated by pcb/tools/gen_schematic.py – edit parts.py, not this file NOT certified. Design targets only – human review before fab. smart-wallplate		
Sheet: / File: psu_carrier.kicad_sch		
Title: Smart wall plate – PSU carrier		
Size: A4	Date: 2026-10-06	Rev: v0.2
KiCad E.D.A. 9.0.9		Id: 1/1

123456