REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

175 m³/h	3.2 psi	−3.0 psi	0.83–1.5 kW	64 dB(A)	13–17 kg
103 CFM	0.22 bar	−0.21 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0140-1MT700-6	0.83	220-275 Δ / 380-480 Y	3.75 Δ / 2.15 Y	175 m³/h (103 CFM)	−1.9 psi (−0.13 bar)	1.9 psi (0.13 bar)	64	13
STRC0140-1MA800-1	0.9	230	5.8	175 m³/h (103 CFM)	−2.3 psi (−0.16 bar)	2.0 psi (0.14 bar)	64	15
STRC0140-1MT850-6	0.95	220-275 Δ / 380-480 Y	4.0 Δ / 2.3 Y	175 m³/h (103 CFM)	−2.3 psi (−0.16 bar)	2.3 psi (0.16 bar)	64	16
STRC0140-1MA111-1	1.3	230	8.3	175 m³/h (103 CFM)	−2.6 psi (−0.18 bar)	2.8 psi (0.19 bar)	64	16
STRC0140-1MT131-6	1.5	220-275 Δ / 380-480 Y	5.7 Δ / 3.3 Y	175 m³/h (103 CFM)	−3.0 psi (−0.21 bar)	3.2 psi (0.22 bar)	64	17

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

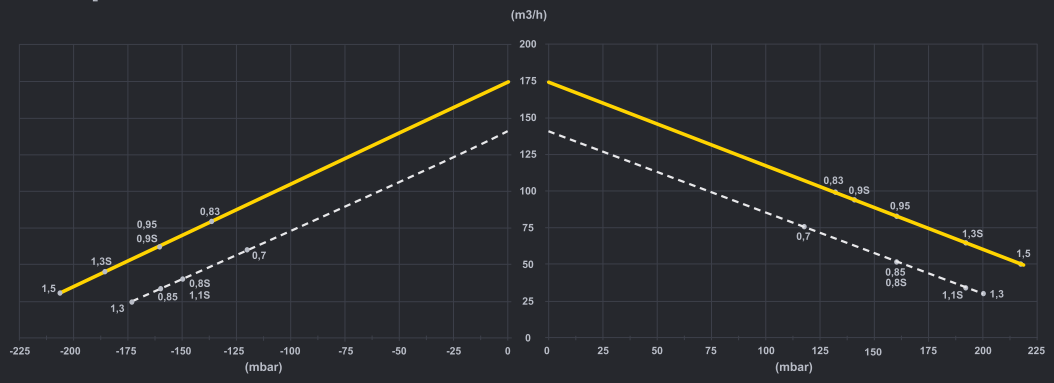


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz


COMPRESSION →

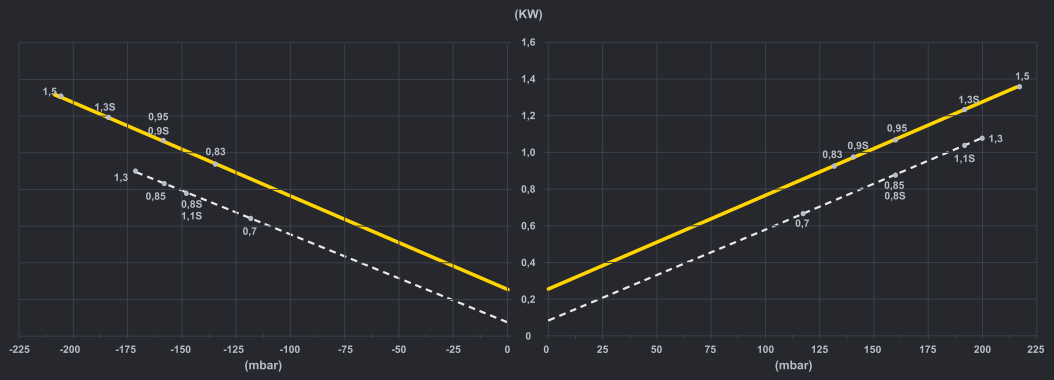

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

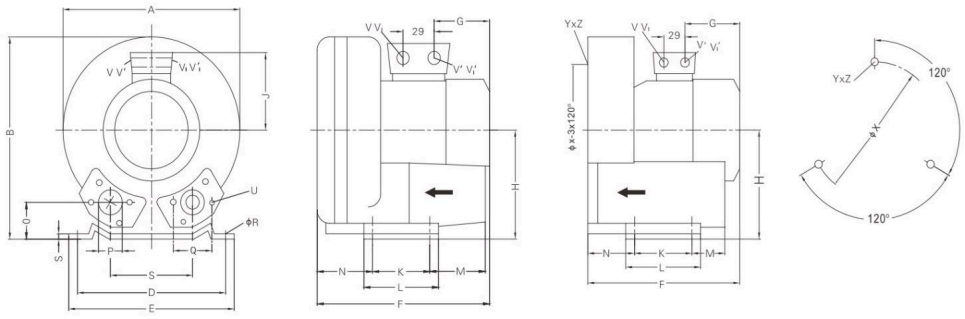

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX
STRC0140-1MT700-6	286	302	115	225	225	269	129	154	111	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0140-1MA800-1	286	302	115	225	225	294	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0140-1MT850-6	286	302	115	225	225	292	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0140-1MA111-1	286	302	115	225	225	294	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0140-1MT131-6	286	302	115	225	225	292	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com