REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

250 m³/h	4.2 psi	−3.8 psi	0.95–2.55 kW	70 dB(A)	20–25 kg
147 CFM	0.29 bar	−0.26 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0210-1MT850-6	0.95	220-275 Δ / 380-480 Y	4.0 Δ / 2.3 Y	250 m³/h (147 CFM)	−1.2 psi (−0.08 bar)	1.0 psi (0.07 bar)	70	20
STRC0210-1MA111-1	1.3	230	8.3	250 m³/h (147 CFM)	−2.2 psi (−0.15 bar)	2.3 psi (0.16 bar)	70	21
STRC0210-1MT131-6	1.5	220-275 Δ / 380-480 Y	5.7 Δ / 3.3 Y	250 m³/h (147 CFM)	−2.2 psi (−0.15 bar)	2.0 psi (0.14 bar)	70	22
STRC0210-1MA151-1	1.75	230	10	250 m³/h (147 CFM)	−2.6 psi (−0.18 bar)	2.6 psi (0.18 bar)	70	24
STRC0210-1MT161-6	2.05	220-275 Δ / 380-480 Y	7.6 Δ / 4.4 Y	250 m³/h (147 CFM)	−3.2 psi (−0.22 bar)	3.0 psi (0.21 bar)	70	23
STRC0210-1MT221-6	2.55	220-275 Δ / 380-480 Y	9.0 Δ / 5.3 Y	250 m³/h (147 CFM)	−3.8 psi (−0.26 bar)	4.2 psi (0.29 bar)	70	25

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

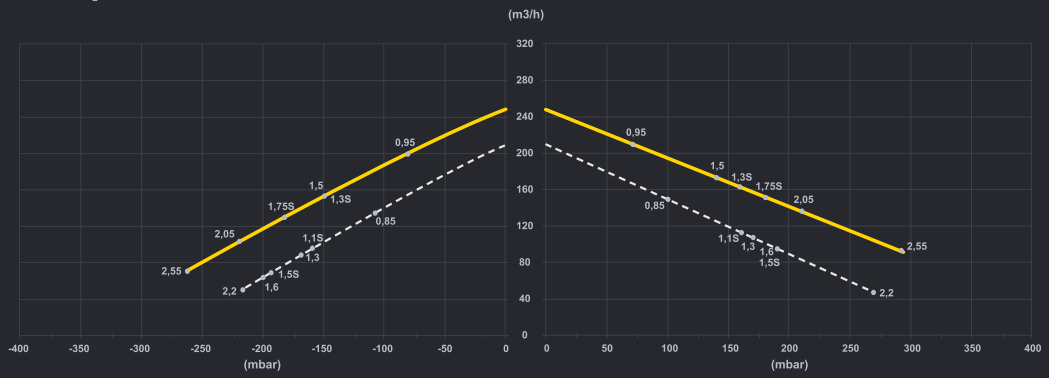


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz


COMPRESSION →

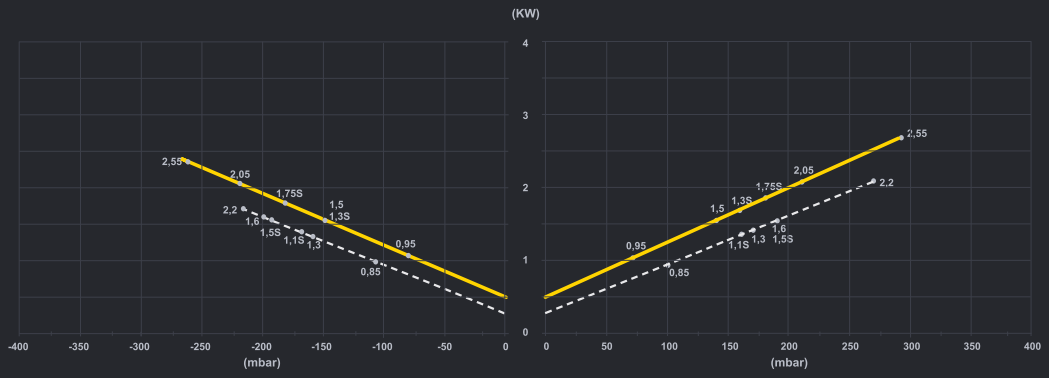

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

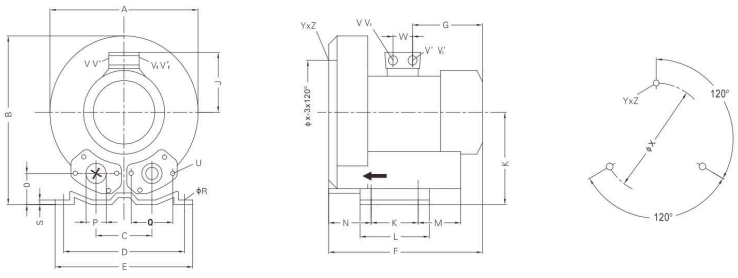

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX	W
STRC0210-1MT850-6	334	337	120	260	295	314	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MA111-1	334	337	120	260	295	314	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MT131-6	334	337	120	260	295	314	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MA151-1	334	337	120	260	295	345	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MT161-6	334	337	120	260	295	346	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0210-1MT221-6	334	337	120	260	295	346	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com