REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

325 m³/h	3.0 psi	−3.3 psi	1.5–2.55 kW	71 dB(A)	23–26 kg
191 CFM	0.21 bar	−0.23 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0270-1MT131-6	1.5	220-275 Δ / 380-480 Y	5.7 Δ / 3.3 Y	325 m³/h (191 CFM)	−1.0 psi (−0.07 bar)	0.73 psi (0.05 bar)	71	23
STRC0270-1MA151-1	1.75	230	10	325 m³/h (191 CFM)	−1.6 psi (−0.11 bar)	1.5 psi (0.10 bar)	71	26
STRC0270-1MT161-6	2.05	220-275 Δ / 380-480 Y	7.6 Δ / 4.4 Y	325 m³/h (191 CFM)	−2.2 psi (−0.15 bar)	1.9 psi (0.13 bar)	71	24
STRC0270-1MT221-6	2.55	220-275 Δ / 380-480 Y	9.0 Δ / 5.3 Y	325 m³/h (191 CFM)	−3.3 psi (−0.23 bar)	3.0 psi (0.21 bar)	71	26

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

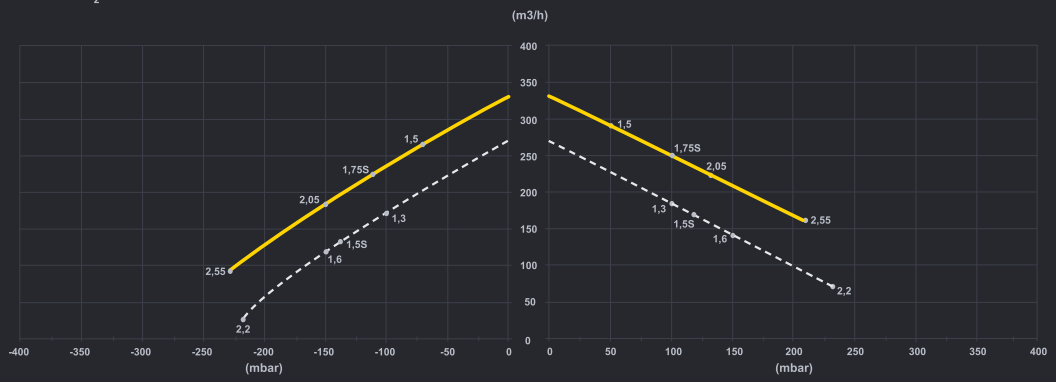


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz


COMPRESSION →

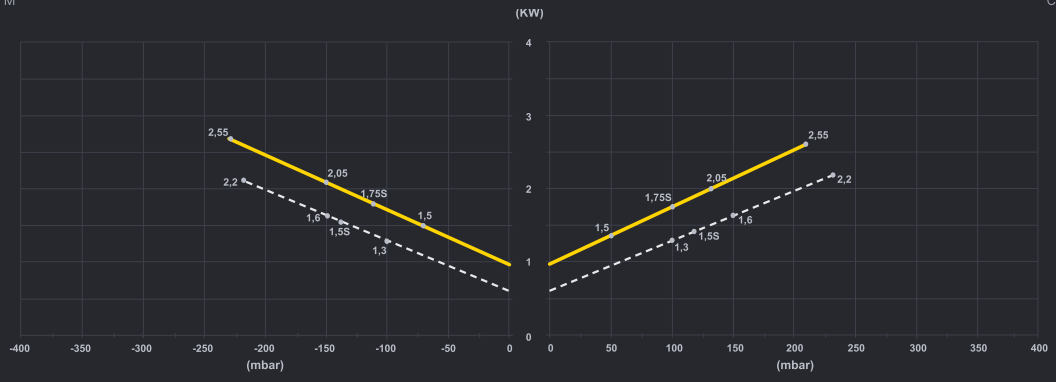

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

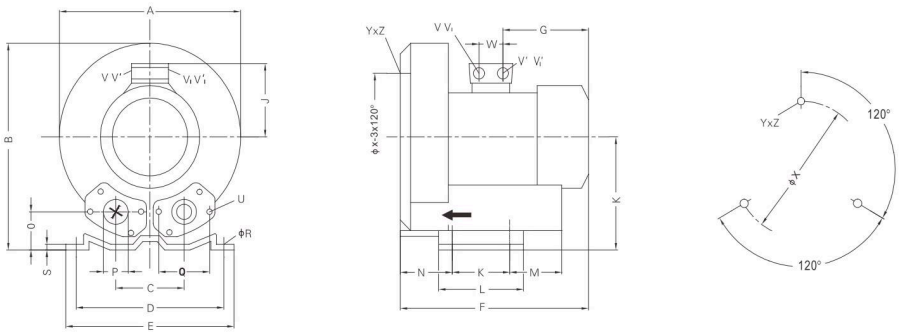

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX	W
STRC0270-1MT131-6	334	337	120	260	295	334	156	175	120	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0270-1MA151-1	334	337	120	260	295	365	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0270-1MT161-6	334	337	120	260	295	365	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29
STRC0270-1MT221-6	334	337	120	260	295	365	191	175	128	115	155	96	87	48	G 2"	83	14	4	M8 × 17	M25 × 1.5	M16 × 1.5	M8 × 20	0/120°/240°	200	29

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com