REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.



Vacuum or pressure · Continuous duty

375 m³/h	9.4 psi	−6.4 psi	2.55–8.6 kW	76 dB(A)	43–73 kg
221 CFM	0.65 bar	−0.44 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0315-2ST221-6	2.55	220-275 Δ / 380-480 Y	10.3 Δ / 6.0 Y	375 m³/h (221 CFM)	−2.5 psi (−0.17 bar)	2.2 psi (0.15 bar)	76	43
STRC0315-2ST301-6	3.45	220-275 Δ / 380-480 Y	12.6 Δ / 7.3 Y	375 m³/h (221 CFM)	−3.3 psi (−0.23 bar)	2.9 psi (0.20 bar)	76	48
STRC0315-2ST431-7	4.8	380-480 Δ / 660-720 Y	10.4 Δ / 6.0 Y	375 m³/h (221 CFM)	−4.6 psi (−0.32 bar)	4.8 psi (0.33 bar)	76	54
STRC0315-2ST551-7	6.3	380-480 Δ / 660-720 Y	13.3 Δ / 7.7 Y	375 m³/h (221 CFM)	−6.4 psi (−0.44 bar)	5.9 psi (0.41 bar)	76	66
STRC0315-2ST751-7	8.6	380-480 Δ / 660-720 Y	17.3 Δ / 10.0 Y	375 m³/h (221 CFM)	−6.4 psi (−0.44 bar)	9.4 psi (0.65 bar)	76	73

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

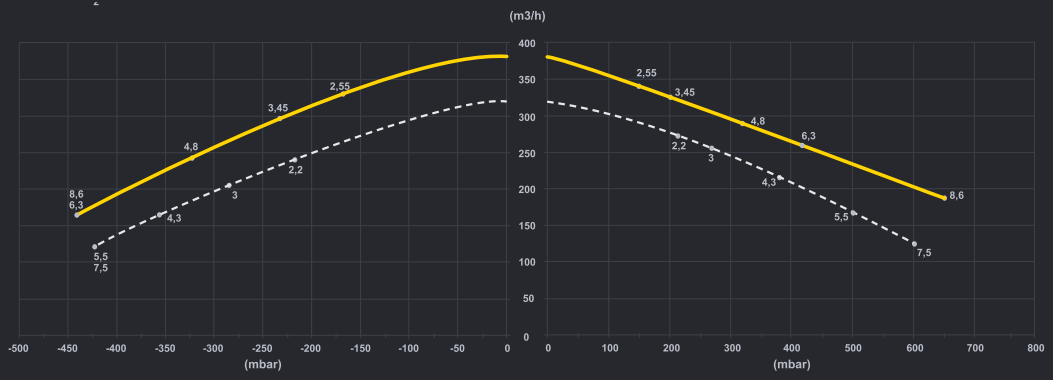


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz


COMPRESSION →

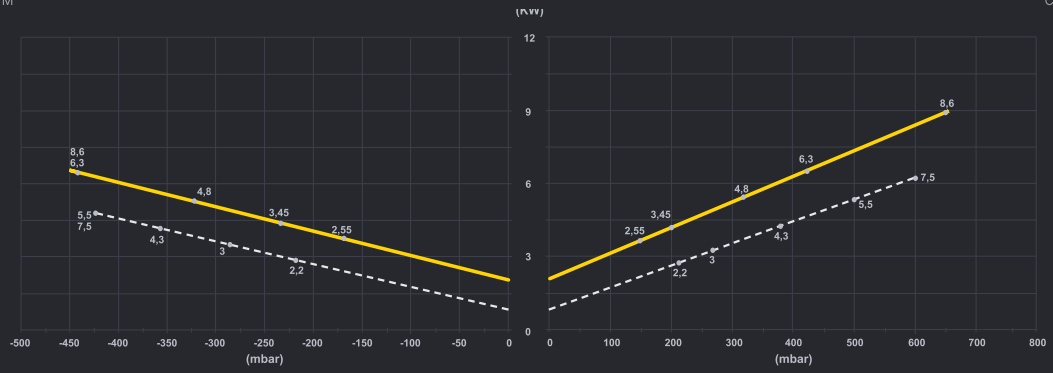

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

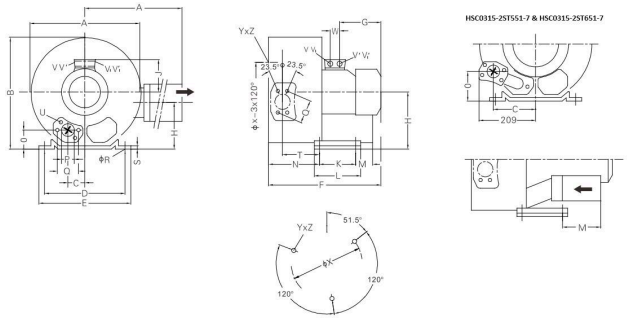

Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes	W
STRC0315-2ST221-6	426	426	420	63	290	325	473	185	197	162	128	140	180	84	205	53	G 2"	83	15	4.5	130	M8 × 17	M25 × 1.5	M16 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	29
STRC0315-2ST301-6	426	426	420	63	290	325	507	180	197	162	135	140	180	84	205	53	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42
STRC0315-2ST431-7	426	426	420	63	290	325	526	209	197	162	148	140	180	84	205	53	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42
STRC0315-2ST551-7	426	426	420	154	290	325	571	226	197	162	167	140	180	225	205	94	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42
STRC0315-2ST751-7	426	426	420	154	290	325	571	226	197	162	167	140	180	225	205	94	G 2"	83	15	4.5	130	M8 × 17	M32 × 1.5	M32 × 1.5	240	M10 × 20	51.5°/171.5°/291.5°	42

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com