REGENERATIVE BLOWER · SINGLE STAGE

# Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

| 620 m³/h | 5.8 psi | −5.1 psi | 4.6–8.6 kW | 74 dB(A) | 54–66 kg |
|---|---|---|---|---|---|
| 365 CFM | 0.40 bar | −0.35 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz

## TECHNICAL DATA

| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| Single stage | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |

## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRC0530-1MT401-7** | 4.6 | 380-480 Δ / 660-720 Y | 9.0 Δ / 5.2 Y | 620 m³/h<br>365 CFM | −2.3 psi<br>−0.16 bar | 2.3 psi<br>0.16 bar | 74 | 54 |
| **STRC0530-1MT551-7** | 6.3 | 380-480 Δ / 660-720 Y | 13.3 Δ / 7.7 Y | 620 m³/h<br>365 CFM | −4.4 psi<br>−0.30 bar | 4.1 psi<br>0.28 bar | 74 | 63 |
| **STRC0530-1MT751-7** | 8.6 | 380-480 Δ / 660-720 Y | 17.3 Δ / 10.0 Y | 620 m³/h<br>365 CFM | −5.1 psi<br>−0.35 bar | 5.8 psi<br>0.40 bar | 74 | 66 |

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


## PERFORMANCE CURVES

### FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

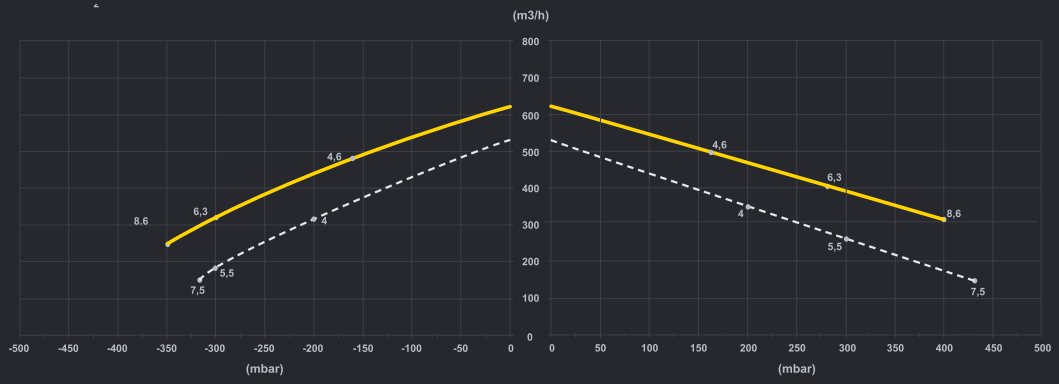



### POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz


COMPRESSION →

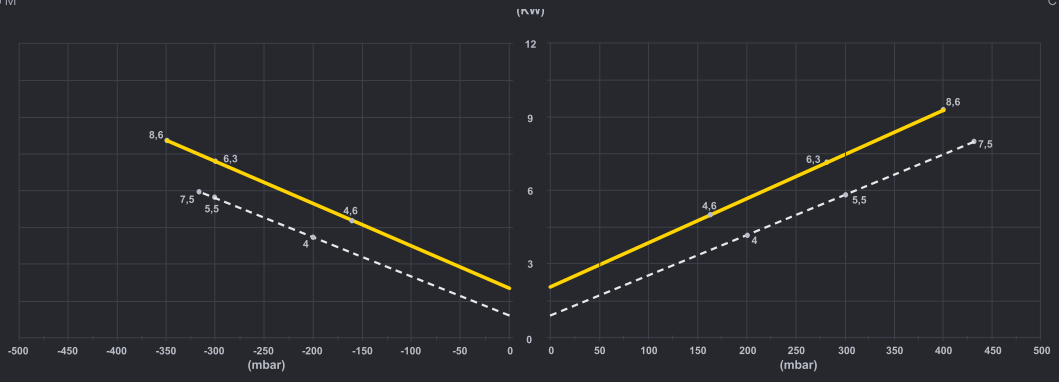


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

## DIMENSIONS

All dimensions in mm

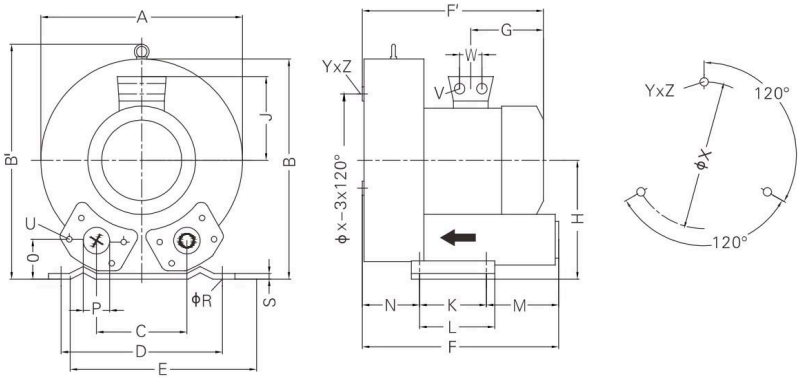


| Type | A | B | B' | C | D | E | F | F' | G | H | J | K | L | M | N | O | P | ϕR | S | V | W | ϕX | Y_Z | X-Holes |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STRC0530-1MT401-7 | 451 | 461 | 509 | 152 | 356 | 433 | 433 | 450 | 230 | 240 | 148 | 170 | 217 | 140 | 124 | 65 | G 2 1/2" | 15 | 6 | 4 x M32 × 1.5 | 42 | 286 | M12 × 20 | 0/120°/240° |
| STRC0530-1MT551-7 | 451 | 461 | 509 | 152 | 356 | 433 | 433 | 477 | 247 | 240 | 148 | 170 | 217 | 140 | 124 | 65 | G 2 1/2" | 15 | 6 | 4 x M32 × 1.5 | 42 | 286 | M12 × 20 | 0/120°/240° |
| STRC0530-1MT751-7 | 451 | 461 | 509 | 152 | 356 | 433 | 433 | 477 | 247 | 240 | 148 | 170 | 217 | 140 | 124 | 65 | G 2 1/2" | 15 | 6 | 4 x M32 × 1.5 | 42 | 286 | M12 × 20 | 0/120°/240° |

**Let's size your blower.**

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com