
REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.

Vacuum or pressure · Continuous duty

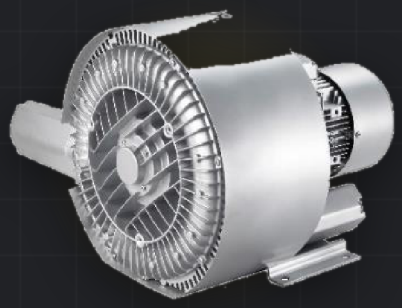

1 250 m³/h	7.8 psi	−6.5 psi	14.5–29 kW	87 dB(A)	187–211 kg
736 CFM	0.54 bar	−0.45 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC1050-2ST122-7	14.5	380-480 Δ / 660-720 Y	29.0 Δ / 16.7 Y	1 250 m³/h (736 CFM)	−3.2 psi (−0.22 bar)	2.9 psi (0.20 bar)	87	187
STRC1050-2ST165-7	19	380-480 Δ / 660-720 Y	36.5 Δ / 21.0 Y	1 250 m³/h (736 CFM)	−4.9 psi (−0.34 bar)	4.4 psi (0.30 bar)	84	197
STRC1050-2ST202-7	23	380-480 Δ / 660-720 Y	42.0 Δ / 24.2 Y	1 250 m³/h (736 CFM)	−6.4 psi (−0.44 bar)	6.2 psi (0.43 bar)	84	204
STRC1050-2ST252-7	29	380-480 Δ / 660-720 Y	52.0 Δ / 30.0 Y	1 250 m³/h (736 CFM)	−6.5 psi (−0.45 bar)	7.8 psi (0.54 bar)	84	211

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

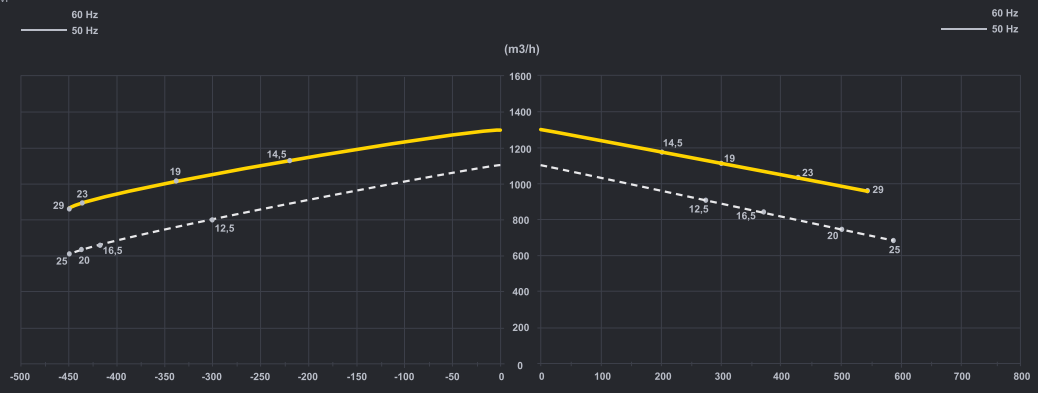


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz


COMPRESSION →

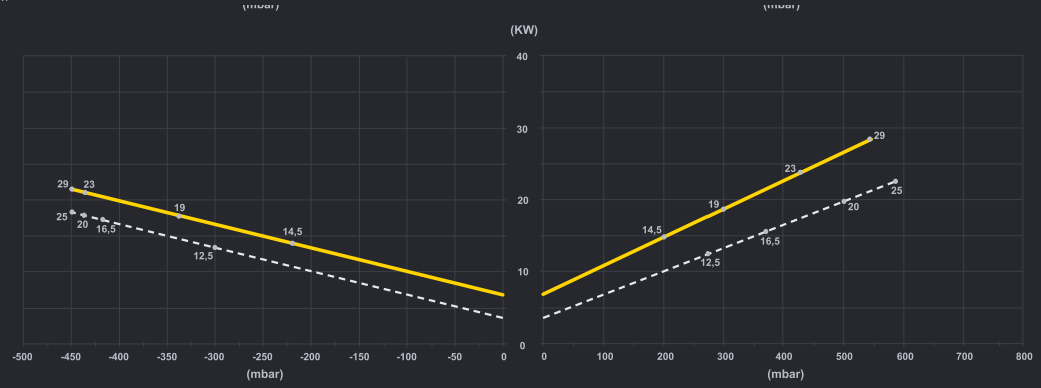

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

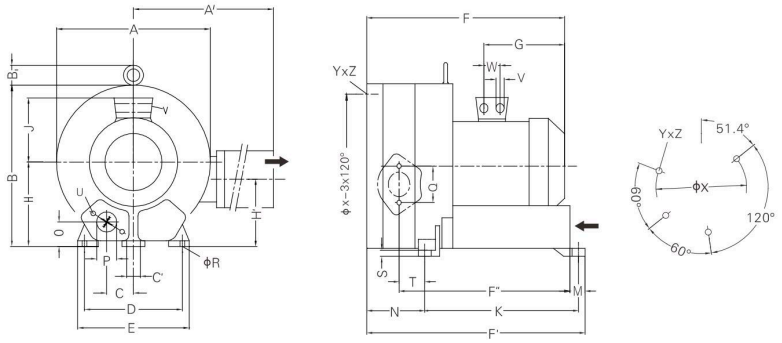

Type	A	A'	B	B'	C	C'	D	E	F	F'	F''	G	H	H'	J	K	M	N	O	ΦP	Q	ΦR	S	T	U	V	W	ΦX	Y_Z	X-Holes
STRC1050-2ST122-7	615	780	607	55	103.5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°
STRC1050-2ST165-7	615	780	607	55	103.5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°
STRC1050-2ST202-7	615	780	607	55	103.5	15	360	415	752	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°
STRC1050-2ST252-7	615	780	607	55	103.5	15	360	415	812	786	634	345	300	236	197	533	39	230	92	100	150	15	21	117	M12 × 30	4 x M40 × 1.5	54	490	M12 × 20	51°/120°/240°

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com