HIGH-PERFORMANCE BLOWER · 3 STAGES IN SERIES

# High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



| 147 m³/h | 14.9 psi | −9.3 psi | 4.6–6.3 kW | 73 dB(A) | 62–68 kg |
|---|---|---|---|---|---|
| 87 CFM | 1.03 bar | −0.64 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz

## TECHNICAL DATA

| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| 3 stages, series | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |


## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRP0120-3ST401-7** | 4.6 | 380-480 Δ / 660-720 Y | Δ 9.5 / Y 4.5 | 147 m³/h<br>87 CFM | −9.3 psi<br>−0.64 bar | 10.6 psi<br>0.73 bar | 73 | 62 |
| **STRP0120-3ST551-7** | 6.3 | 380-480 Δ / 660-720 Y | Δ 13.3 / Y 7.7 | 147 m³/h<br>87 CFM | −9.3 psi<br>−0.64 bar | 14.9 psi<br>1.03 bar | 73 | 68 |


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

## PERFORMANCE CURVES

### FLOW VS PRESSURE

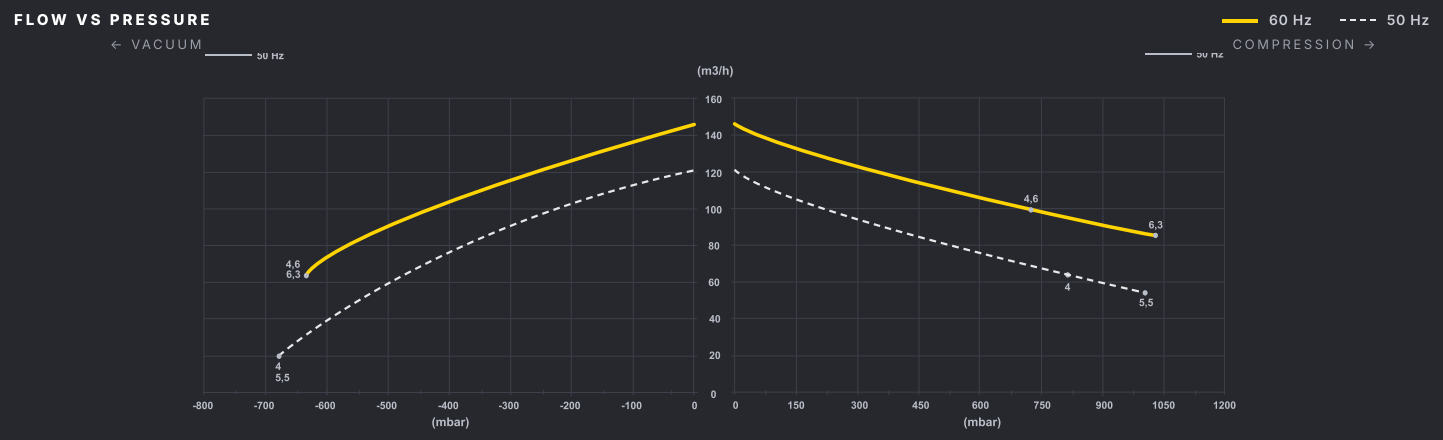



### POWER VS PRESSURE

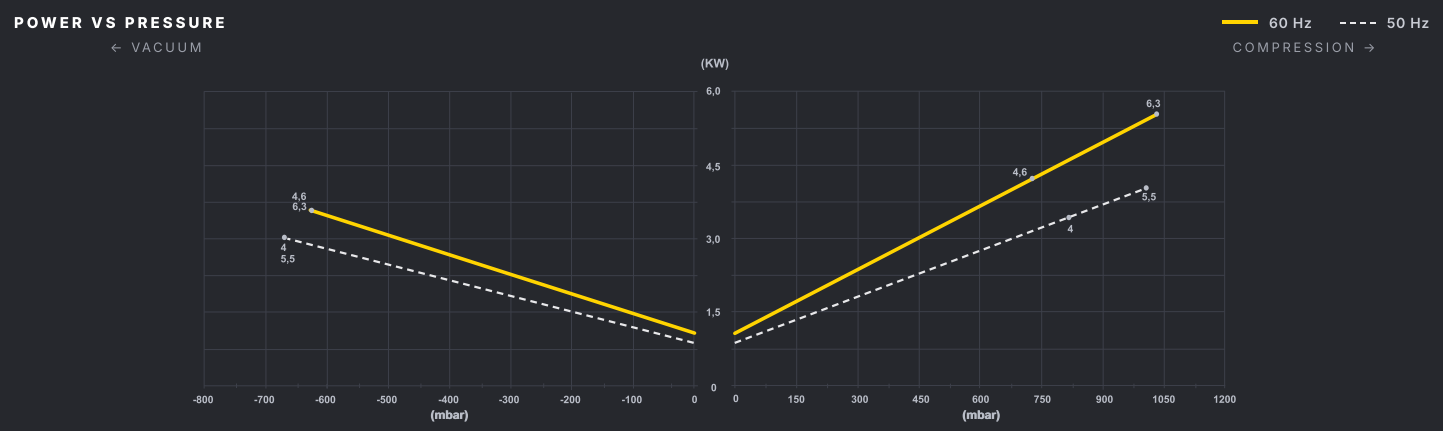


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

## DIMENSIONS

All dimensions in mm

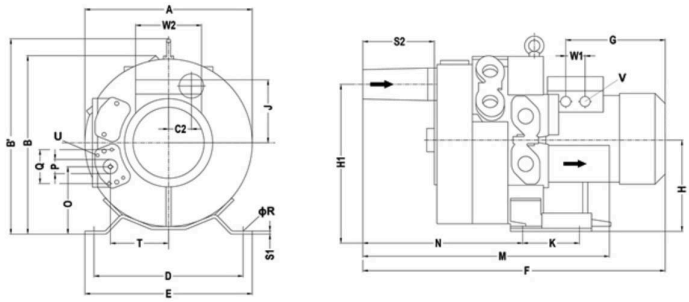


| Type | A | B | B′ | C2 | D | E | F | G | H | H1 | J | K | M | N | O | P |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STRP0120-3ST401-7 | 387 | 402 | 432 | 57 | 328 | 363 | 682 | 252 | 206 | 344 | 148 | 152 | 532 | 333 | 149 | G1 ¼″ |
| STRP0120-3ST551-7 | 442 | 402 | 432 | 63 | 371 | 406 | 717 | 274 | 236 | 389 | 148 | 152 | 539 | 336 | 172 | G1 ¼″ |

| Type | Q | ØR | S1 | S2 | T | U | V | W1 | W2 |
|---|---|---|---|---|---|---|---|---|---|
| STRP0120-3ST401-7 | 64 | 14 | 5 | 143 | 137 | M6 × 17 | M32 × 1.5 | 42 | 120 |
| STRP0120-3ST551-7 | 64 | 14 | 5 | 146 | 153 | M6 × 17 | M32 × 1.5 | 42 | 120 |

**Let's size your blower.**
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com