HIGH-PERFORMANCE BLOWER · 3 STAGES IN SERIES

# High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

| 200 m³/h (118 CFM) | 15.1 psi (1.04 bar) | −10.2 psi (−0.70 bar) | 8.6 kW | 76 dB(A) | 86 kg |
|---|---|---|---|---|---|
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz

## TECHNICAL DATA

| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| 3 stages, series | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |


## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRP0165-3ST751-7** | 8.6 | 380-480 Δ / 660-720 Y | Δ 16.0 / Y 8.0 | 200 m³/h (118 CFM) | −10.2 psi (−0.70 bar) | 15.1 psi (1.04 bar) | 76 | 86 |


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

## PERFORMANCE CURVES

### FLOW VS PRESSURE

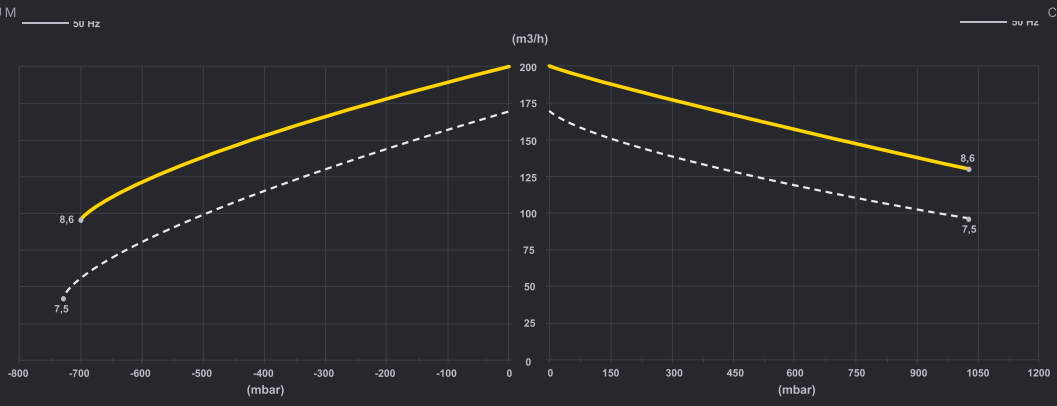



### POWER VS PRESSURE

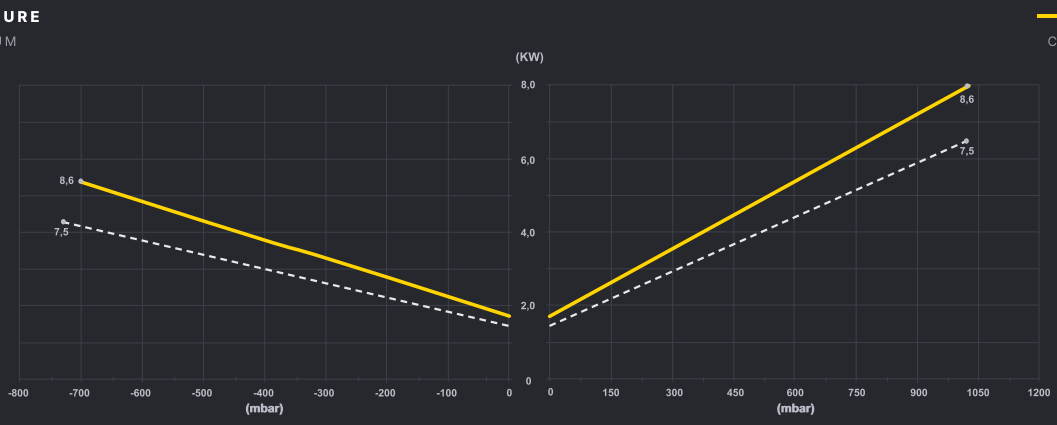


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

## DIMENSIONS

All dimensions in mm

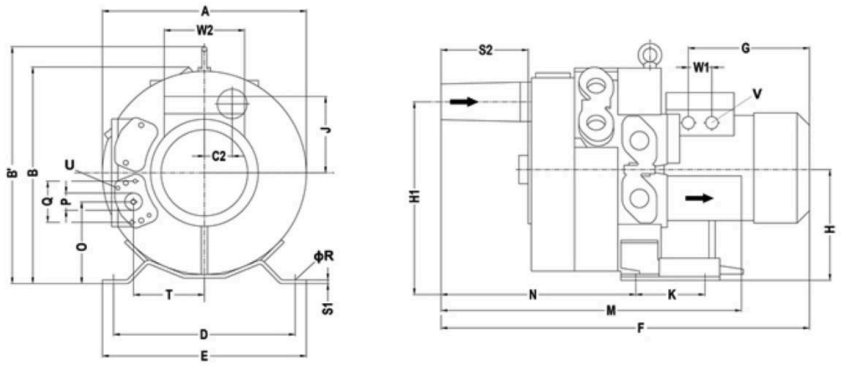


| Type | A | B | B' | C2 | D | E | F | G | H | H1 | J | K | M | N | O | P |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STRP0165-3ST751-7 | 442 | 402 | 492 | 63 | 371 | 406 | 717 | 274 | 236 | 389 | 167 | 152 | 539 | 336 | 172 | G1 ¼" |

| Type | Q | ØR | S1 | S2 | T | U | V | W1 | W2 |
|---|---|---|---|---|---|---|---|---|---|
| STRP0165-3ST751-7 | 64 | 14 | 5 | 146 | 153 | M6 × 17 | M32 × 1.5 | 42 | 120 |

**Let's size your blower.**
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com