REGENERATIVE BLOWER · SINGLE STAGE

# Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

| 100 m³/h | 2.3 psi | −2.2 psi | 0.28–0.5 kW | 56 dB(A) | 9–11 kg |
|---|---|---|---|---|---|
| 59 CFM | 0.16 bar | −0.15 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz


| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| Single stage | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |

## PERFORMANCE CURVES

### FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

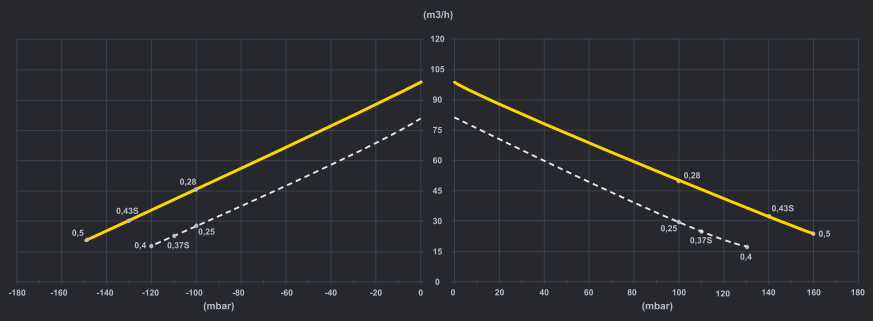


### POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

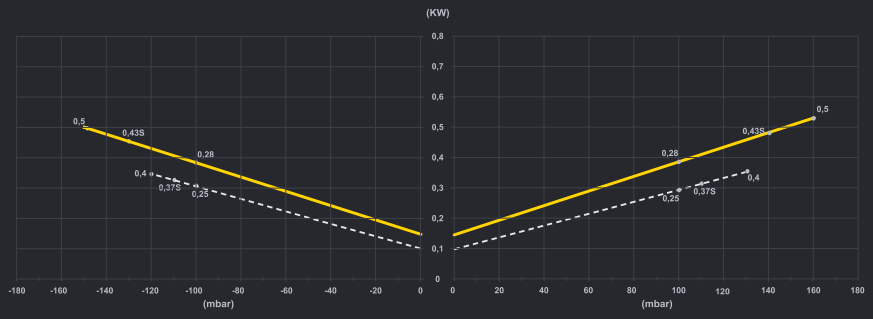


### TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

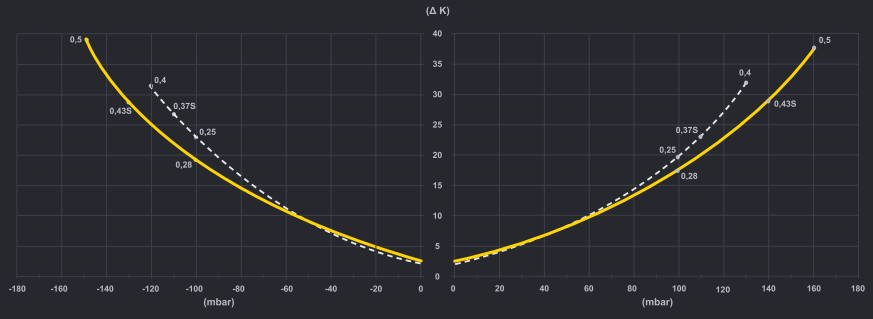


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.


## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRC0080-1MT250-6** | 0.28 | 220-275 Δ / 380-480 Y | 2.0 Δ / 1.15 Y | 100 m³/h<br>59 CFM | −1.5 psi<br>−0.10 bar | 1.5 psi<br>0.10 bar | 56 | 9 |
| **STRC0080-1MA370-1** | 0.43 | 230 | 3 | 100 m³/h<br>59 CFM | −1.9 psi<br>−0.13 bar | 2.0 psi<br>0.14 bar | 56 | 11 |
| **STRC0080-1MT400-6** | 0.5 | 220-275 Δ / 380-480 Y | 2.6 Δ / 1.5 Y | 100 m³/h<br>59 CFM | −2.2 psi<br>−0.15 bar | 2.3 psi<br>0.16 bar | 56 | 10 |

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

## DIMENSIONS

All dimensions in mm

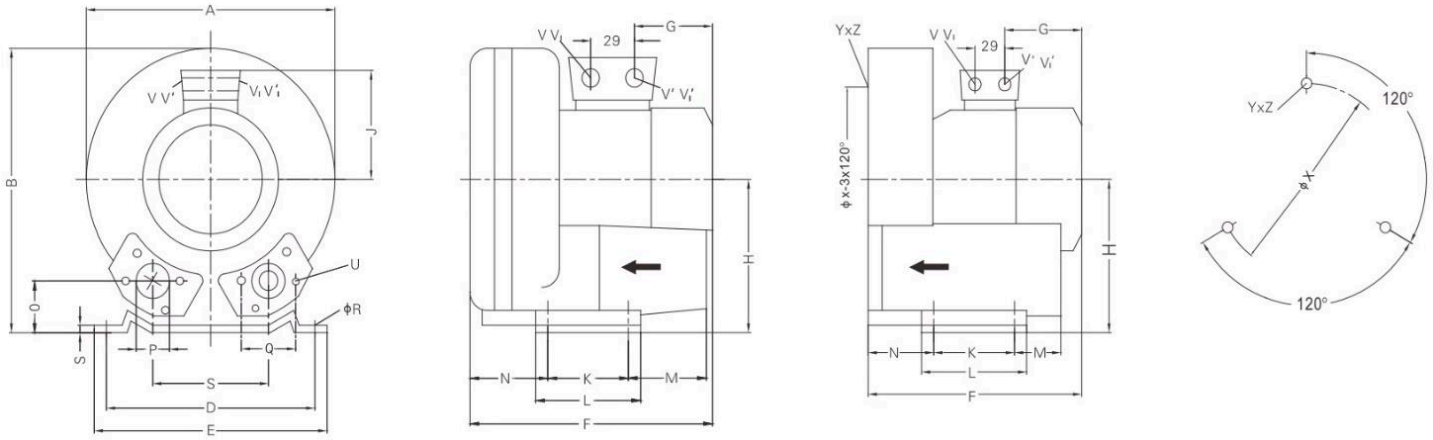


| Type | A | B | C | D | E | F | G | H | J | K | L | M | N | O | P | Q | ϕR | S | U | V | V' | Y_Z | X-Holes | ϕX |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **STRC0080-1MT250-6** | 246 | 247 | 90 | 205 | 230 | 219 | 92 | 128 | 111 | 83 | 108 | 75 | 71 | 39 | G 1 1/4" | 64 | 10 | 2.5 | M6 × 17 | M25 × 1.5 | M16 × 1.5 | M6 × 15 | 0/120°/240° | 140 |
| **STRC0080-1MA370-1** | 246 | 247 | 90 | 205 | 230 | 256 | 135 | 128 | 111 | 83 | 108 | 75 | 71 | 39 | G 1 1/4" | 64 | 10 | 2.5 | M6 × 17 | M16 × 1.5 | M25 × 1.5 | M6 × 15 | 0/120°/240° | 140 |
| **STRC0080-1MT400-6** | 246 | 247 | 90 | 205 | 230 | 256 | 135 | 128 | 111 | 83 | 108 | 75 | 71 | 39 | G 1 1/4" | 64 | 10 | 2.5 | M6 × 17 | M25 × 1.5 | M16 × 1.5 | M6 × 15 | 0/120°/240° | 140 |

**Let's size your blower.**
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com