REGENERATIVE BLOWER · SINGLE STAGE

# Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



| 175 m³/h | 3.2 psi | −3.0 psi | 0.83–1.5 kW | 64 dB(A) | 13–17 kg |
|---|---|---|---|---|---|
| 103 CFM | 0.22 bar | −0.21 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz


| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| Single stage | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |

## PERFORMANCE CURVES

### FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

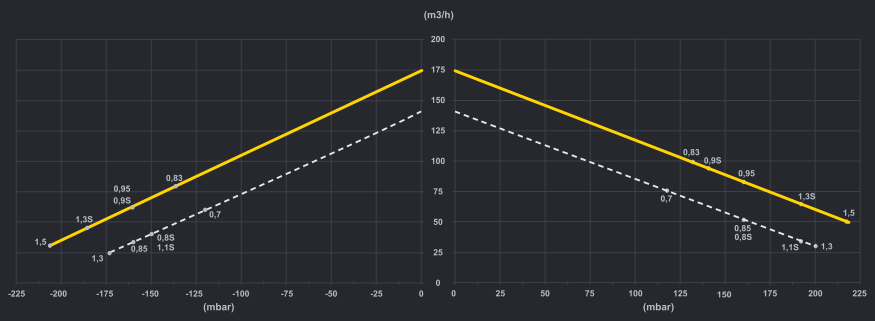


### POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

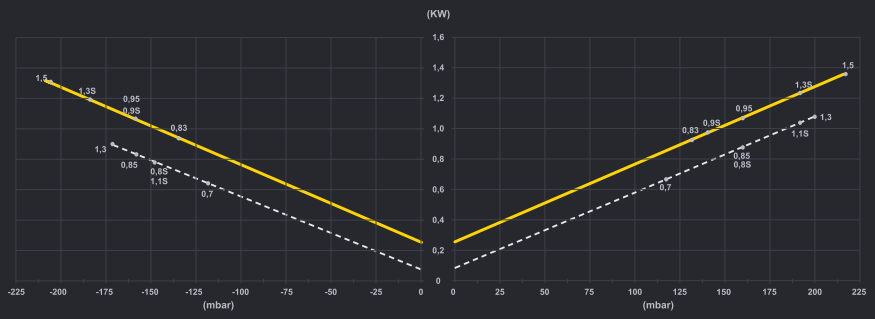


### TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

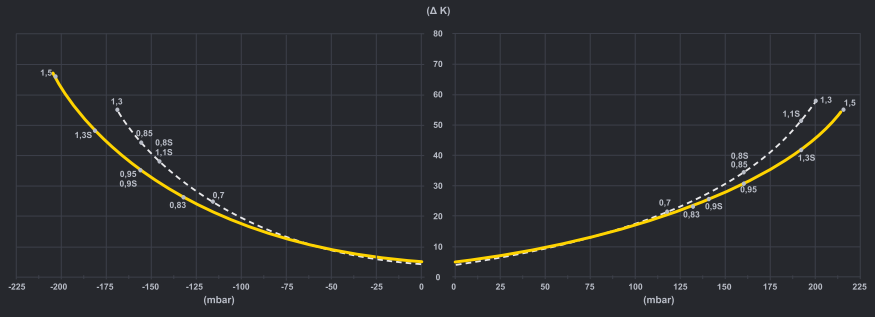


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.


## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRC0140-1MT700-6** | 0.83 | 220-275 Δ / 380-480 Y | 3.75 Δ / 2.15 Y | 175 m³/h<br>103 CFM | −1.9 psi<br>−0.13 bar | 1.9 psi<br>0.13 bar | 64 | 13 |
| **STRC0140-1MA800-1** | 0.9 | 230 | 5.8 | 175 m³/h<br>103 CFM | −2.3 psi<br>−0.16 bar | 2.0 psi<br>0.14 bar | 64 | 15 |
| **STRC0140-1MT850-6** | 0.95 | 220-275 Δ / 380-480 Y | 4.0 Δ / 2.3 Y | 175 m³/h<br>103 CFM | −2.3 psi<br>−0.16 bar | 2.3 psi<br>0.16 bar | 64 | 16 |
| **STRC0140-1MA111-1** | 1.3 | 230 | 8.3 | 175 m³/h<br>103 CFM | −2.6 psi<br>−0.18 bar | 2.8 psi<br>0.19 bar | 64 | 16 |
| **STRC0140-1MT131-6** | 1.5 | 220-275 Δ / 380-480 Y | 5.7 Δ / 3.3 Y | 175 m³/h<br>103 CFM | −3.0 psi<br>−0.21 bar | 3.2 psi<br>0.22 bar | 64 | 17 |

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

## DIMENSIONS

All dimensions in mm

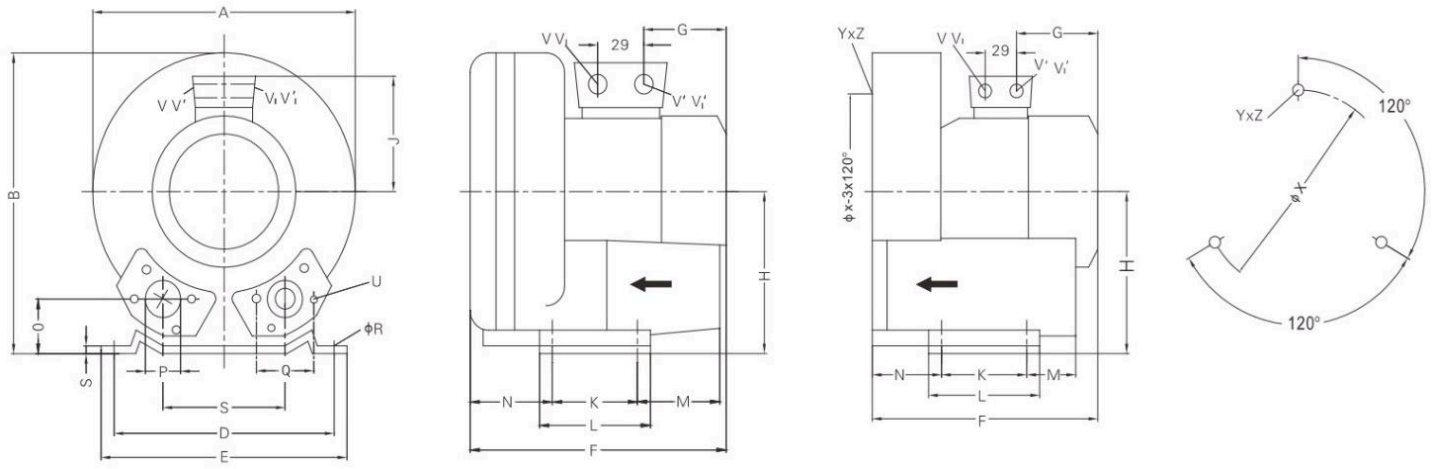


| Type | A | B | C | D | E | F | G | H | J | K | L | M | N | O | P | Q | ϕR | S | U | V | V' | Y_Z | X-Holes | ϕX |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **STRC0140-1MT700-6** | 286 | 302 | 115 | 225 | 225 | 269 | 129 | 154 | 111 | 95 | 130 | 70 | 75 | 46 | G 1 1/2" | 72 | 12 | 3 | M6 × 19 | M16 × 1.5 | M25 × 1.5 | M6 × 15 | 0/120°/240° | 174 |
| **STRC0140-1MA800-1** | 286 | 302 | 115 | 225 | 225 | 294 | 156 | 154 | 120 | 95 | 130 | 70 | 75 | 46 | G 1 1/2" | 72 | 12 | 3 | M6 × 19 | M16 × 1.5 | M25 × 1.5 | M6 × 15 | 0/120°/240° | 174 |
| **STRC0140-1MT850-6** | 286 | 302 | 115 | 225 | 225 | 292 | 156 | 154 | 120 | 95 | 130 | 70 | 75 | 46 | G 1 1/2" | 72 | 12 | 3 | M6 × 19 | M16 × 1.5 | M25 × 1.5 | M6 × 15 | 0/120°/240° | 174 |
| **STRC0140-1MA111-1** | 286 | 302 | 115 | 225 | 225 | 294 | 156 | 154 | 120 | 95 | 130 | 70 | 75 | 46 | G 1 1/2" | 72 | 12 | 3 | M6 × 19 | M16 × 1.5 | M25 × 1.5 | M6 × 15 | 0/120°/240° | 174 |
| **STRC0140-1MT131-6** | 286 | 302 | 115 | 225 | 225 | 292 | 156 | 154 | 120 | 95 | 130 | 70 | 75 | 46 | G 1 1/2" | 72 | 12 | 3 | M6 × 19 | M16 × 1.5 | M25 × 1.5 | M6 × 15 | 0/120°/240° | 174 |

## Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com