
HIGH-PERFORMANCE BLOWER · SINGLE STAGE

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



57 m³/h	4.6 psi	−3.9 psi	0.63 kW	62 dB(A)	16–18 kg
34 CFM	0.32 bar	−0.27 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

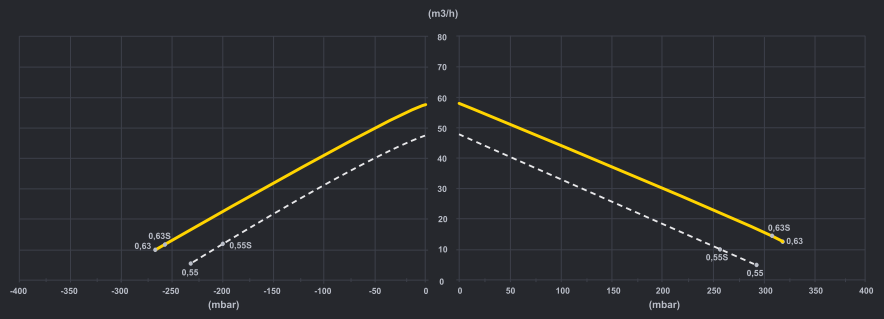

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

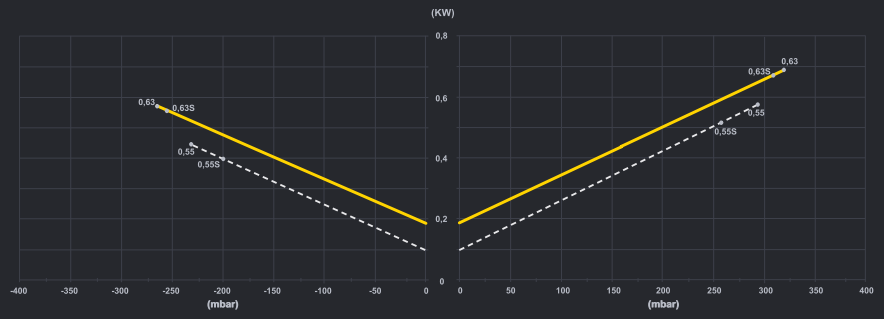

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

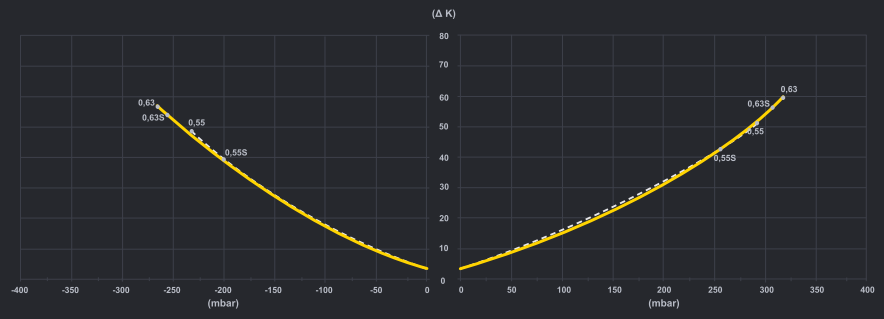

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.


MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0045-1MA550-1	0.63	230	7.1	57 m³/h 34 CFM	−3.8 psi −0.26 bar	4.5 psi 0.31 bar	62	18
STRP0045-1MT550-6	0.63	220-275 Δ / 380-480 Y	3.7 Δ / 2.1 Y	57 m³/h 34 CFM	−3.9 psi −0.27 bar	4.6 psi 0.32 bar	62	16

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

DIMENSIONS

All dimensions in mm

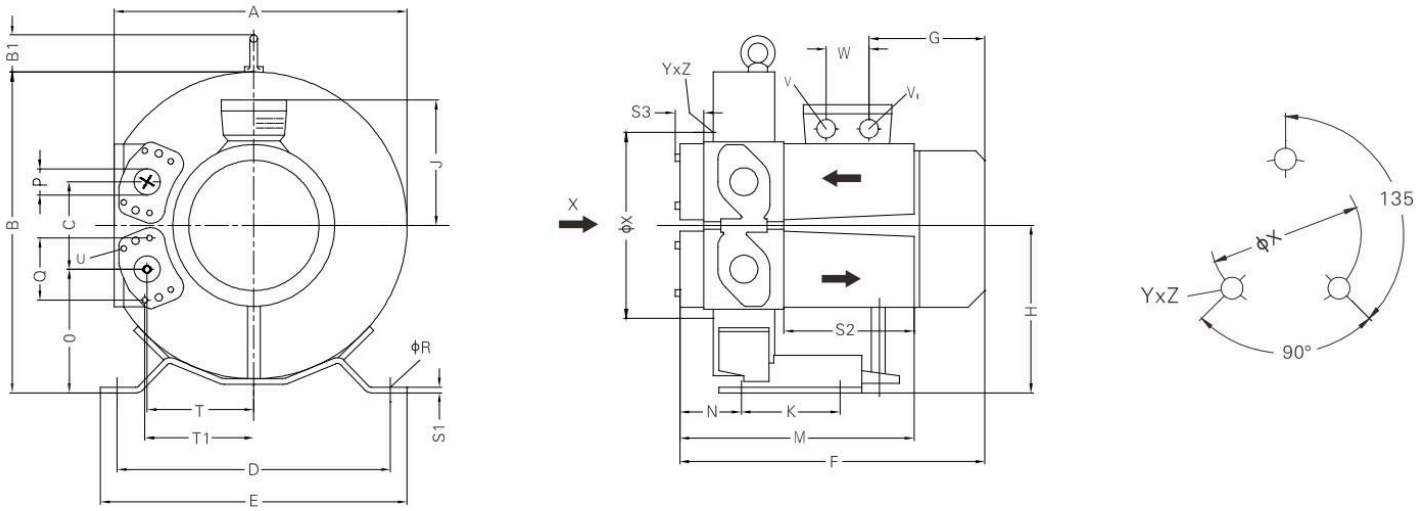

Type	A	B	B'	C	D	E	F	G	H	J	K	M	N	O	P
STRP0045-1MA550-1	294	319	39	87	260	298	293	129	167	111	105	252	65	124	G1 ¼"
STRP0045-1MT550-6	294	319	39	87	260	298	293	129	167	111	105	252	65	124	G1 ¼"

Type	Q	R	S1	S2	S3	T	T1	U	V	V1	W	X	YxZ
STRP0045-1MA550-1	64	14	4	140	31	105	107	–	M6 X 17	M16 X 1.5	–	153	M6 X 15
STRP0045-1MT550-6	64	14	4	140	31	105	107	–	M6 X 17	M16 X 1.5	–	153	M6 X 15

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com