HIGH-PERFORMANCE BLOWER · 2 STAGES IN SERIES

# High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



| 195 m³/h | 12.2 psi | −7.0 psi | 3.8–6.6 kW | 72 dB(A) | 48–65 kg |
|---|---|---|---|---|---|
| 115 CFM | 0.84 bar | −0.48 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz


| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| 2 stages, series | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |

## PERFORMANCE CURVES

### FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

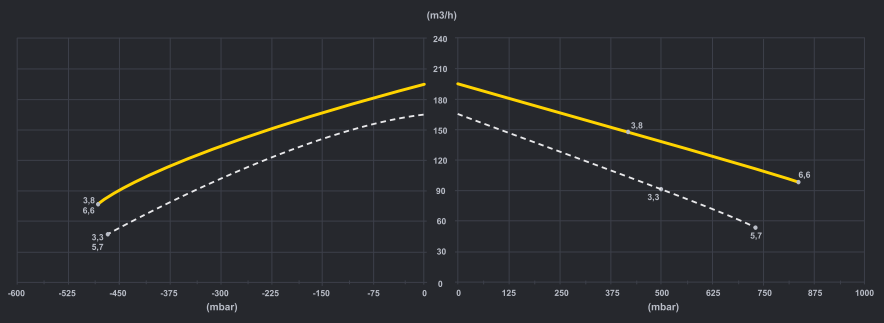


### POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

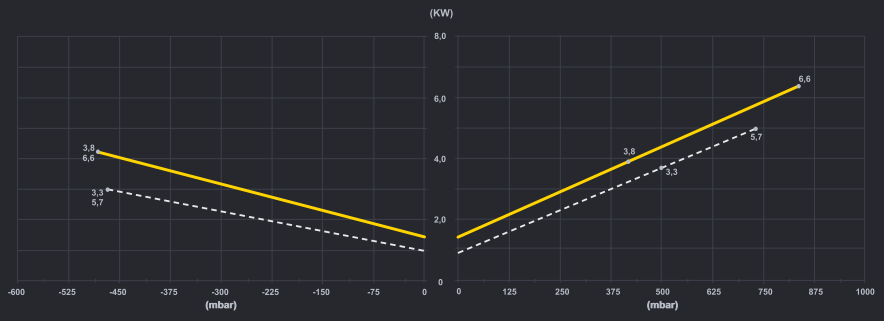


### TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

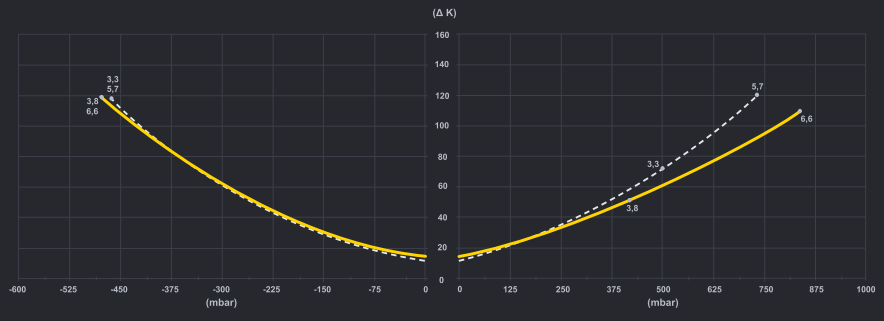


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.


## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRP0165-2ST331-6** | 3.8 | 220-275 Δ / 380-480 Y | Δ 14.2 / Y 8.2 | 195 m³/h<br>115 CFM | −7.0 psi<br>−0.48 bar | 6.1 psi<br>0.42 bar | 71 | 48 |
| **STRP0165-2ST571-7** | 6.6 | 380-480 Δ / 660-720 Y | Δ 12.0 / Y 6.0 | 195 m³/h<br>115 CFM | −7.0 psi<br>−0.48 bar | 12.2 psi<br>0.84 bar | 72 | 65 |

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

## DIMENSIONS

All dimensions in mm

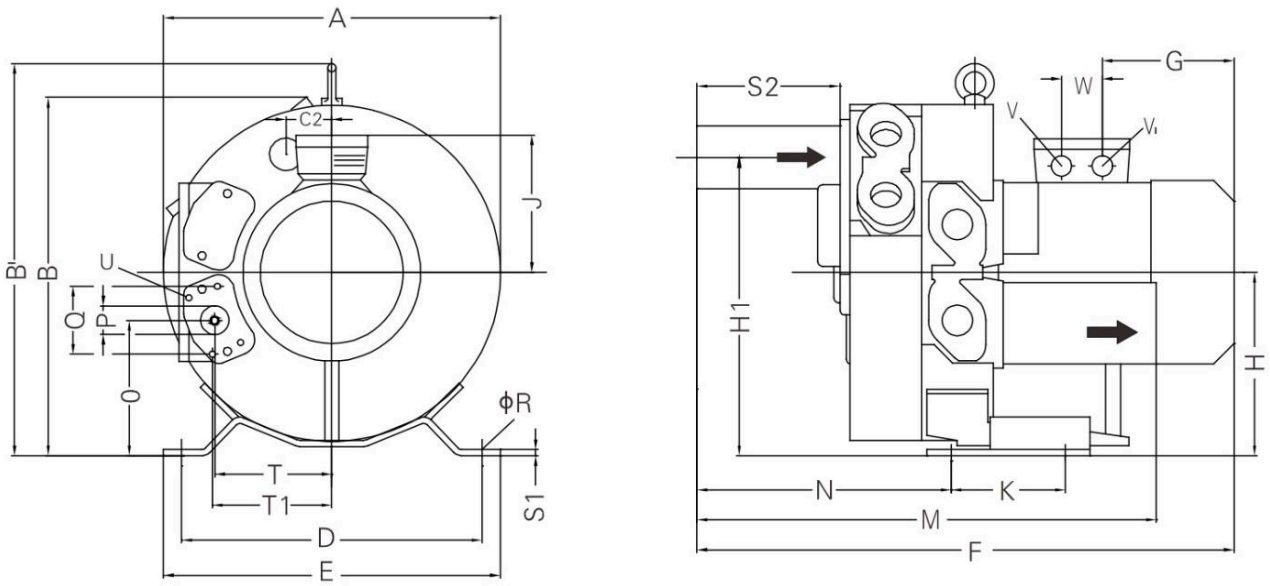


| Type | A | B | B′ | C2 | D | E | F | G | H | H1 | J | K | M | N | O | P |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STRP0165-2ST331-6 | 442 | 457 | 495 | 63 | 372 | 406 | 578 | 211 | 236 | 389 | 128 | 152 | 458 | 259 | 173 | G1 ¼" |
| STRP0165-2ST571-7 | 442 | 457 | 495 | 63 | 372 | 406 | 643 | 248 | 236 | 389 | 148 | 152 | 458 | 259 | 173 | G1 ¼" |

| Type | Q | ØR | S1 | S2 | S3 | T | T1 | U | V | V1 | W |
|---|---|---|---|---|---|---|---|---|---|---|---|
| STRP0165-2ST331-6 | 64 | 14 | 5 | 140 | 31 | 153 | 155 | M6 X 17 | M25 X 1.5 | M16 X 1.5 | 42 |
| STRP0165-2ST571-7 | 64 | 14 | 5 | 140 | 31 | 153 | 155 | M6 X 17 | M25 X 1.5 | M16 X 1.5 | 42 |

**Let's size your blower.**
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com