



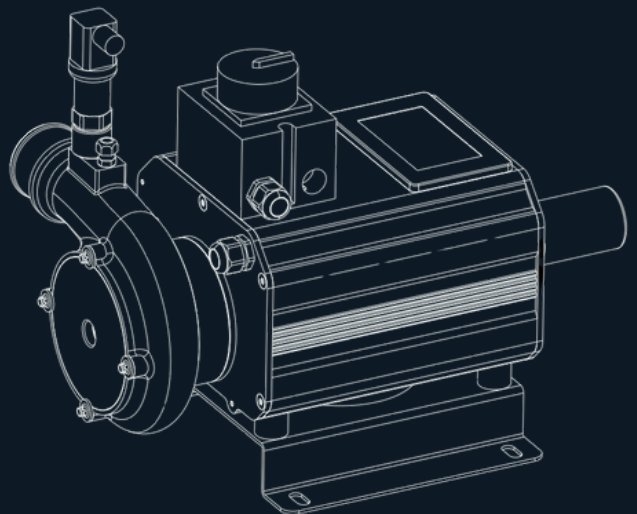

Jun 2025


High Speed Turbo Blower

Compact - Lightweight - Efficient

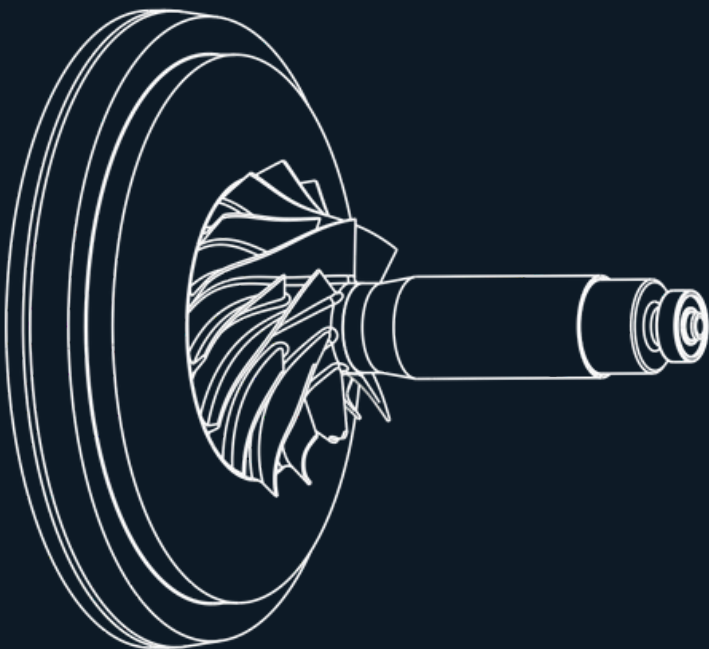



High Speed Turbo Blower

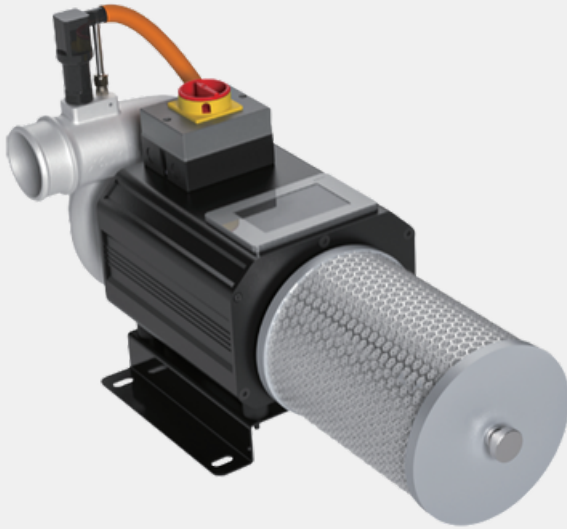


- Patented high speed motor (VFD integrated)
- Compact & light weight
- MODBUS compatible
- 18,000 hours maintenance free

Electric Motor

- Insulation Class H
- VFD/VSD Integrated
- Adjust speed instantly via HMI or MODBUS 3rd party PLC
- IP65

Options

- Single or 3Ph power
- 50 or 60Hz

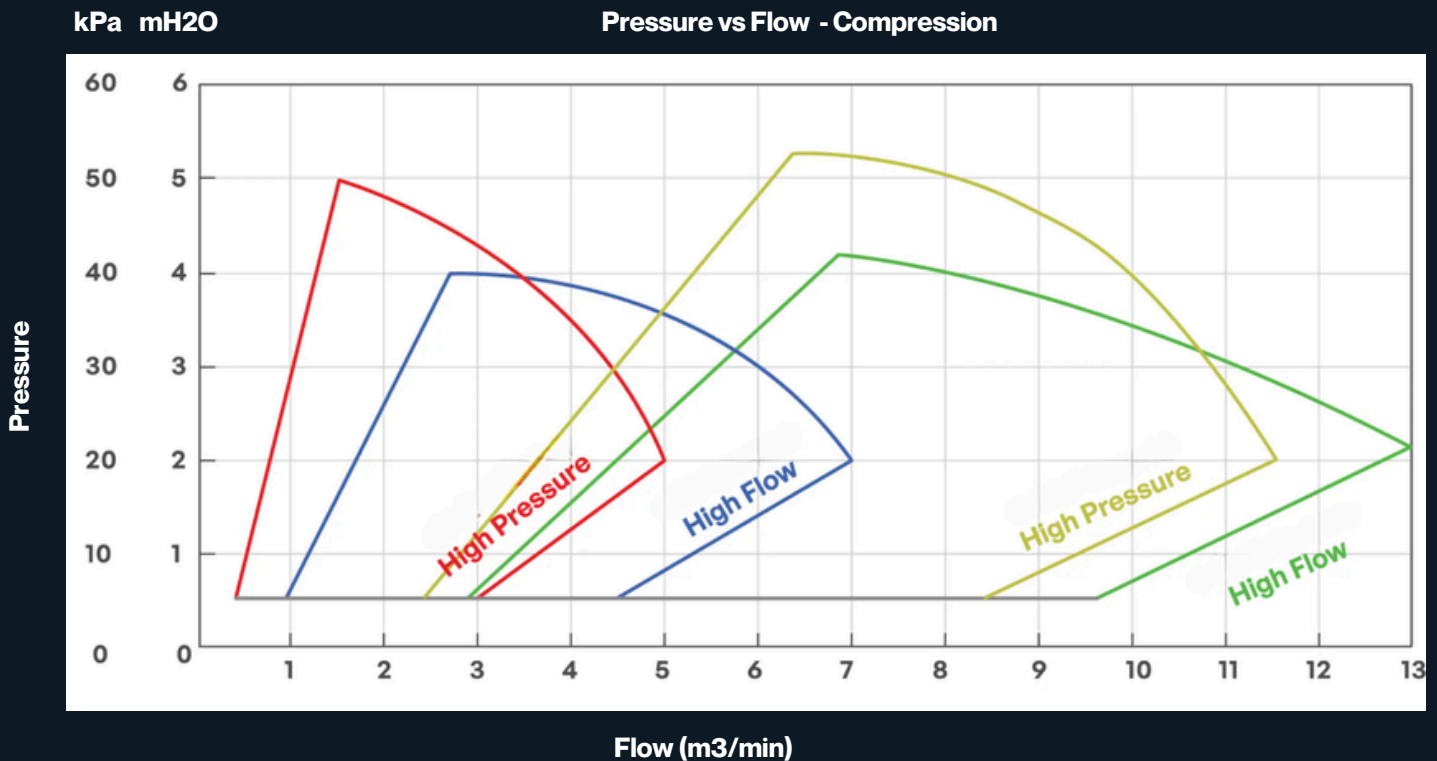

[STRT-A15-XXXX440](#)

[STRT-A15-XXXX430](#)

[STRT-A15-XXXX7.540](#)


[STRT-A15-XXXX4.530](#)




STRATOVAC
WWW.STRATOVAC.CA
438-880-4655
ABRUENS@STRATOVAC.CA

Model	Max. Pressure kPa gauge	Max. Flow Rate m ³ /min	Max. Flow Rate m ³ /h	Max. Speed rpm	Rated Power kW	Dimensions W x D x H mm	Compressed Air Connection Φ mm Hose Clamp	Max. Sound Pressure Level dB(A)	Mass kg
STRT-A15-XXXX440	40	7	420	80,000	4	503 x 359 x 341	75	72	11.8


Front View
Dimensions

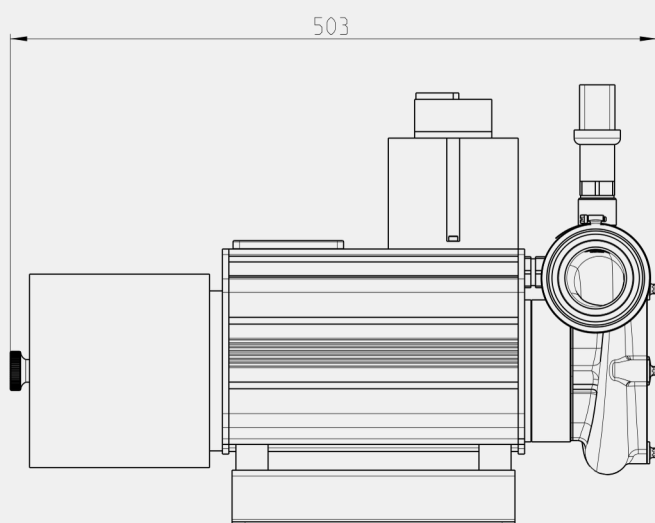

Side View

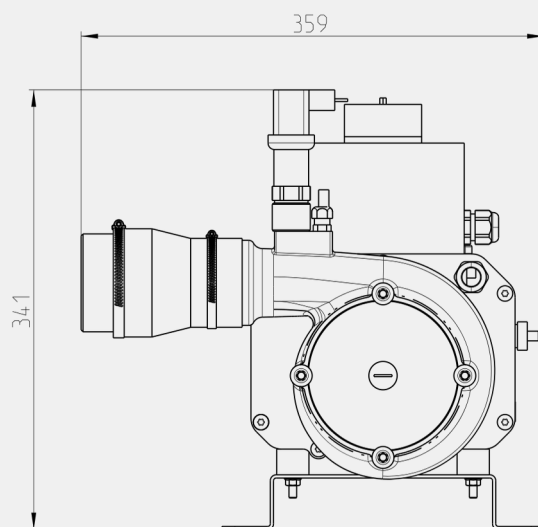


Top View

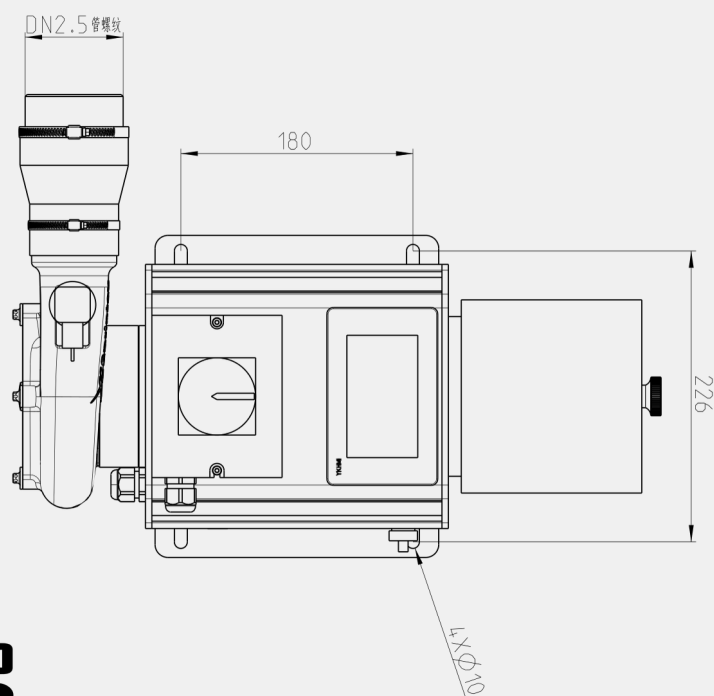


Model	Max. Pressure kPa gauge	Max. Flow Rate m ³ /min	Max. Flow Rate m ³ /h	Max. Speed rpm	Rated Power kW	Dimensions W x D x H mm	Compressed Air Connection Φ mm Hose Clamp	Max. Sound Pressure Level dB(A)	Mass kg
STRT-A15-XXXX430	50	135.0	300	80,000	3.5	507 x 343 x 335	75	71	11.2

Dimensions


Front View

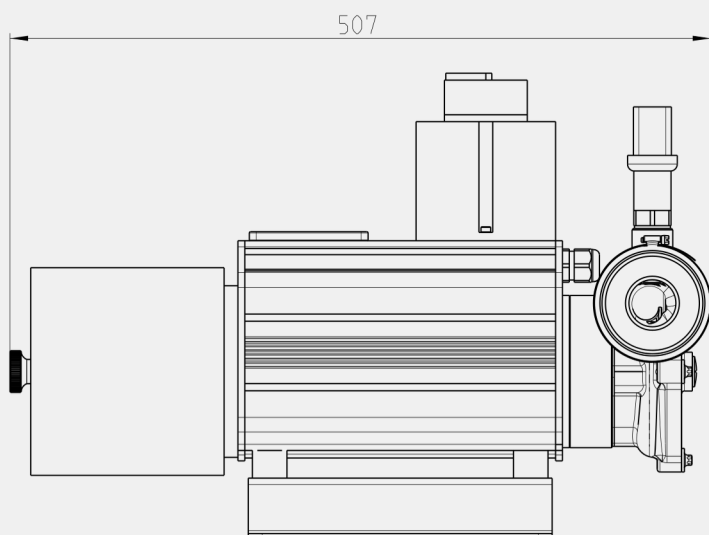

Side View

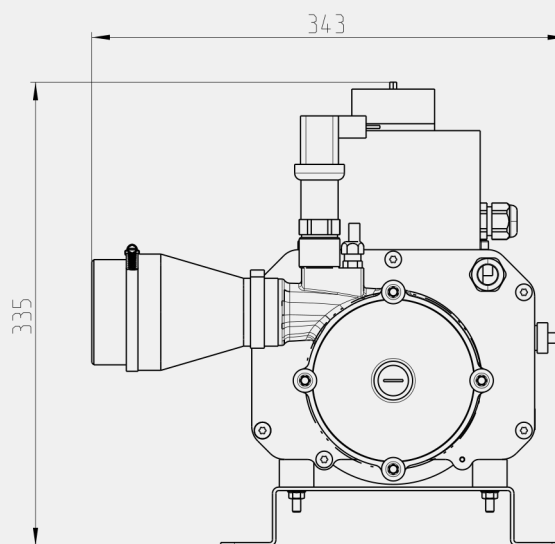


Top View

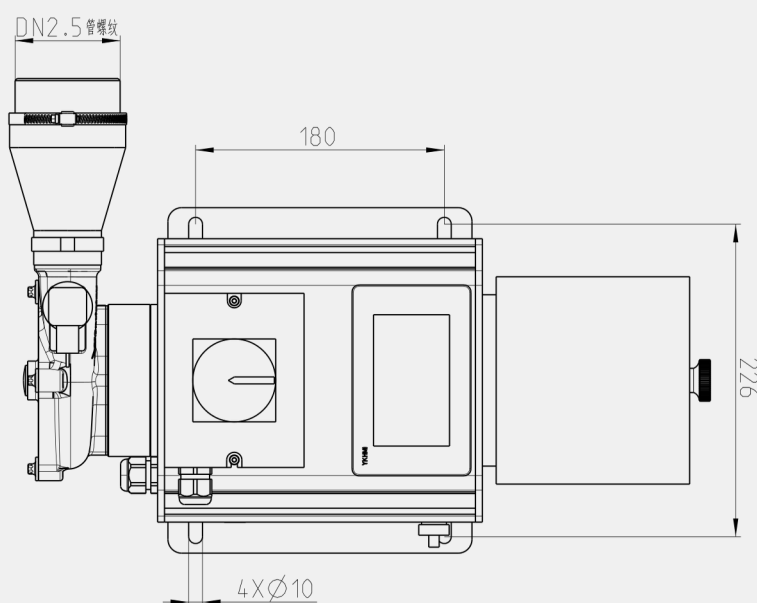


Model	Max. Pressure kPa gauge	Max. Flow Rate m ³ /min	Max. Flow Rate m ³ /h	Max. Speed rpm	Rated Power kW	Dimensions W x D x H mm	Compressed Air Connection Φ mm Hose Clamp	Max. Sound Pressure Level dB(A)	Mass kg
STRT-A15-XXXX7.530 & STRT-A15-XXXX7.540	40	13	780	80,000	7.5	601 x 265 x 374	75	74	14.8

Dimensions

Front View

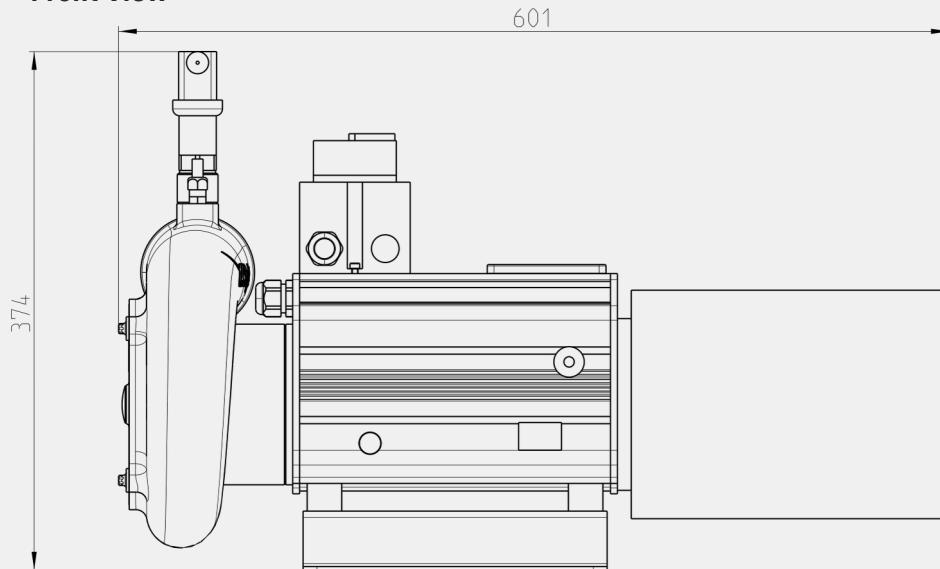

Side View

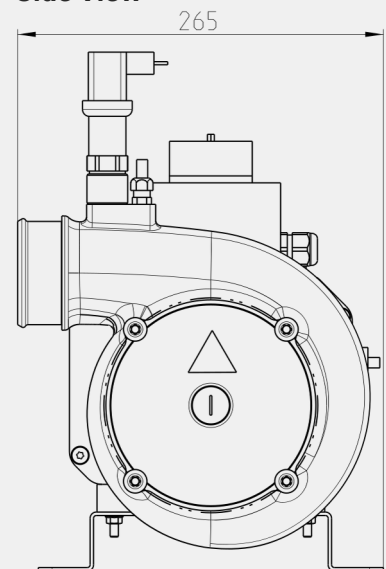

Top View

