

STROV-0020

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven



PUMPING SPEED

12 / 10 m³/h

END VACUUM

NM 2 mbar · L 20 mbar

MOTOR (3-PHASE)

0.4 / 0.4 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	12 m ³ /h (7.1 cfm) @ 60 Hz / 10 m ³ /h (5.9 cfm) @ 50 Hz
End vacuum, absolute	NM: 2 mbar · L: 20 mbar
Three-phase motor, IEC	0.4 kW @ 60 Hz / 0.4 kW @ 50 Hz
Single-phase motor	0.4 kW, 50/60 Hz
Speed	1740 rpm @ 60 Hz / 1450 rpm @ 50 Hz
Noise level	59 dB(A) @ 60 Hz / 57 dB(A) @ 50 Hz
Operating temperature	77 °C
Oil capacity	0.5 L
Connections (inlet / exhaust)	1/2" / 1-1/4" G (BSP) / NPT
Weight with motor, without oil	20 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator

OPTIONAL EQUIPMENT

- Additional oil level sight glass


VERSIONS

- NM: deeper medium vacuum, 2 mbar, continuous duty with oil return line
- L: medium vacuum, 10 to 20 mbar, continuous duty with oil return line

- TEFC high-efficiency motor
- Anti-suck-back valve
- Oil level sight glass
- Exhaust cover silencer


- Exhaust pressure gauge
- Threaded exhaust cover

PERFORMANCE CURVE

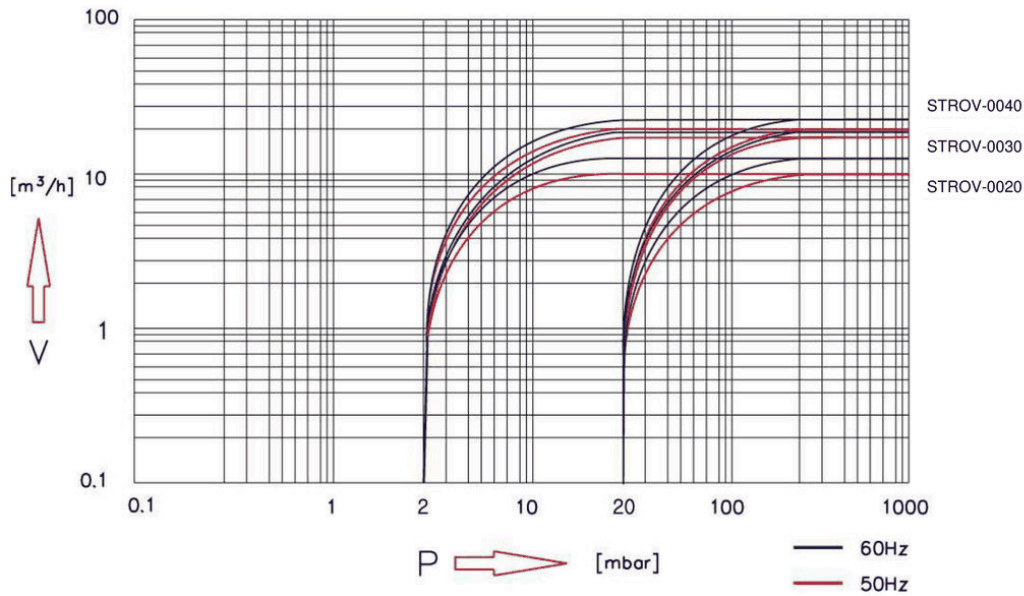

The curve covers the models of this series; each model plateaus at its own pumping speed.

DIMENSIONS

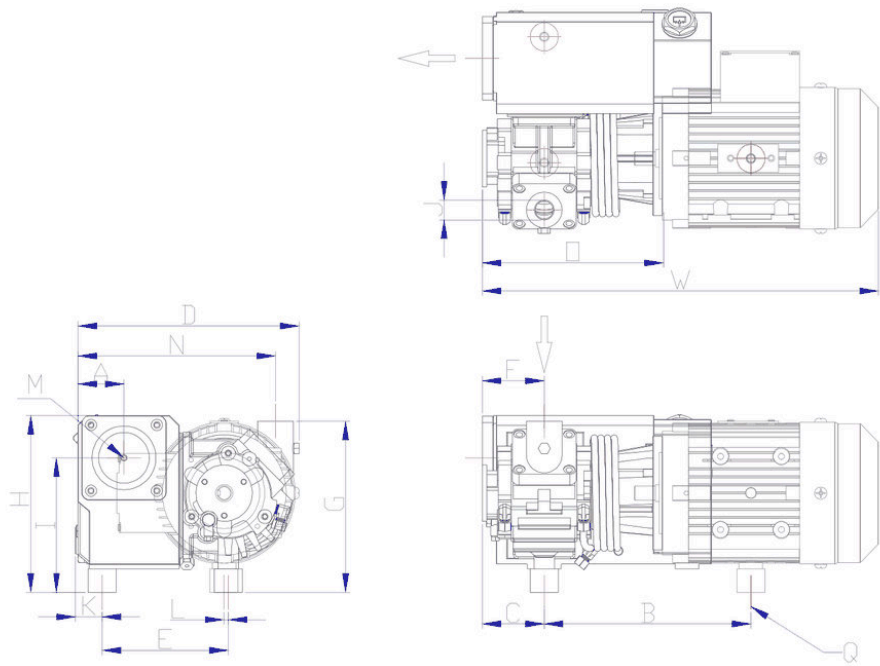

DIMENSIONS	W	D	H	A	B	C	E	F	G	I	J	K	L	M	N	O	Q
STROV-0020	422	258	188	49	220	66	134	66	182	143	1/2"	29	4	G1-1/4"	210	192	3xM8
STROV-0030	452				235	81		81								222	
STROV-0040	422				220	66		66								192	

Dimensions in mm. Dimensions in brackets are for 50 Hz.