

STROV-0060

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven



PUMPING SPEED

36 / 30 m³/h

END VACUUM

H 0.1 mbar

MOTOR (3-PHASE)

1.1 / 1.1 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	36 m ³ /h (21 cfm) @ 60 Hz / 30 m ³ /h (18 cfm) @ 50 Hz
End vacuum, absolute	H: 0.1 mbar
Three-phase motor, IEC	1.1 kW @ 60 Hz / 1.1 kW @ 50 Hz
Three-phase motor, NEMA	2 hp @ 60 Hz
Single-phase motor	1.5 kW, 50/60 Hz
Speed	1740 rpm @ 60 Hz / 1450 rpm @ 50 Hz
Noise level	67 dB(A) @ 60 Hz / 64 dB(A) @ 50 Hz
Operating temperature	76 / 78 °C
Oil capacity	1.4 L
Connections (inlet / exhaust)	1-1/4" / 1-1/4" G (BSP) / NPT
Weight with motor, without oil	47 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator
- TEFC high-efficiency motor

OPTIONAL EQUIPMENT

- Exhaust pressure gauge


VERSIONS

- H: deep vacuum, 0.1 mbar, continuous duty with float valve system

- Anti-suck-back valve
- Oil level sight glass
- Gas ballast valve (N and F versions)
- Spin-on oil filter


- Oil level switch
- Heater

PERFORMANCE CURVE

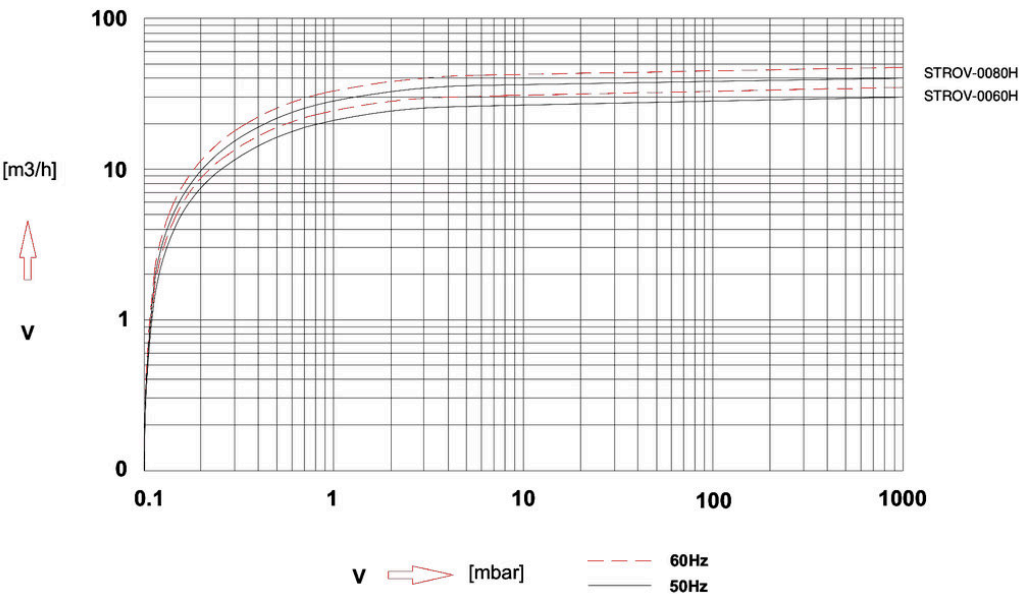

The curve covers the models of this series; each model plateaus at its own pumping speed.

DIMENSIONS

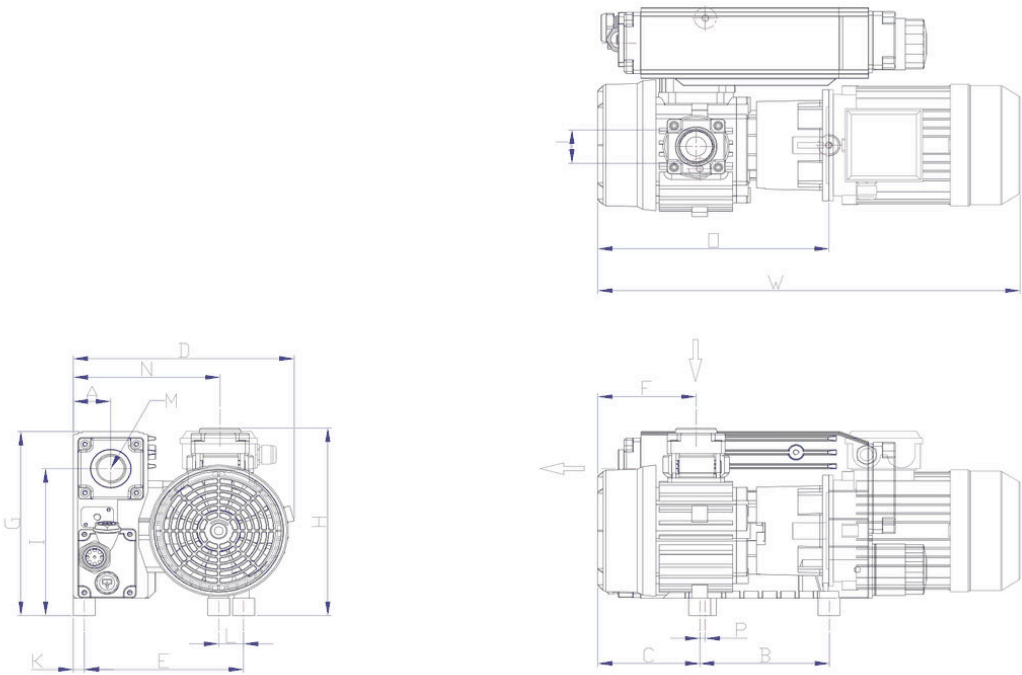

DIMENSIONS	W	D	H	A	B	C	E	F	G	I	J	K	L	M	N	O	P	Q
STROV-0060	580	297	271	52	177	140	219	135	267	211	G1-1/4"	15	39	G1-1/4"	202	317	7	3xM8
STROV-0080	630 (605)				192	150		150								347		

* The dimensions in () are for 50Hz

Dimensions in mm. Dimensions in brackets are for 50 Hz.

OPTIONS THAT FIT YOUR SUGAR BUSH



Heater. A thermostat-controlled heater can be installed on the service cover. It warms the oil before start-up when the ambient temperature is below 5 °C, or heats the oil to about 75 °C to drive off moisture entering the pump from the first minutes of operation. An oil level switch is required, to protect the heater from overheating if the oil level falls below the element.

Available heater power (AC, voltage on request): **0.5 / 1 kW**