

STROV-0120

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven



PUMPING SPEED

75 / 63 m³/h

END VACUUM

H 0.1 mbar

MOTOR (3-PHASE)

2.2 / 1.5 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	75 m ³ /h (44 cfm) @ 60 Hz / 63 m ³ /h (37 cfm) @ 50 Hz
End vacuum, absolute	H: 0.1 mbar
Three-phase motor, IEC	2.2 kW @ 60 Hz / 1.5 kW @ 50 Hz
Three-phase motor, NEMA	3 hp @ 60 Hz
Speed	1740 rpm @ 60 Hz / 1450 rpm @ 50 Hz
Noise level	68 dB(A) @ 60 Hz / 65 dB(A) @ 50 Hz
Operating temperature	83 / 85 °C
Oil capacity	2.5 L
Connections (inlet / exhaust)	1-1/4" / 1-1/4" G (BSP) / NPT
Weight with motor, without oil	66 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator
- TEFC high-efficiency motor

OPTIONAL EQUIPMENT

- Exhaust pressure gauge


VERSIONS

- H: deep vacuum, 0.1 mbar, continuous duty with float valve system

- Anti-suck-back valve
- Oil level sight glass
- Gas ballast valve (N and F versions)
- Spin-on oil filter

- Oil level switch
- Heater

DIMENSIONS

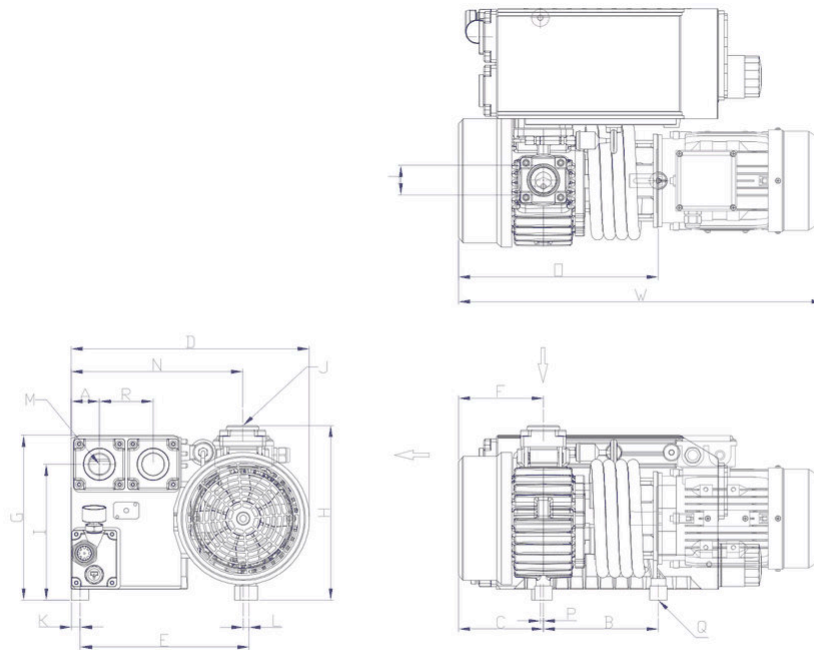

DIMENSIONS	W	D	H	A	B	C	E	F	G	I	J	K	L	M	N	□	P	Q	R
STROV-0120	654 (627)	417	305	49	194	144	292	142	290	240	G1-1/4"	15	10	G1-1/4"	297	337	5.3	3xM8	94
STROV-0200	714				224	175		175								399			

* The dimensions in () are for 50Hz

Dimensions in mm. Dimensions in brackets are for 50 Hz.

OPTIONS THAT FIT YOUR SUGAR BUSH



Heater. A thermostat-controlled heater can be installed on the service cover. It warms the oil before start-up when the ambient temperature is below 5 °C, or heats the oil to about 75 °C to drive off moisture entering the pump from the first minutes of operation. An oil level switch is required, to protect the heater from overheating if the oil level falls below the element.

Available heater power (AC, voltage on request): **0.5 / 1 kW**