

STROV-0350

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven



PUMPING SPEED

210 / 175 m³/h

END VACUUM

H 0.1 mbar

MOTOR (3-PHASE)

5.5 / 5.5 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	210 m ³ /h (124 cfm) @ 60 Hz / 175 m ³ /h (103 cfm) @ 50 Hz
End vacuum, absolute	H: 0.1 mbar
Three-phase motor, IEC	5.5 kW @ 60 Hz / 5.5 kW @ 50 Hz
Three-phase motor, NEMA	7.5 hp @ 60 Hz
Speed	1740 rpm @ 60 Hz / 1450 rpm @ 50 Hz
Noise level	77 dB(A) @ 60 Hz / 74 dB(A) @ 50 Hz
Operating temperature	77 / 80 °C
Oil capacity	8 L
Connections (inlet / exhaust)	2" / 2" G (BSP) / NPT
Weight with motor, without oil	164 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator
- TEFC high-efficiency motor

OPTIONAL EQUIPMENT

- Exhaust pressure gauge
- Oil level switch (port)


VERSIONS

- H: deep vacuum, 0.1 mbar, continuous duty with float valve system

- Anti-suck-back valve
- Oil level sight glass
- Gas ballast valve
- Built-in float valve for oil return
- Spin-on oil filter

- Temperature switch (port)
- Heater

DIMENSIONS

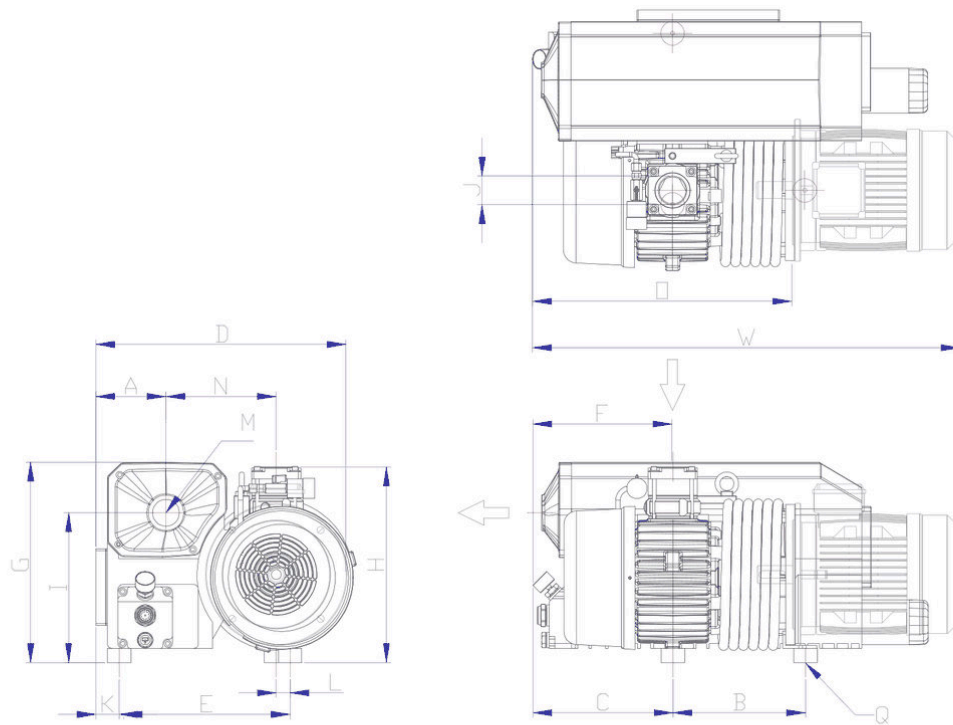

DIMENSIONS	W	D	H	A	B	C	E	F	G	I	J	K	L	M	N	□	Q
STROV-0350	905	529	413	148	280	296	360	294	423	316	G 2"	50	29	G 2"	233	554	3xM8

Dimensions in mm. Dimensions in brackets are for 50 Hz.

OPTIONS THAT FIT YOUR SUGAR BUSH



Heater. A thermostat-controlled heater can be installed on the service cover. It warms the oil before start-up when the ambient temperature is below 5 °C, or heats the oil to about 75 °C to drive off moisture entering the pump from the first minutes of operation. An oil level switch is required, to protect the heater from overheating if the oil level falls below the element.

Available heater power (AC, voltage on request): **1 / 1.5 kW**