

STROV-0430

Oil-lubricated rotary vane vacuum pump

Single stage, oil re-circulating, air cooled, direct driven



PUMPING SPEED

258 / 215 m³/h

END VACUUM

H 0.1 mbar

MOTOR (3-PHASE)

5.5 / 5.5 kW

Made in South Korea

CE marked

SPECIFICATIONS

Pumping speed (displacement)	258 m ³ /h (152 cfm) @ 60 Hz / 215 m ³ /h (127 cfm) @ 50 Hz
End vacuum, absolute	H: 0.1 mbar
Three-phase motor, IEC	5.5 kW @ 60 Hz / 5.5 kW @ 50 Hz
Three-phase motor, NEMA	7.5 hp @ 60 Hz
Speed	1740 rpm @ 60 Hz / 1450 rpm @ 50 Hz
Noise level	77 dB(A) @ 60 Hz / 74 dB(A) @ 50 Hz
Operating temperature	82 / 85 °C
Oil capacity	8 L
Connections (inlet / exhaust)	2" / 2" G (BSP) / NPT
Weight with motor, without oil	145 kg

Weight varies with the motor specification. Where two values are shown: 50 Hz motor / 60 Hz motor. Operating temperature: 50 Hz / 60 Hz where two values are shown.

FEATURES

- Compact, reliable and durable design, easy to maintain and operate
- Simple installation: air cooled, no cooling water required
- Direct drive (C-face), no belts
- Integral exhaust filter: discharge air over 99% oil free
- Quiet operation

STANDARD EQUIPMENT

- Composite vane
- Wire mesh inlet filter screen
- Vibration isolator
- TEFC high-efficiency motor

OPTIONAL EQUIPMENT

- Exhaust pressure gauge
- Oil level switch (port)


VERSIONS

- H: deep vacuum, 0.1 mbar, continuous duty with float valve system

- Anti-suck-back valve
- Oil level sight glass
- Gas ballast valve
- Built-in float valve for oil return
- Spin-on oil filter


- Temperature switch (port)
- Heater

PERFORMANCE CURVE

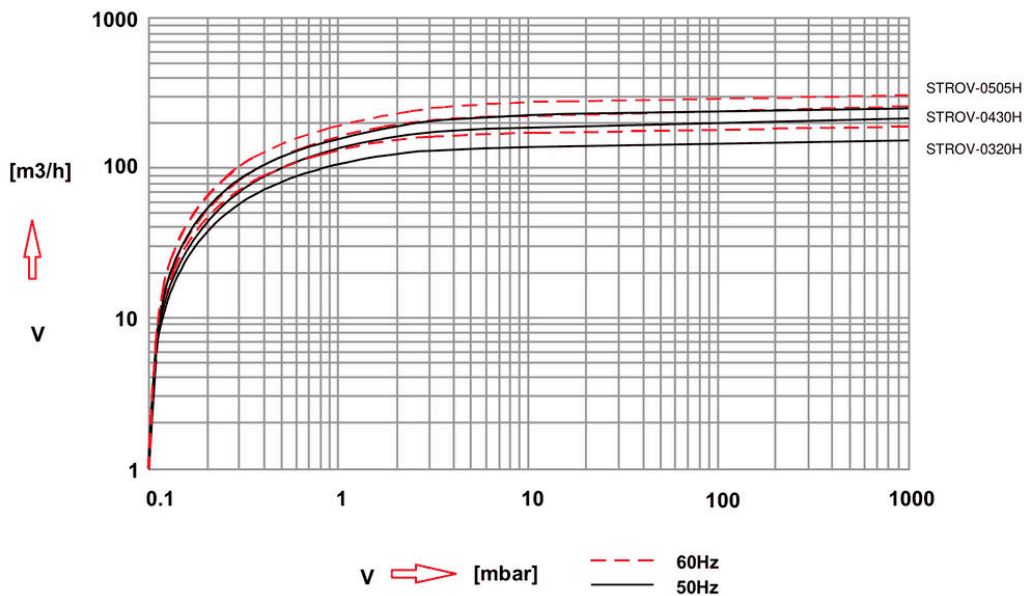

The curve covers the models of this series; each model plateaus at its own pumping speed.

DIMENSIONS

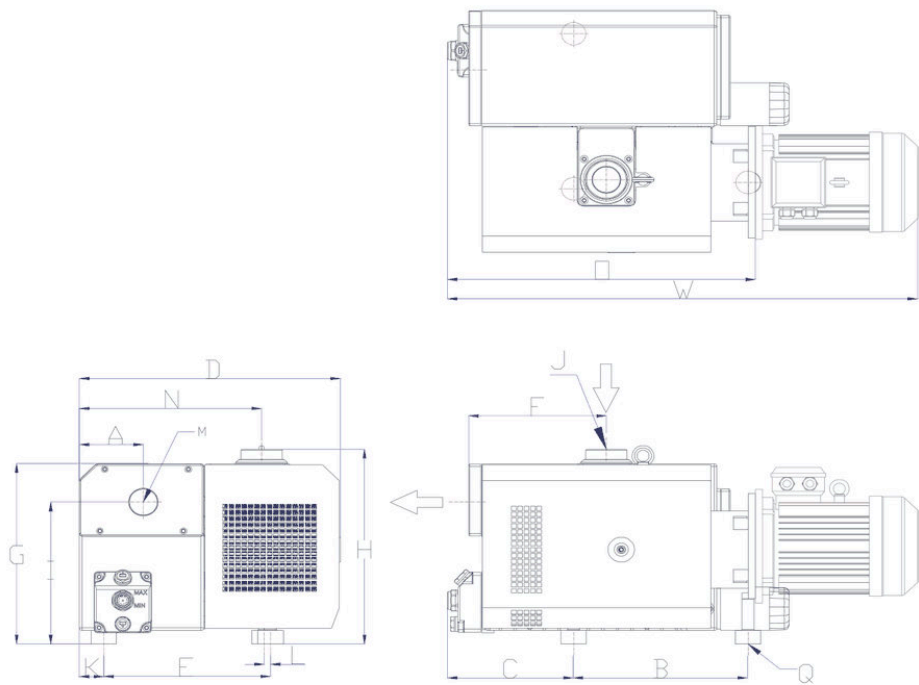

MODEL	W	D	H	A	B	C	E	F	G	I	J	K	L	M	N	O	Q
STROV-0320	903	535	429	131	297	257	366	282	397	313	G 2"	50	12.5	G 2"	373	570	3xM10
STROV-0430	962				357	258						26				630	
STROV-0505	1090				422	258						26				695	

Dimensions in mm. Dimensions in brackets are for 50 Hz.

OPTIONS THAT FIT YOUR SUGAR BUSH



Heater. A thermostat-controlled heater can be installed on the service cover. It warms the oil before start-up when the ambient temperature is below 5 °C, or heats the oil to about 75 °C to drive off moisture entering the pump from the first minutes of operation. An oil level switch is required, to protect the heater from overheating if the oil level falls below the element.

Available heater power (AC, voltage on request): **1 / 1.5 kW**