
STRC0070-1M: Single stage Side Channel Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

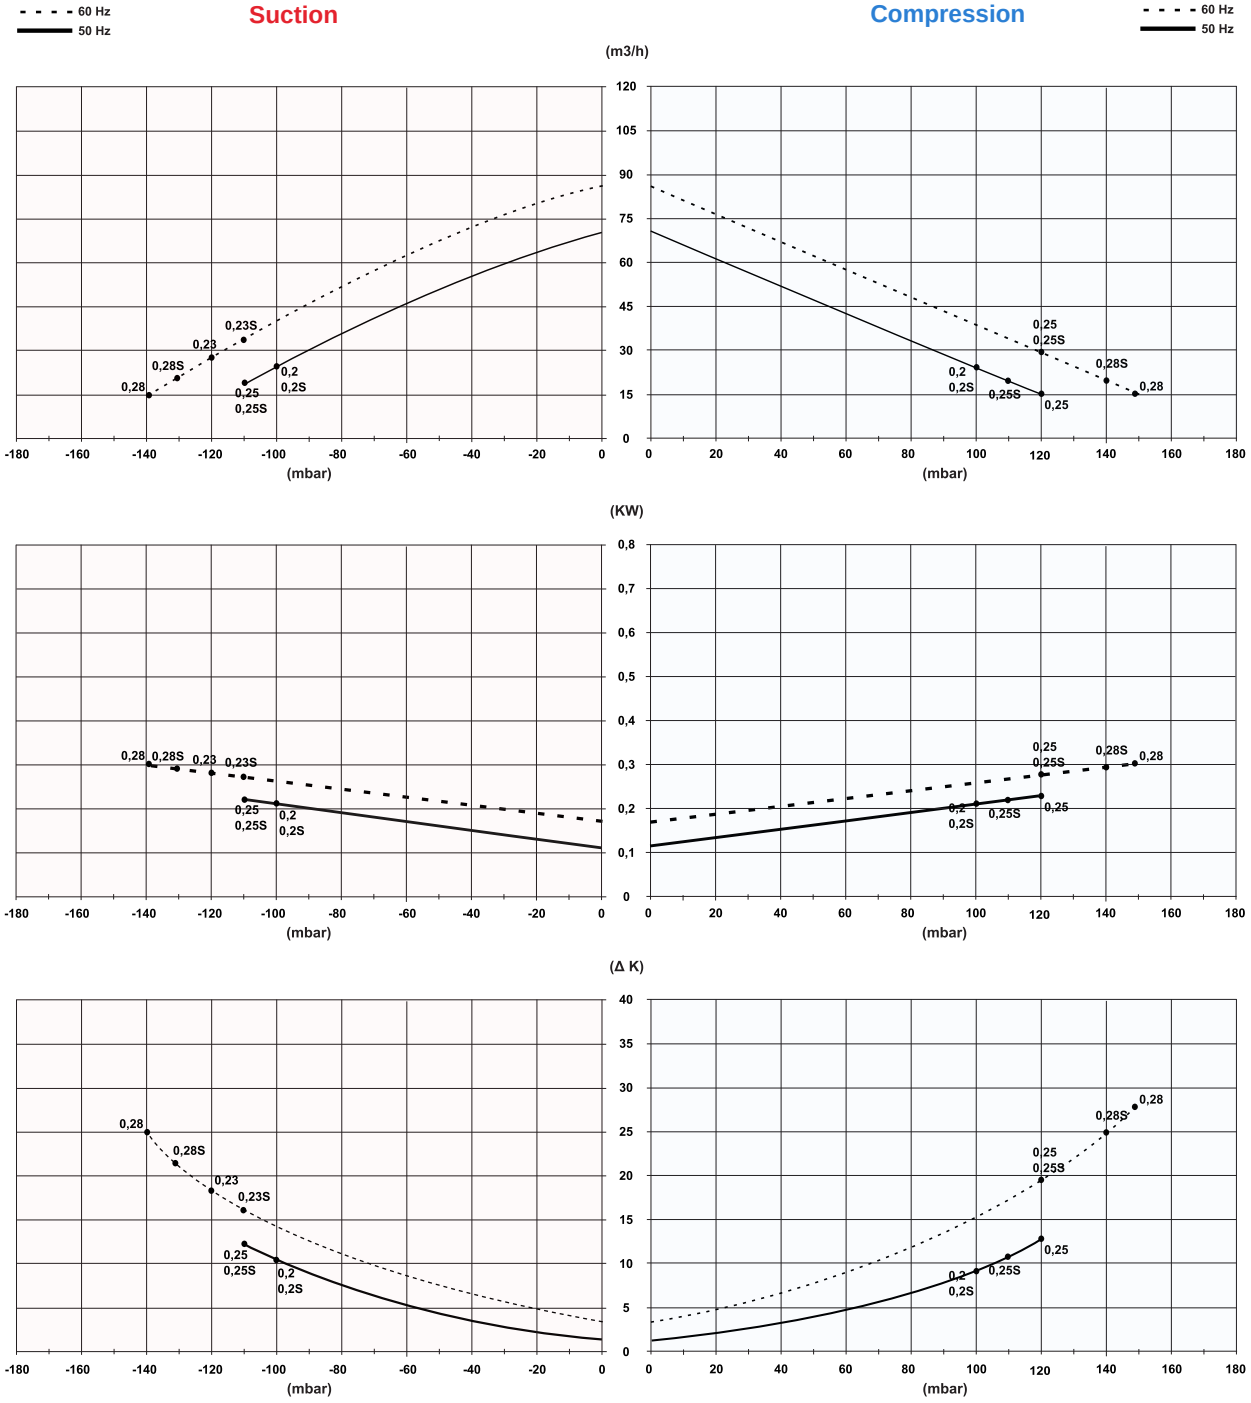

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRC0070-1M: Single stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0070-1MA200-1	0,2	50	230	1,5	70	-100 / 100	48	7
	0,23	60	230	1,6	84	-110 / 120	50	
STRC0070-1MT200-6	0,2	50	200-240 Δ / 345-415 Y	1,75 Δ / 1,0 Y	70	-100 / 100	48	6
	0,23	60	220-275 Δ / 380-480 Y	1,75 Δ / 1,0 Y	84	-120 / 120	50	
STRC0070-1MA250-1	0,25	50	230	1,7	70	-110 / 110	48	8
	0,28	60	230	1	84	-130 /140	50	
STRC0070-1MT250-6	0,25	50	200-240 Δ / 345-415 Y	1,2 Δ / 1,2 Y	70	-110 / 120	48	7
	0,28	60	220-275 Δ / 380-480 Y	2,0 Δ / 1,15 Y	84	-140 /150	50	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T…-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T…-5	50	500 Δ
	60	575 Δ
STRC ….-..T…-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T…-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A…-1	50	230
	60	230
STRC ….-..S…-5	50	115/230
	60	115/230

Dimensions

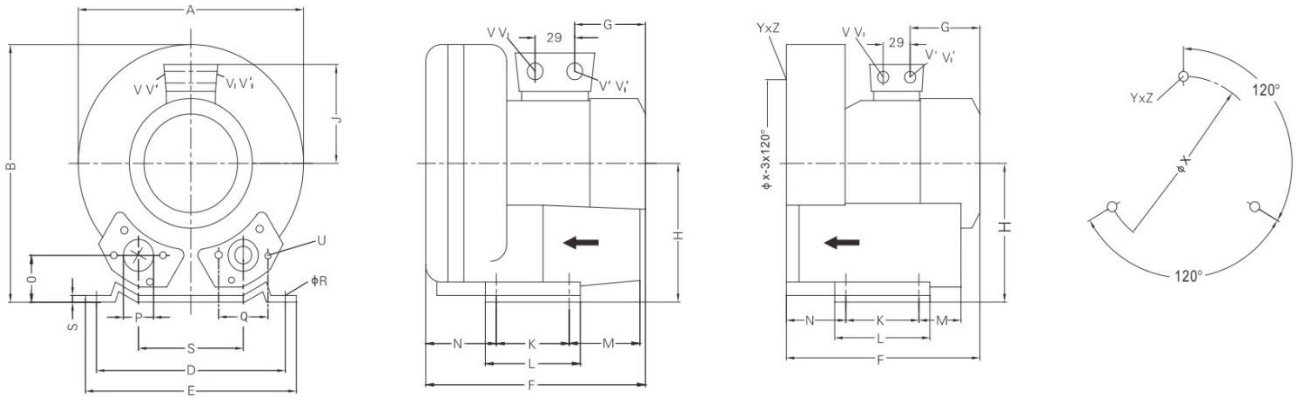

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O
STRC0070-1MA200-1	213	225	76	155	172	242	124	114	101	80	101	111	52	33
STRC0070-1MT200-6	213	225	76	155	172	242	124	114	101	80	101	111	52	33
STRC0070-1MA250-1	213	225	76	155	172	242	124	114	101	80	101	111	52	33
STRC0070-1MT250-6	213	225	76	155	172	242	124	114	101	80	101	111	52	33

Type	P	Q	ϕR	S	U	V	Y_Z	X-Holes	ϕX
STRC0070-1MA200-1	G 1"	46	8,5	2	M6 x 18	M16 x 1,5	M6 x 20	0/120º/240º	126
STRC0070-1MT200-6	G 1"	46	8,5	2	M6 x 18	M16 x 1,5	M6 x 20	0/120º/240º	126
STRC0070-1MA250-1	G 1"	46	8,5	2	M6 x 18	M16 x 1,5	M6 x 20	0/120º/240º	126
STRC0070-1MT250-6	G 1"	46	8,5	2	M6 x 18	M16 x 1,5	M6 x 20	0/120º/240º	126