

STRC0080-1M: Single stage Side Channel Blower




- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

Suction

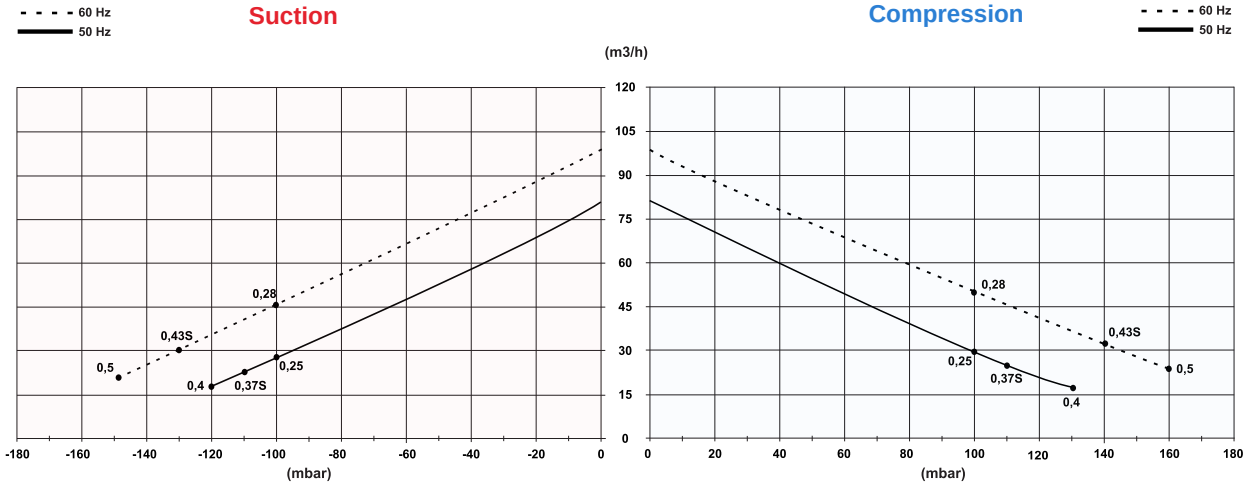

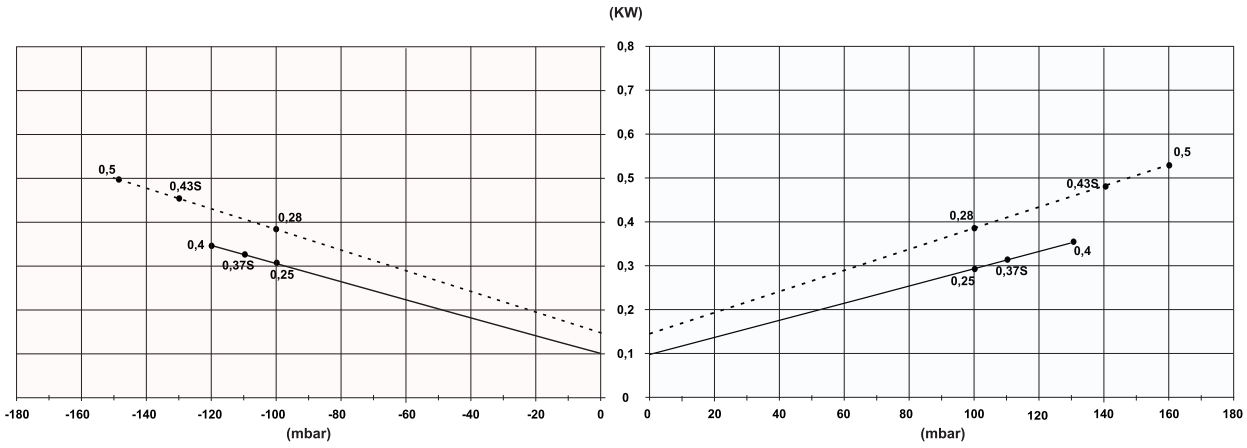

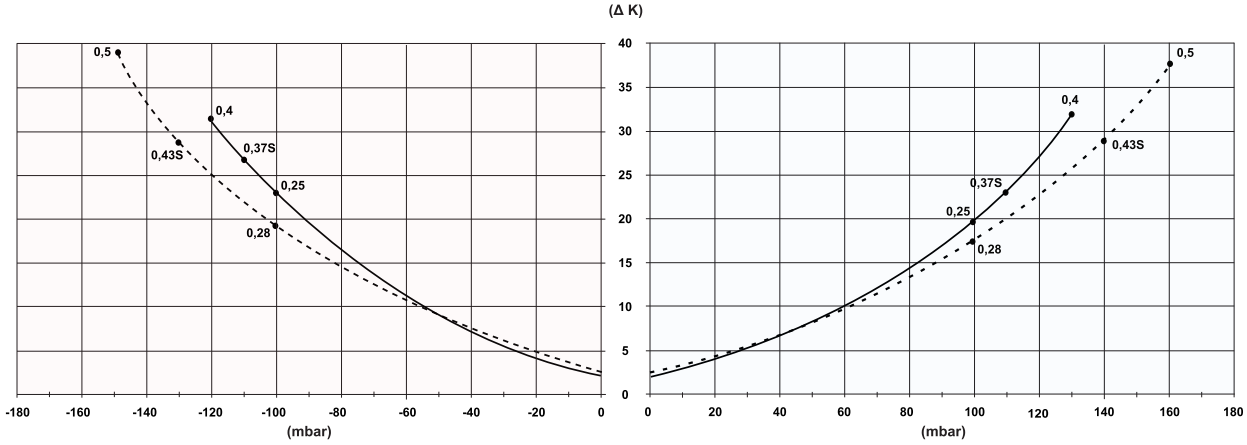

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Compression

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRC0080-1M: Single stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0080-1MT250-6	0,25	50	200-240 Δ / 345-415 Y	2,1 Δ / 1,2 Y	80	-100 / 100	53	9
	0,28	60	220-275 Δ / 380-480 Y	2,0 Δ / 1,15 Y	100	-100 / 100	56	
STRC0080-1MA370-1	0,37	50	230	2,7	80	-110 / 110	53	11
	0,43	60	230	3	100	-130 / 140	56	
STRC0080-1MT400-6	0,4	50	200-240 Δ / 345-415 Y	2,6 Δ / 1,5 Y	80	-120 / 130	53	10
	0,5	60	220-275 Δ / 380-480 Y	2,6 Δ / 1,5 Y	100	-150 / 160	56	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T...-5	50	500 Δ
	60	575 Δ
STRC ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A...-1	50	230
	60	230
STRC ….-..S...-5	50	115/230
	60	115/230

Dimensions

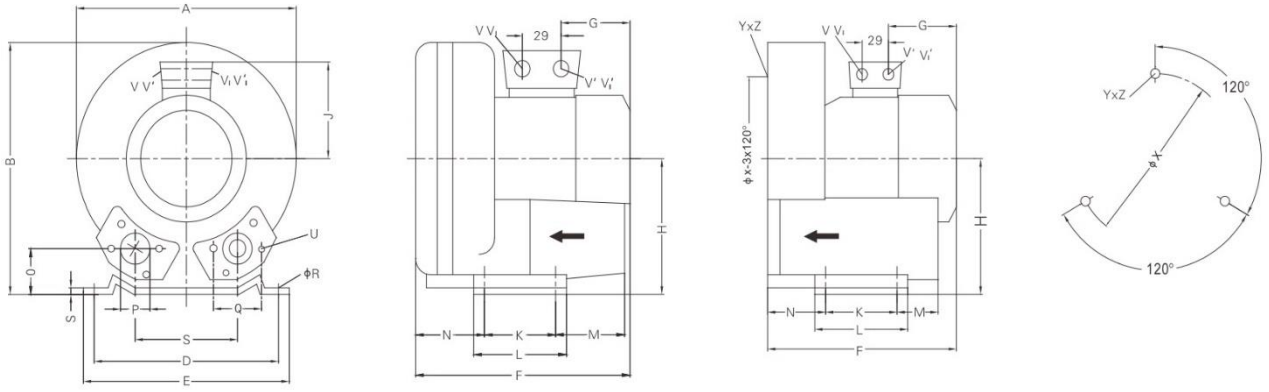

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX
STRC0080-1MT250-6	246	247	90	205	230	219	92	128	111	83	108	75	71	39	G 1 1/4"	64	10	2,5	M6 x 17	M25 x 1,5	M16 x 1,5	M6 x 15	0/120º/240º	140
STRC0080-1MA370-1	246	247	90	205	230	256	135	128	111	83	108	75	71	39	G 1 1/4"	64	10	2,5	M6 x 17	M16 x 1,5	M25 x 1,5	M6 x 15	0/120º/240º	140
STRC0080-1MT400-6	246	247	90	205	230	256	135	128	111	83	108	75	71	39	G 1 1/4"	64	10	2,5	M6 x 17	M25 x 1,5	M16 x 1,5	M6 x 15	0/120º/240º	140