
STRC0080-2S: Double stage Side Channel Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

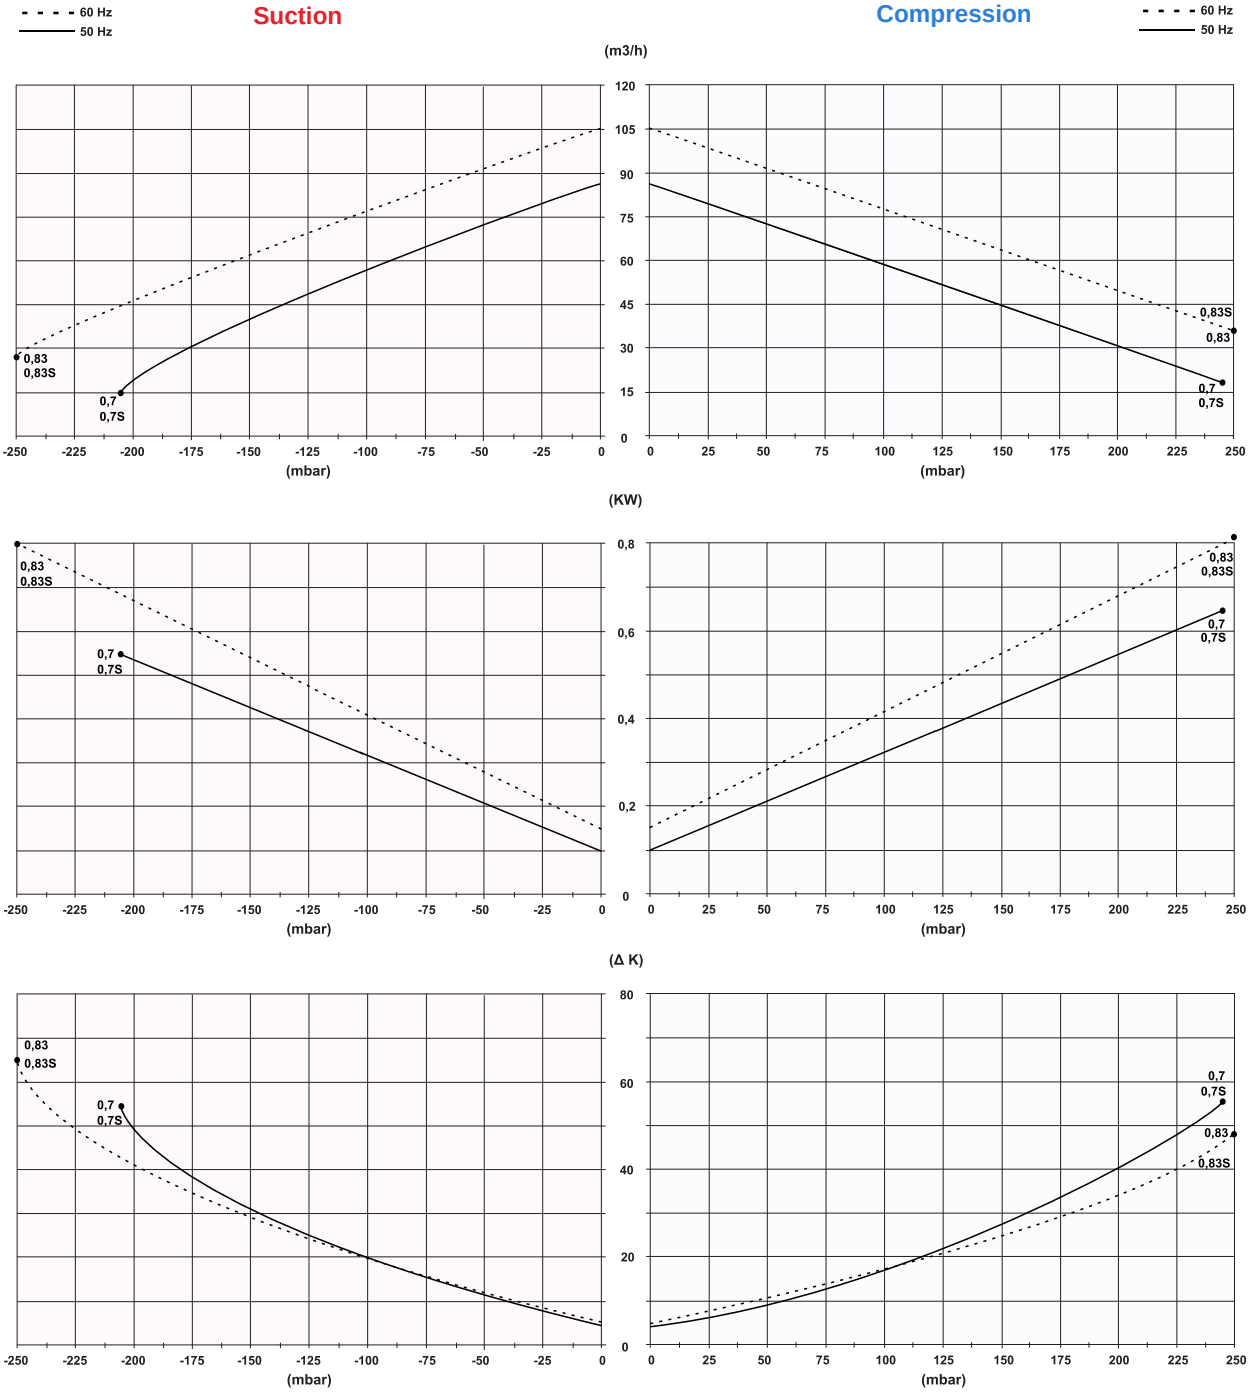

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRC0080-2S: Double stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0080-2SA700-1	0,7	50	230	4,5	85	-210 / 240	55	15
	0,83	60	230	5,6	105	-250 / 250	61	
STRC0080-2ST700-6	0,7	50	200-240 Δ / 345-415 Y	3,8 Δ / 2,2 Y	85	-210 / 240	55	15
	0,83	60	220-275 Δ / 380-480 Y	3,75 Δ / 2,15 Y	105	-250 / 250	61	

1) Other voltages are available on request


2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C
Inlet temperature: -25°… 40°C
Max. installation height: 1000 m
Bimetal motor protection

Type	Hz	V
STRC ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T...-5	50	500 Δ
	60	575 Δ
STRC ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A...-1	50	230
	60	230
STRC ….-..S...-5	50	115/230
	60	115/230

Dimensions

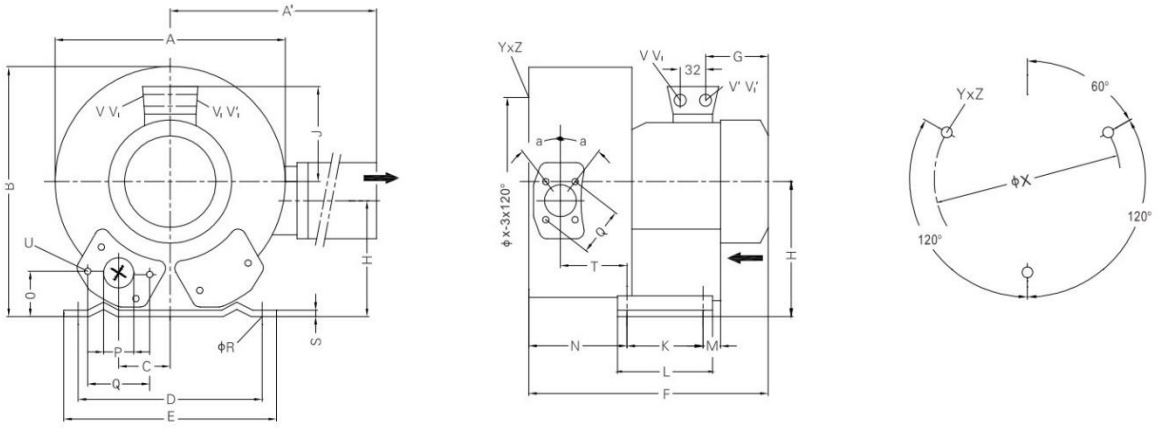

Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes
STRC0080-2SA700-1	284	316	270	45	205	230	316	135	128	106	111	83	108	75	130	39	G 1 1/4"	64	10	2,5	88	M6 x 17	M25 x 1,5	M16 x 1,5	140	M6 x 15	51º/171º/291º
STRC0080-2ST700-6	284	316	270	45	205	230	316	135	128	106	111	83	108	75	130	39	G 1 1/4"	64	10	2,5	88	M6 x 17	M25 x 1,5	M16 x 1,5	140	M6 x 15	51º/171º/291º