
STRC0140-1M: Single stage Side Channel Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

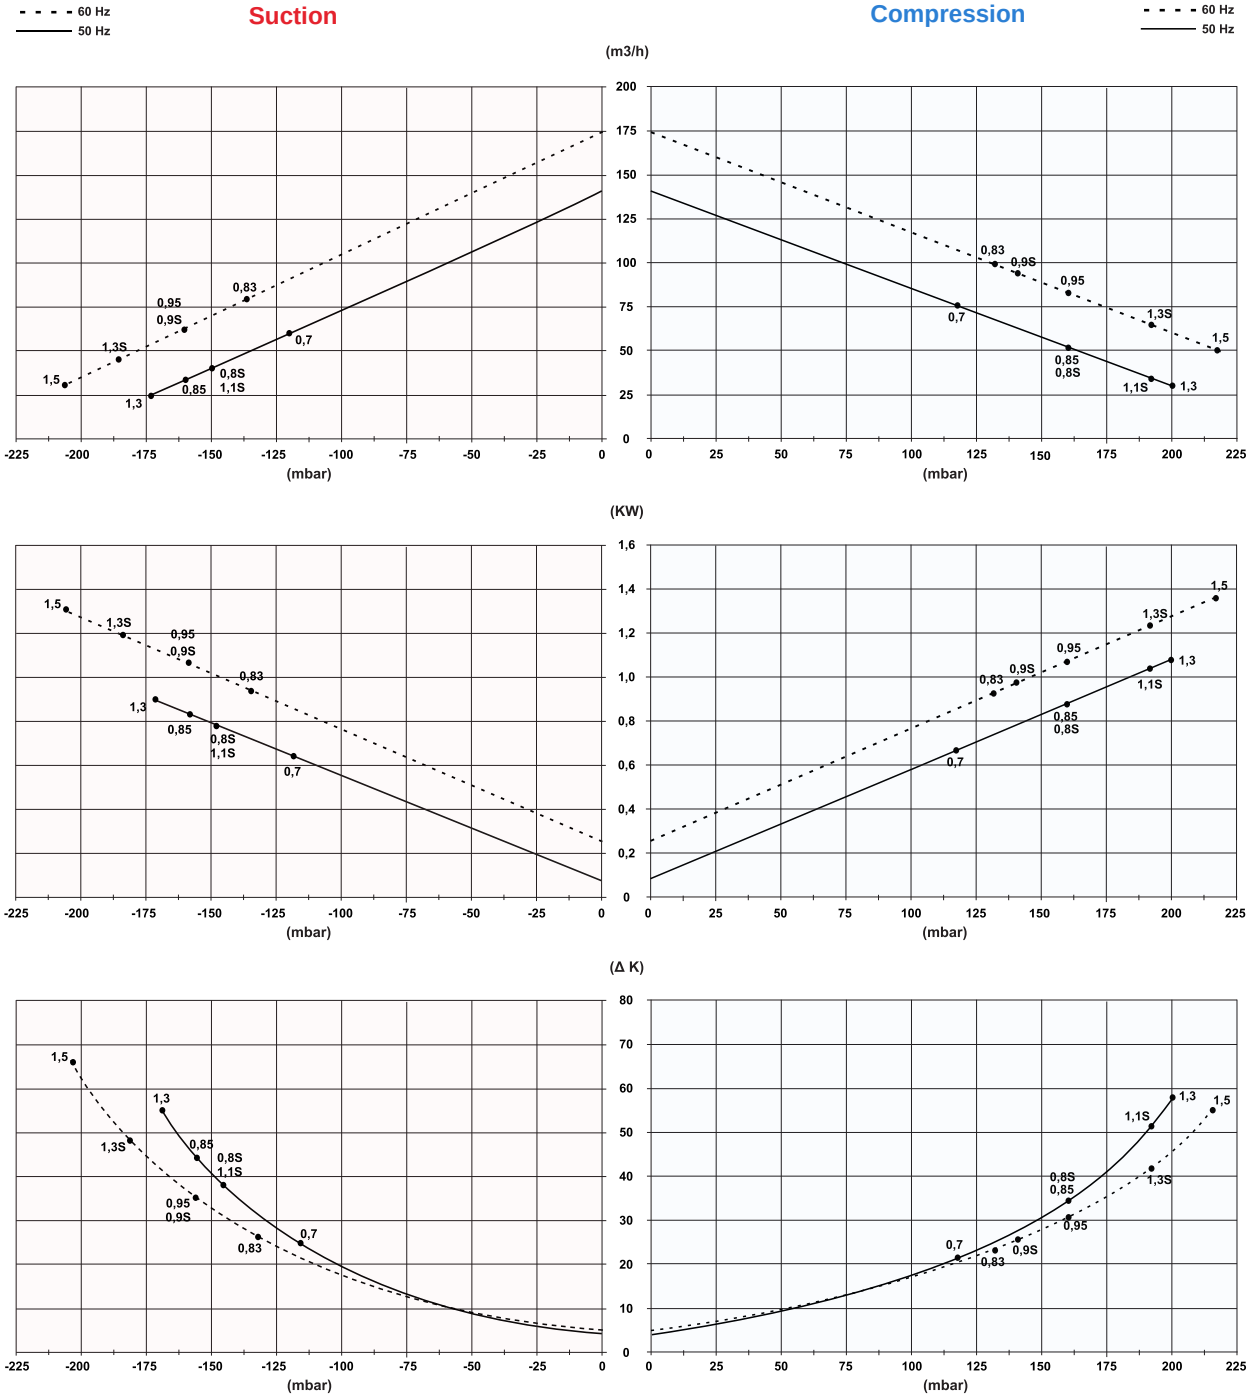

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

STRC0140-1M: Single stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0140-1MT700-6	0,7	50	200-240 Δ / 345-415 Y	3,8 Δ / 2,2 Y	140	-120 / 120	63	13
	0,83	60	220-275 Δ / 380-480 Y	3,75 Δ / 2,15 Y	175	-130 / 130	64	
STRC0140-1MA800-1	0,8	50	230	5,2	140	-150 / 160	63	15
	0,9	60	230	5,8	175	-160 / 140	64	
STRC0140-1MT850-6	0,85	50	200-240 Δ / 345-415 Y	4,2 Δ / 2,4 Y	140	-160 / 160	63	16
	0,95	60	220-275 Δ / 380-480 Y	4,0 Δ / 2,3 Y	175	-160 / 160	64	
STRC0140-1MA111-1	1,1	50	230	7,3	140	-150 / 190	63	16
	1,3	60	230	8,3	175	-180 / 190	64	
STRC0140-1MT131-6	1,3	50	200-240 Δ / 345-415 Y	5,7 Δ / 3,3 Y	140	-170 / 200	63	17
	1,5	60	220-275 Δ / 380-480 Y	5,7 Δ / 3,3 Y	175	-210 / 220	64	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T...-5	50	500 Δ
	60	575 Δ
STRC ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A...-1	50	230
	60	230
STRC ….-..S...-5	50	115/230
	60	115/230

Dimensions

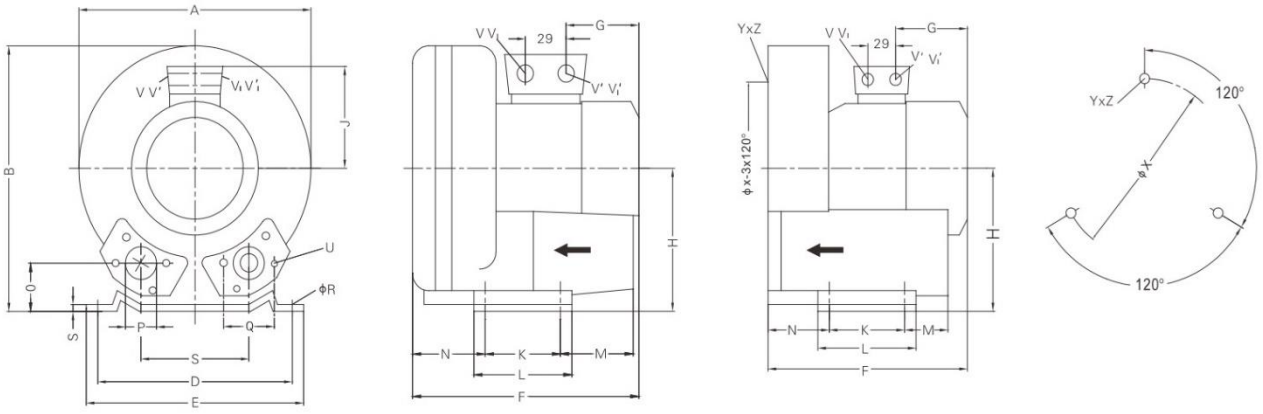

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ΦR	S	U	V	V'	Y_Z	X-Holes	ΦX
STRC0140-1MT700-6	286	302	115	225	225	269	129	154	111	95	130	70	75	46	G 1 1/2"	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120°/240°	174
STRC0140-1MA800-1	286	302	115	225	225	294	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120°/240°	174
STRC0140-1MT850-6	286	302	115	225	225	292	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120°/240°	174
STRC0140-1MA111-1	286	302	115	225	225	294	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120°/240°	174
STRC0140-1MT131-6	286	302	115	225	225	292	156	154	120	95	130	70	75	46	G 1 1/2"	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120°/240°	174