

STRC0140-2S: Double stage Side Channel Blower




- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

Suction

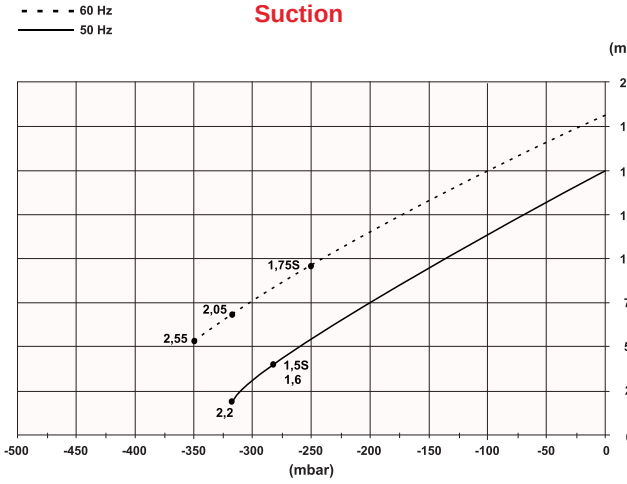


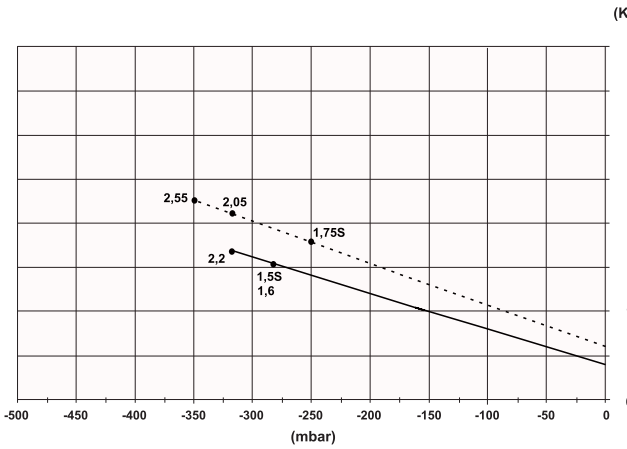


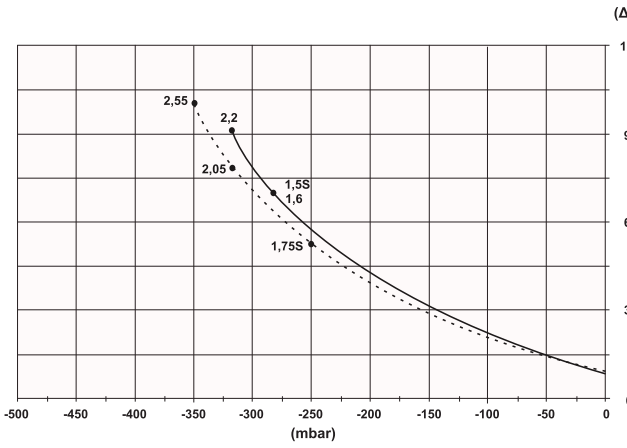


Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Compression

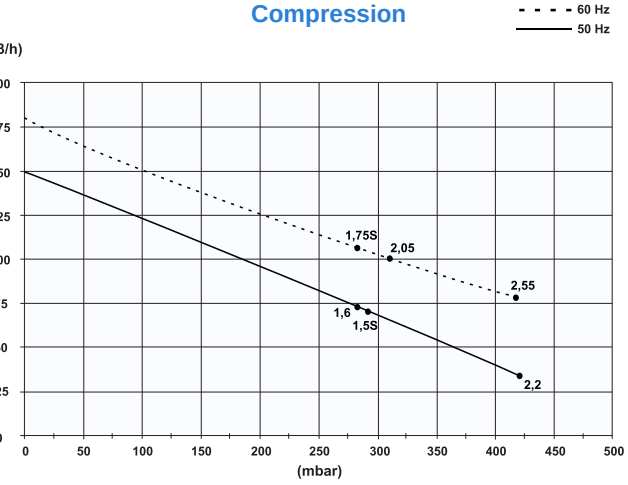

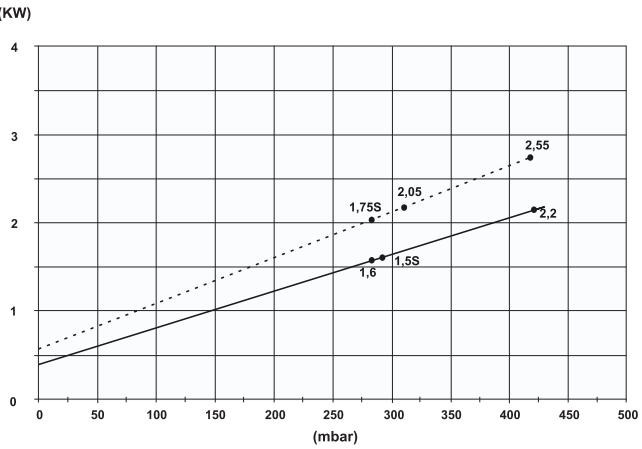

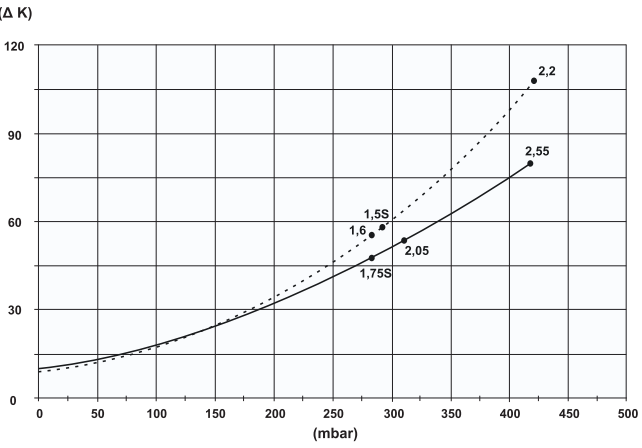

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRC0140-2S: Double stage Side Channel Blower

Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tolerance: ± 10%; ambient temperature: -20° to +40°C

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0140-2SA151-1	1,5	50	230	9	150	-280 / 290	66	26
	1,75	60	230	10	180	-250 / 280	69	
STRC0140-2ST161-6	1,6	50	200-240 Δ / 345-415 Y	7,5 Δ / 4,3 Y	150	-280 / 280	66	25
	20,5	60	220-275 Δ / 380-480 Y	7,6 Δ / 4,4 Y	180	-320 / 310	69	
STRC0140-2ST221-6	2,2	50	200-240 Δ / 345-415 Y	9,7 Δ / 5,6 Y	150	-320 / 420	66	27
	2,55	60	220-275 Δ / 380-480 Y	10,3 Δ / 6,0 Y	180	-350 / 420	69	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T...-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T...-5	50	500 Δ
	60	575 Δ
STRC ….-..T...-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T...-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A...-1	50	230
	60	230
STRC ….-..S...-5	50	115/230
	60	115/230

Dimensions

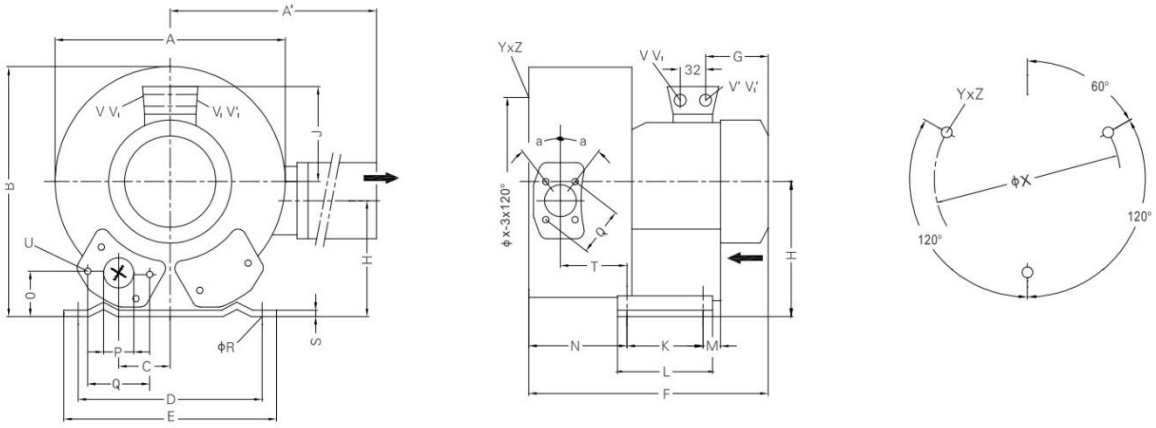

Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes
STRC0140-2SA151-1	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G 1 1/2"	72	12	3	104	M6 x 19	M25 x 1,5	M16 x 1,5	174	M6 x 19	51º/171º/291º
STRC0140-2ST161-6	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G 1 1/2"	72	12	3	104	M6 x 19	M25 x 1,5	M16 x 1,5	174	M6 x 15	51º/171º/291º
STRC0140-2ST221-6	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G 1 1/2"	72	12	3	104	M6 x 19	M16 x 1,5	M25 x 1,5	174	M6 x 15	51º/171º/291º