STRC0180-1M: Single stage Side Channel Blower




- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization


Suction

60 Hz
50 Hz


(m3/h)

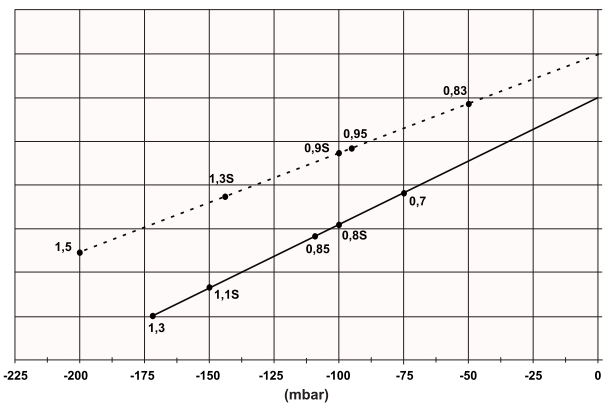

(KW)

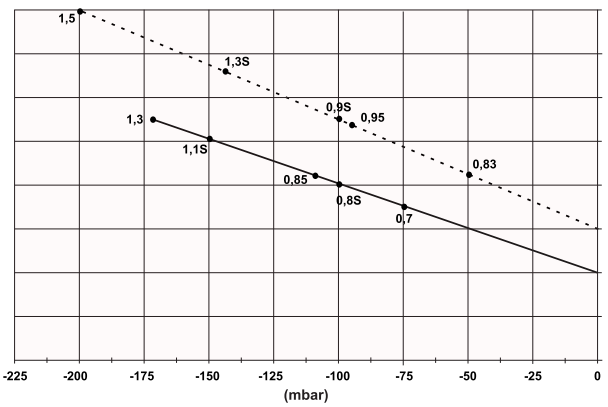

(Δ K)

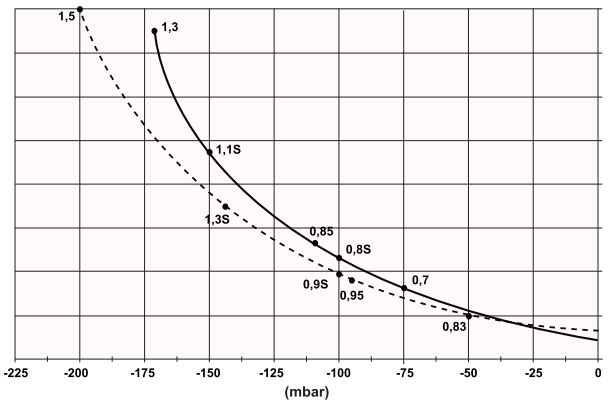


Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C


Compression

60 Hz
50 Hz


(m3/h)

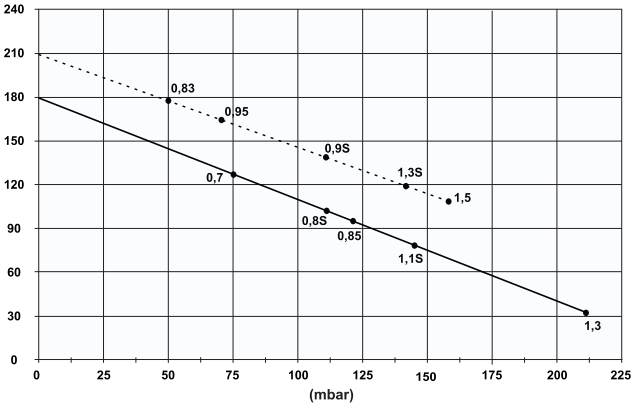

(KW)

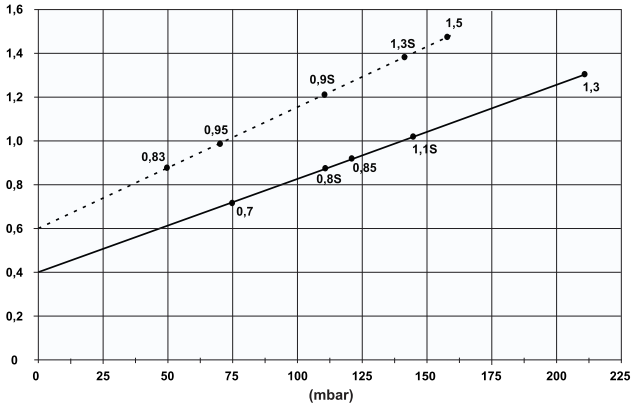

(Δ K)

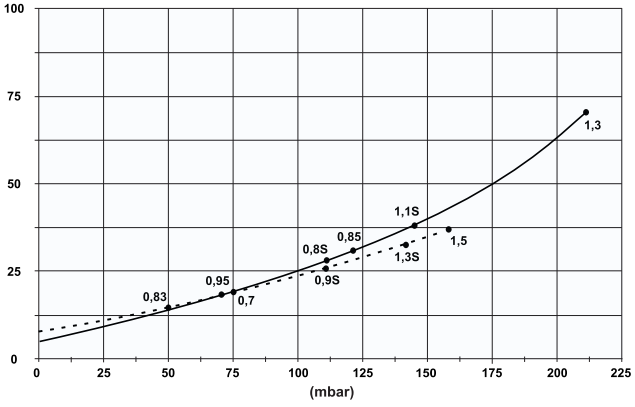

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRC0180-1M: Single stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0180-1MT700-6	0,7	50	200-240 Δ / 345-415 Y	3,8 Δ / 2,2 Y	180	-75 / 75	64	15
	0,83	60	220-275 Δ / 380-480 Y	3,75 Δ / 2,15 Y	210	-50 / 50	66	
STRC0180-1MA800-1	0,8	50	230	5,2	180	-100 / 110	64	16
	0,9	60	230	5,8	210	-100 / 110	66	
STRC0180-1MT850-6	0,85	50	200-240 Δ / 345-415 Y	4,2 Δ / 2,4 Y	180	-120 / 120	64	17
	0,95	60	220-275 Δ / 380-480 Y	4,0 Δ / 2,3 Y	210	-90 / 70	66	
STRC0180-1MA111-1	1,1	50	230	7,3	180	-150 / 140	64	17
	1,3	60	230	8,3	210	-140 / 130	66	
STRC0180-1MT131-6	1,3	50	200-240 Δ / 345-415 Y	5,7 Δ / 3,3 Y	180	-170 / 210	64	18
	1,5	60	220-275 Δ / 380-480 Y	5,7 Δ / 3,3 Y	210	-200 / 160	66	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T…-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T…-5	50	500 Δ
	60	575 Δ
STRC ….-..T…-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T…-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A…-1	50	230
	60	230
STRC ….-..S…-5	50	115/230
	60	115/230

Dimensions

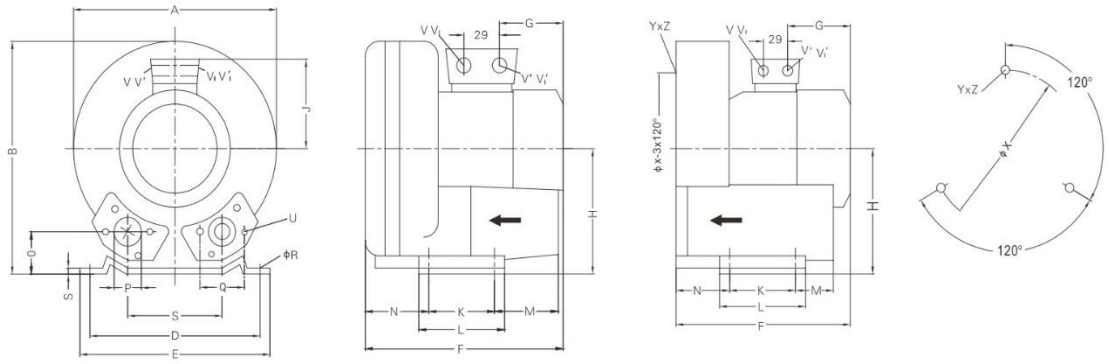

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P
STRC0180-1MT700-6	286	302	115	225	255	288	135	154	111	95	130	70	75	46	G 1 1/2"
STRC0180-1MA800-1	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"
STRC0180-1MT850-6	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"
STRC0180-1MA111-1	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"
STRC0180-1MT131-6	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"

Type	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX
STRC0180-1MT700-6	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120º/240º	174
STRC0180-1MA800-1	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120º/240º	174
STRC0180-1MT850-6	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120º/240º	174
STRC0180-1MA111-1	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120º/240º	174
STRC0180-1MT131-6	72	12	3	M6 x 19	M16 x 1,5	M25 x 1,5	M6 x 15	0/120º/240º	174