

STRC0210-2S: Double stage Side Channel Blower




- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

Suction

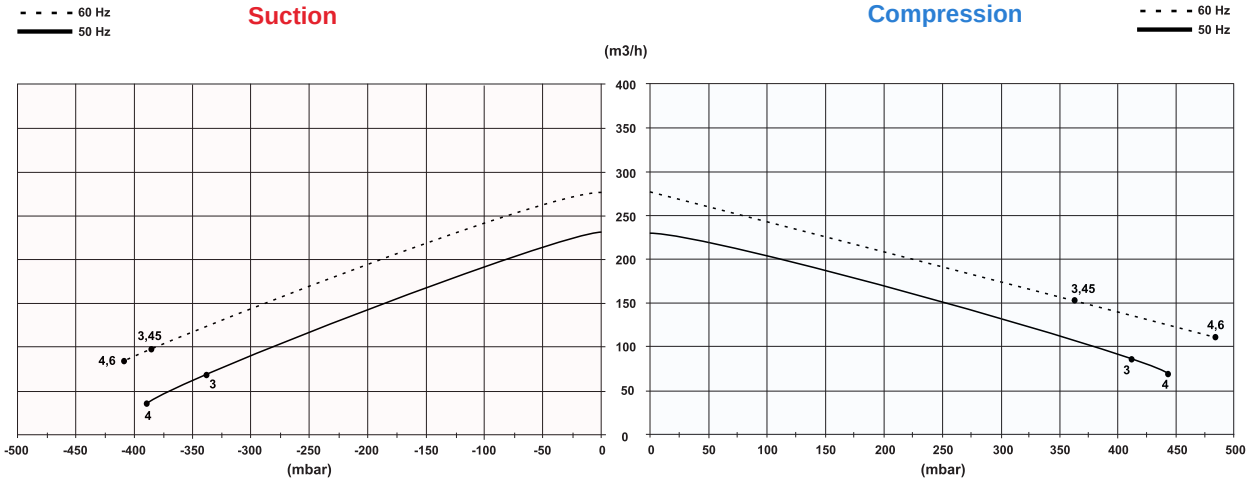

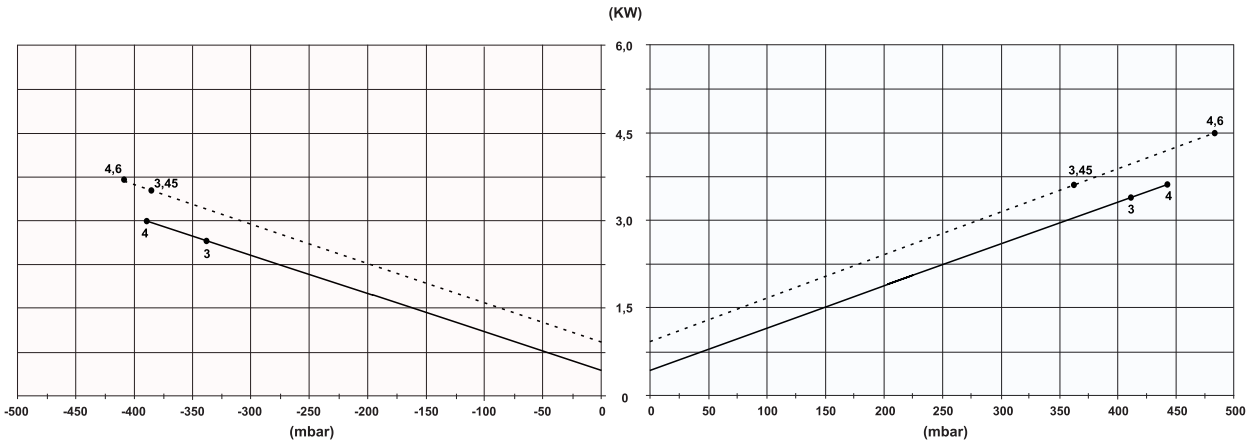

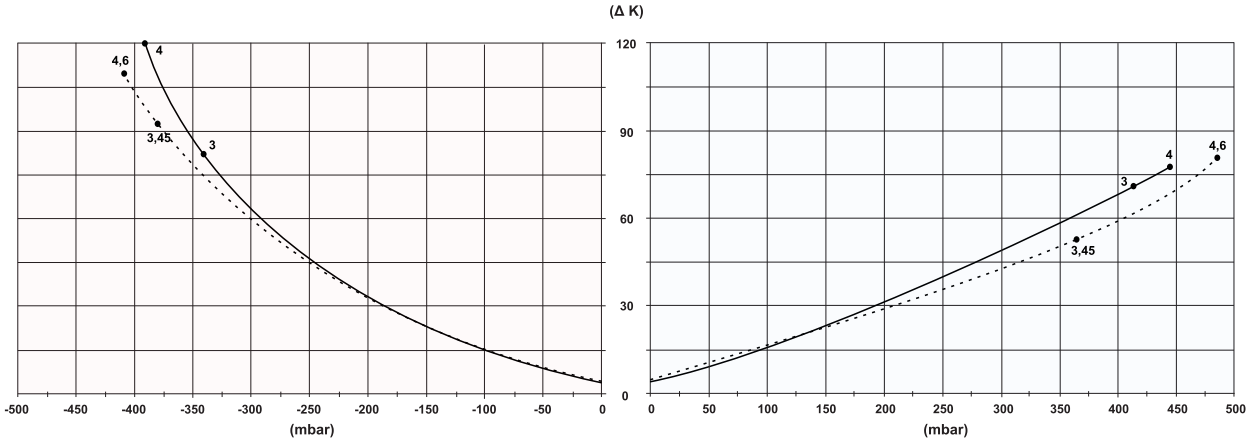

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Compression

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Tel: +1 438-880-4655

STRC0210-2S: Double stage Side Channel Blower

Technical data

Type	kW	Hz	V[1)]	A	m³/h	hPa (mbar)[2)]	dB(A)[3)]	kg
STRC0210-2ST301-6	3	50	200-240 Δ / 345-415 Y	12,5 Δ / 7,2 Y	230	-340 / 410	72	40
	3,45	60	220-275 Δ / 380-480 Y	12,6 Δ / 7,3 Y	275	-380 / 360	74	
STRC0210-2ST401-7	4	50	345-415 Δ / 600-720 Y	9,0 Δ / 5,2 Y	230	-390 / 440	72	44
	4,6	60	380-480 Δ / 660-720 Y	9,0 Δ / 5,2 Y	275	-410 / 480	74	

1) Other voltages are available on request

2) Relief valves are available for limiting differential pressure

3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected

Ambient temperature: -25°… 40°C


Inlet temperature: -25°… 40°C

Max. installation height: 1000 m

Bimetal motor protection

Type	Hz	V
STRC ….-..T…-1	50	185-225 Δ / 320-390 Y
	60	200-240 Δ / 345-415 Y
STRC ….-..T…-5	50	500 Δ
	60	575 Δ
STRC ….-..T…-6	50	200-240 Δ / 345-415 Y
	60	220-275 Δ / 380-480 Y
STRC ….-..T…-7	50	345-415 Δ / 600-720 Y
	60	380-480 Δ / 660-720 Y
STRC ….-..A…-1	50	230
	60	230
STRC ….-..S…-5	50	115/230
	60	115/230

Dimensions

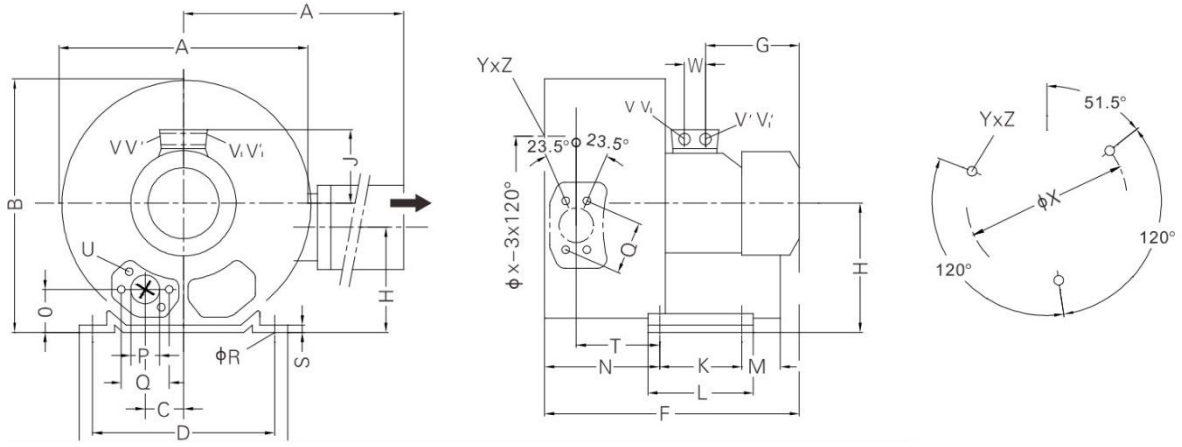

Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes
STRC0210-2ST301-6	372	411	371	60	260	295	465	190	175	144	135	115	155	98	171	48	G 2"	83	14	4	116	M8 x 17	M32 x 1,5	M32 x 1,5	200	M8 x 20	51,5º/171,5º/291,5º
STRC0210-2ST401-7	372	411	371	60	260	295	499	224	175	144	135	115	155	98	171	48	G 2"	83	14	4	116	M8 x 17	M32 x 1,5	M32 x 1,5	200	M8 x 20	51,5º/171,5º/291,5º

Tel: +1 438-880-4655