
# **STRC0315-2S**: Double stage Side Channel Blower



- Maintenance free. Oil free compression
- 50/60 Hz motors, insulation class F. IP55 protection rating. Thermal protection as standard
- Frequency converter operation allowed
- Customization

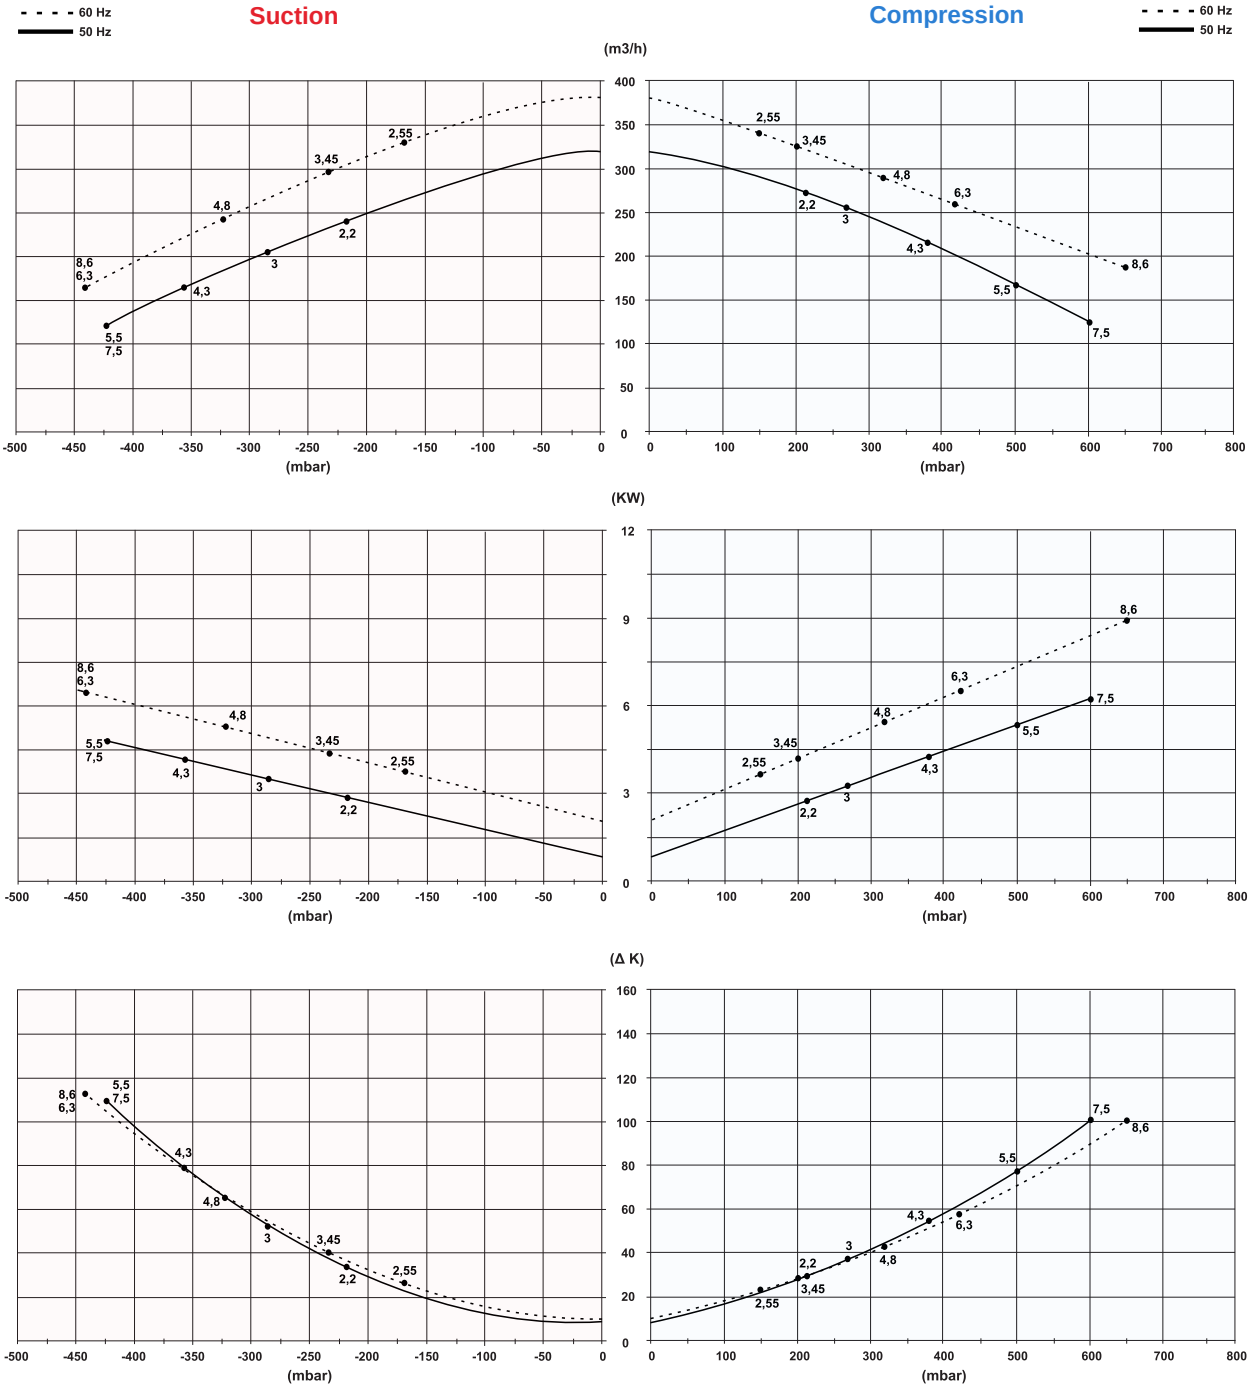


Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric backpressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

Curves are valid for continuous operation; medium: air at 15°C, measured at inlet port and 1013 hPa (mbar abs.) atmospheric pressure, Tolerance: ± 10%; ambient temperature: -20° to +40°C

# **STRC0315-2S**: Double stage Side Channel Blower

## Technical data

| Type | kW | Hz | V[1)] | A | m³/h | hPa (mbar)[2)] | dB(A)[3)] | kg |
|---|---|---|---|---|---|---|---|---|
| **STRC0315-2ST221-6** | 2,2 | 50 | 200-240 Δ / 345-415 Y | 9,7 Δ / 5,6 Y | 315 | -220 / 210 | 73 | 43 |
| | 2,55 | 60 | 220-275 Δ / 380-480 Y | 10,3 Δ / 6,0 Y | 375 | -170 / 150 | 76 | |
| **STRC0315-2ST301-6** | 3 | 50 | 200-240 Δ / 345-415 Y | 12,5 Δ / 7,2 Y | 315 | -280 / 260 | 73 | 48 |
| | 3,45 | 60 | 220-275 Δ / 380-480 Y | 12,6 Δ / 7,3 Y | 375 | -230 / 200 | 76 | |
| **STRC0315-2ST431-7** | 4,3 | 50 | 345-415 Δ / 600-720 Y | 10,0 Δ / 5,2 Y | 315 | -360 / 360 | 73 | 54 |
| | 4,8 | 60 | 380-480 Δ / 660-720 Y | 10,4 Δ / 6,0 Y | 375 | -320 / 330 | 76 | |
| **STRC0315-2ST551-7** | 5,5 | 50 | 345-415 Δ / 600-720 Y | 13,3 Δ / 7,7 Y | 315 | -420 / 500 | 73 | 66 |
| | 6,3 | 60 | 380-480 Δ / 660-720 Y | 13,3 Δ / 7,7 Y | 375 | -440 / 410 | 76 | |
| **STRC0315-2ST751-7** | 7,5 | 50 | 345-415 Δ / 600-720 Y | 16,7 Δ / 9,6 Y | 315 | -420 / 600 | 73 | 73 |
| | 8,6 | 60 | 380-480 Δ / 660-720 Y | 17,3 Δ / 10,0 Y | 375 | -440 / 650 | 76 | |

1) Other voltages are available on request


2) Relief valves are available for limiting differential pressure


3) Noise level measured acc. to EN ISO 3744 at a distance of 1 m with hoses connected


Ambient temperature: -25°… 40°C
Inlet temperature: -25°… 40°C
Max. installation height: 1000 m
Bimetal motor protection


| Type | Hz | V |
|---|---|---|
| **STRC ….-..T...-1** | 50 | 185-225 Δ / 320-390 Y |
| | 60 | 200-240 Δ / 345-415 Y |
| **STRC ….-..T...-5** | 50 | 500 Δ |
| | 60 | 575 Δ |
| **STRC ….-..T...-6** | 50 | 200-240 Δ / 345-415 Y |
| | 60 | 220-275 Δ / 380-480 Y |
| **STRC ….-..T...-7** | 50 | 345-415 Δ / 600-720 Y |
| | 60 | 380-480 Δ / 660-720 Y |
| **STRC ….-..A...-1** | 50 | 230 |
| | 60 | 230 |
| **STRC ….-..S...-5** | 50 | 115/230 |
| | 60 | 115/230 |

## Dimensions

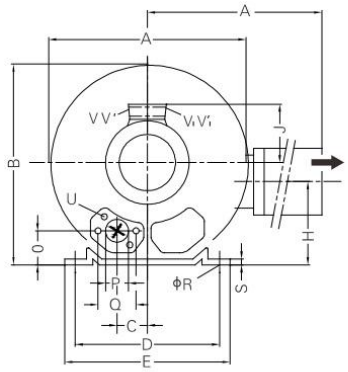


| Type | A | A' | B | C | D | E | F | G | H | H' | J | K | L | M | N | O | P | Q | ϕR | S | T | U | V | V' | ϕX | Y_Z | X-Holes | W |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STRC0315-2ST221-6 | 426 | 426 | 420 | 63 | 290 | 325 | 473 | 185 | 197 | 162 | 128 | 140 | 180 | 84 | 205 | 53 | G 2" | 83 | 15 | 4,5 | 130 | M8 x 17 | M25 x 1,5 | M16 x 1,5 | 240 | M10 x 20 | 51,5º/171,5º/291,5º | 29 |
| STRC0315-2ST301-6 | 426 | 426 | 420 | 63 | 290 | 325 | 507 | 180 | 197 | 162 | 135 | 140 | 180 | 84 | 205 | 53 | G 2" | 83 | 15 | 4,5 | 130 | M8 x 17 | M32 x 1,5 | M32 x 1,5 | 240 | M10 x 20 | 51,5º/171,5º/291,5º | 42 |
| STRC0315-2ST431-7 | 426 | 426 | 420 | 63 | 290 | 325 | 526 | 209 | 197 | 162 | 148 | 140 | 180 | 84 | 205 | 53 | G 2" | 83 | 15 | 4,5 | 130 | M8 x 17 | M32 x 1,5 | M32 x 1,5 | 240 | M10 x 20 | 51,5º/171,5º/291,5º | 42 |
| STRC0315-2ST551-7 | 426 | 426 | 420 | 154 | 290 | 325 | 571 | 226 | 197 | 162 | 167 | 140 | 180 | 225 | 205 | 94 | G 2" | 83 | 15 | 4,5 | 130 | M8 x 17 | M32 x 1,5 | M32 x 1,5 | 240 | M10 x 20 | 51,5º/171,5º/291,5º | 42 |
| STRC0315-2ST751-7 | 426 | 426 | 420 | 154 | 290 | 325 | 571 | 226 | 197 | 162 | 167 | 140 | 180 | 225 | 205 | 94 | G 2" | 83 | 15 | 4,5 | 130 | M8 x 17 | M32 x 1,5 | M32 x 1,5 | 240 | M10 x 20 | 51,5º/171,5º/291,5º | 42 |



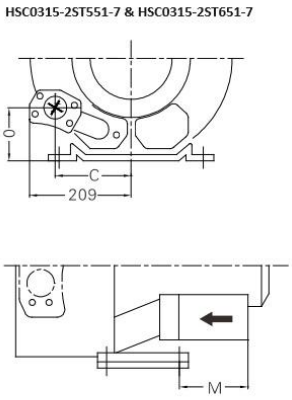
Tel: +1 438-880-4655